



TABLE 1		INSERTION LOSS (MAX dB) 40GHz	VSWR DC ~ 40GHz
MODEL NUMBER	LENGTH		
415-0543-006	6.00 +.157/-0	-2.5	1.33
415-0543-012	12.00 +.196/-0	-4.1	1.33
415-0543-018	18.00 +.314/-0	-5.8	1.33
415-0543-024	24.00 +.393/-0	-7.3	1.33
415-0543-036	36.00 +.590/-0	-10.6	1.33

REV	ECO	DATE
1	INITIAL RELEASE	02-01-2023

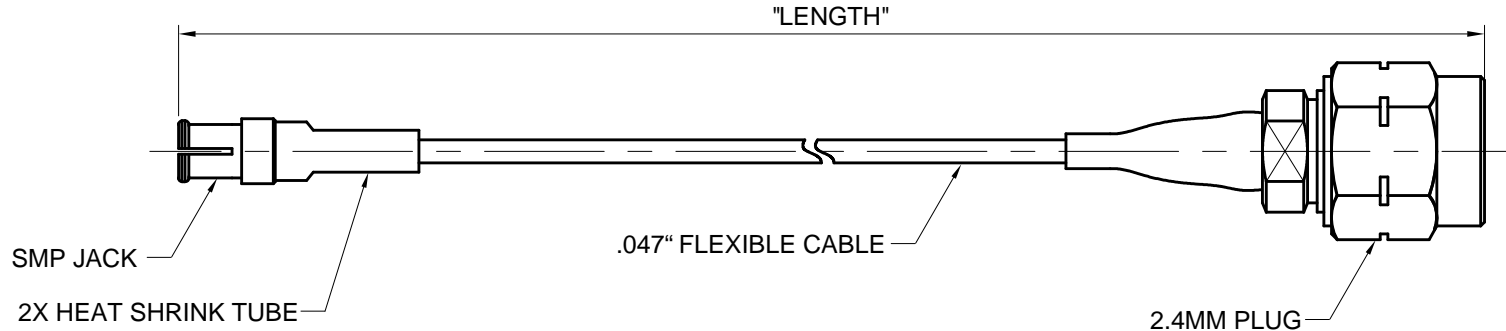

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.

 <small>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.</small> <small>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018.</small>	Model No:	415-0543-001/999		JOHNSON			
	RoHS <input checked="" type="checkbox"/> (EU)/2015/863 COMPLIANT	Cage Code	34078		Title:	CABLE ASSY, STR SMP JACK TO STR 2.4MM PLUG, .047" FLEXIBLE CABLE	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°	3RD ANGLE PROJECTION	Drawn by:	TOMMY REN		Drawing No.	415-0543-001/999
	Date:	02-01-2023	Size	A	DO NOT SCALE DRAWING	Workmanship Std. Sheet	NONE
					REV.	1	
					1 OF 1		