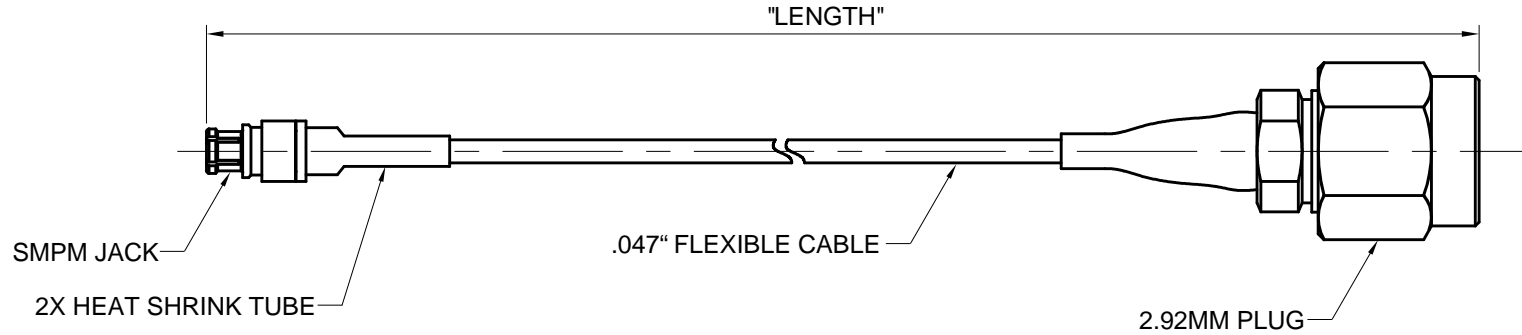




TABLE 1		INSERTION LOSS (MAX dB) 40GHz	VSWR DC ~ 40GHz
MODEL NUMBER	LENGTH		
415-0544-MM100	100mm +4/-0	-2.4	1.4
415-0544-MM200	200mm +5/-0	-3.3	1.4
415-0544-MM500	500mm +10/-0	-5.7	1.4
415-0544-M1.0	1000mm +15/-0	-10.0	1.4

REV	ECO	DATE
1	INITIAL RELEASE	02-01-2023



- NOTES: UNLESS OTHERWISE SPECIFIED.
- CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS FOR A PERIOD OF ONE MINUTE.
 - CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.

 <p>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018.</p>	Model No: 415-0544-MXXXX	JOHNSON		
	RoHS <input checked="" type="checkbox"/> (EU)/2015/863 COMPLIANT	Cage Code 34078	Title: CABLE ASSY, METRIC, STR SMPM JACK TO STR 2.92MM PLUG, .047" FLEXIBLE CABLE	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°	3RD ANGLE PROJECTION 	Drawing No. 415-0544-MXXXX	
	Drawn by: TOMMY REN	Date: 02-01-2023	Size A	DO NOT SCALE DRAWING Workmanship Std. Sheet NONE
		REV. 1	1 OF 1	