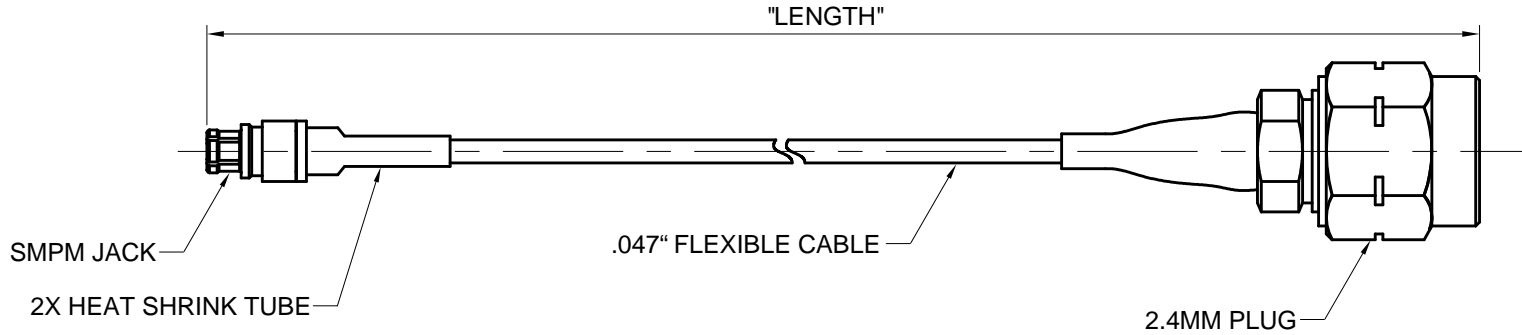




TABLE 1		INSERTION LOSS (MAX dB) 50GHz	VSWR DC ~ 50GHz
MODEL NUMBER	LENGTH		
415-0545-006	6.00 +.157/-0	-2.6	1.5
415-0545-012	12.00 +.196/-0	-4.2	1.5
415-0545-018	18.00 +.314/-0	-5.9	1.5
415-0545-024	24.00 +.393/-0	-7.4	1.5
415-0545-036	36.00 +.590/-0	-10.7	1.5

REV	ECO	DATE
1	INITIAL RELEASE	02-01-2023



- NOTES: UNLESS OTHERWISE SPECIFIED.
1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS FOR A PERIOD OF ONE MINUTE.
  2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.

 <p>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018.</p>	Model No: <b>415-0545-001/999</b>	<b>JOHNSON</b>		
	RoHS <input checked="" type="checkbox"/> (EU)/2015/863 COMPLIANT	Cage Code <b>34078</b>	Title: <b>CABLE ASSY, STR SMPM JACK TO STR 2.4MM PLUG, .047" FLEXIBLE CABLE</b>	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°	3RD ANGLE PROJECTION 	Drawing No. <b>415-0545-001/999</b>	REV. <b>1</b>
	Drawn by: <b>TOMMY REN</b>	Date: <b>02-01-2023</b>	Size <b>A</b>	DO NOT SCALE DRAWING Workmanship Std. Sheet NONE 1 OF 1