

Precision Adapters

2.4 mm to 2.92 mm

Midwest Microwave introduces high performance precision coaxial adapters with up to 40 GHz operation. These adapters incorporate design features that provide consistent low VSWR and insertion loss performance in a minimum length compact physical package.

Specially designed version of these and other adapters are also available in a wide variety of configurations and interfaces upon request.



Features & Benefits


- 40 GHz operation
- Low VSWR and insertion loss
- 100% swept frequency tested
- MIL-C-39012 interfaces
- Rugged stainless steel construction
- Operating temperature range -65°C to +125°C

Applications

- High-end commercial
- Laboratory, tests and measurements, and calibration use
- Military use

2.4 mm Male to 2.92 mm(SMK) Male

Part Number	Material	Impedance	Maximum Frequency	VSWR
ADT-3105-KM-24M-02	Passivated Stainless Steel	50 Ohms	DC - 40 GHz	1.15 Max

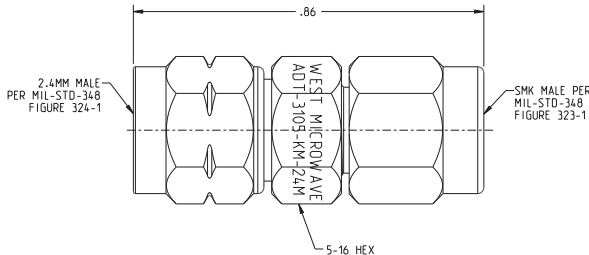


Precision Adapters

2.4 mm to 2.92 mm


2.4 mm Female to 2.92 mm(SMK) Male

Part Number	Material	Impedance	Maximum Frequency	VSWR
ADT-3106-KM-24F-02	Passivated Stainless Steel	50 Ohms	DC - 40 GHz	1.15 Max

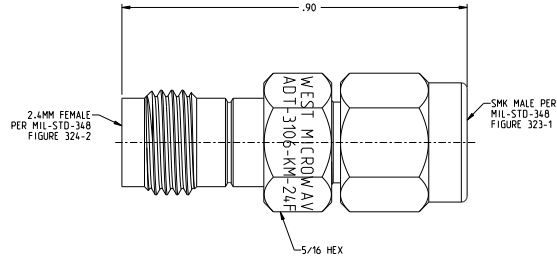

2.4 mm Male to 2.92 mm(SMK) Female

Part Number	Material	Impedance	Maximum Frequency	VSWR
ADT-3107-KF-24M-02	Passivated Stainless Steel	50 Ohms	DC - 40 GHz	1.15 Max

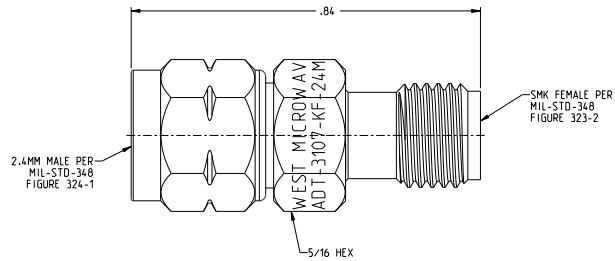

2.4 mm Female to 2.92 mm(SMK) Female

Part Number	Material	Impedance	Maximum Frequency	VSWR
ADT-3108-KF-24F-02	Passivated Stainless Steel	50 Ohms	DC - 40 GHz	1.15 Max

