


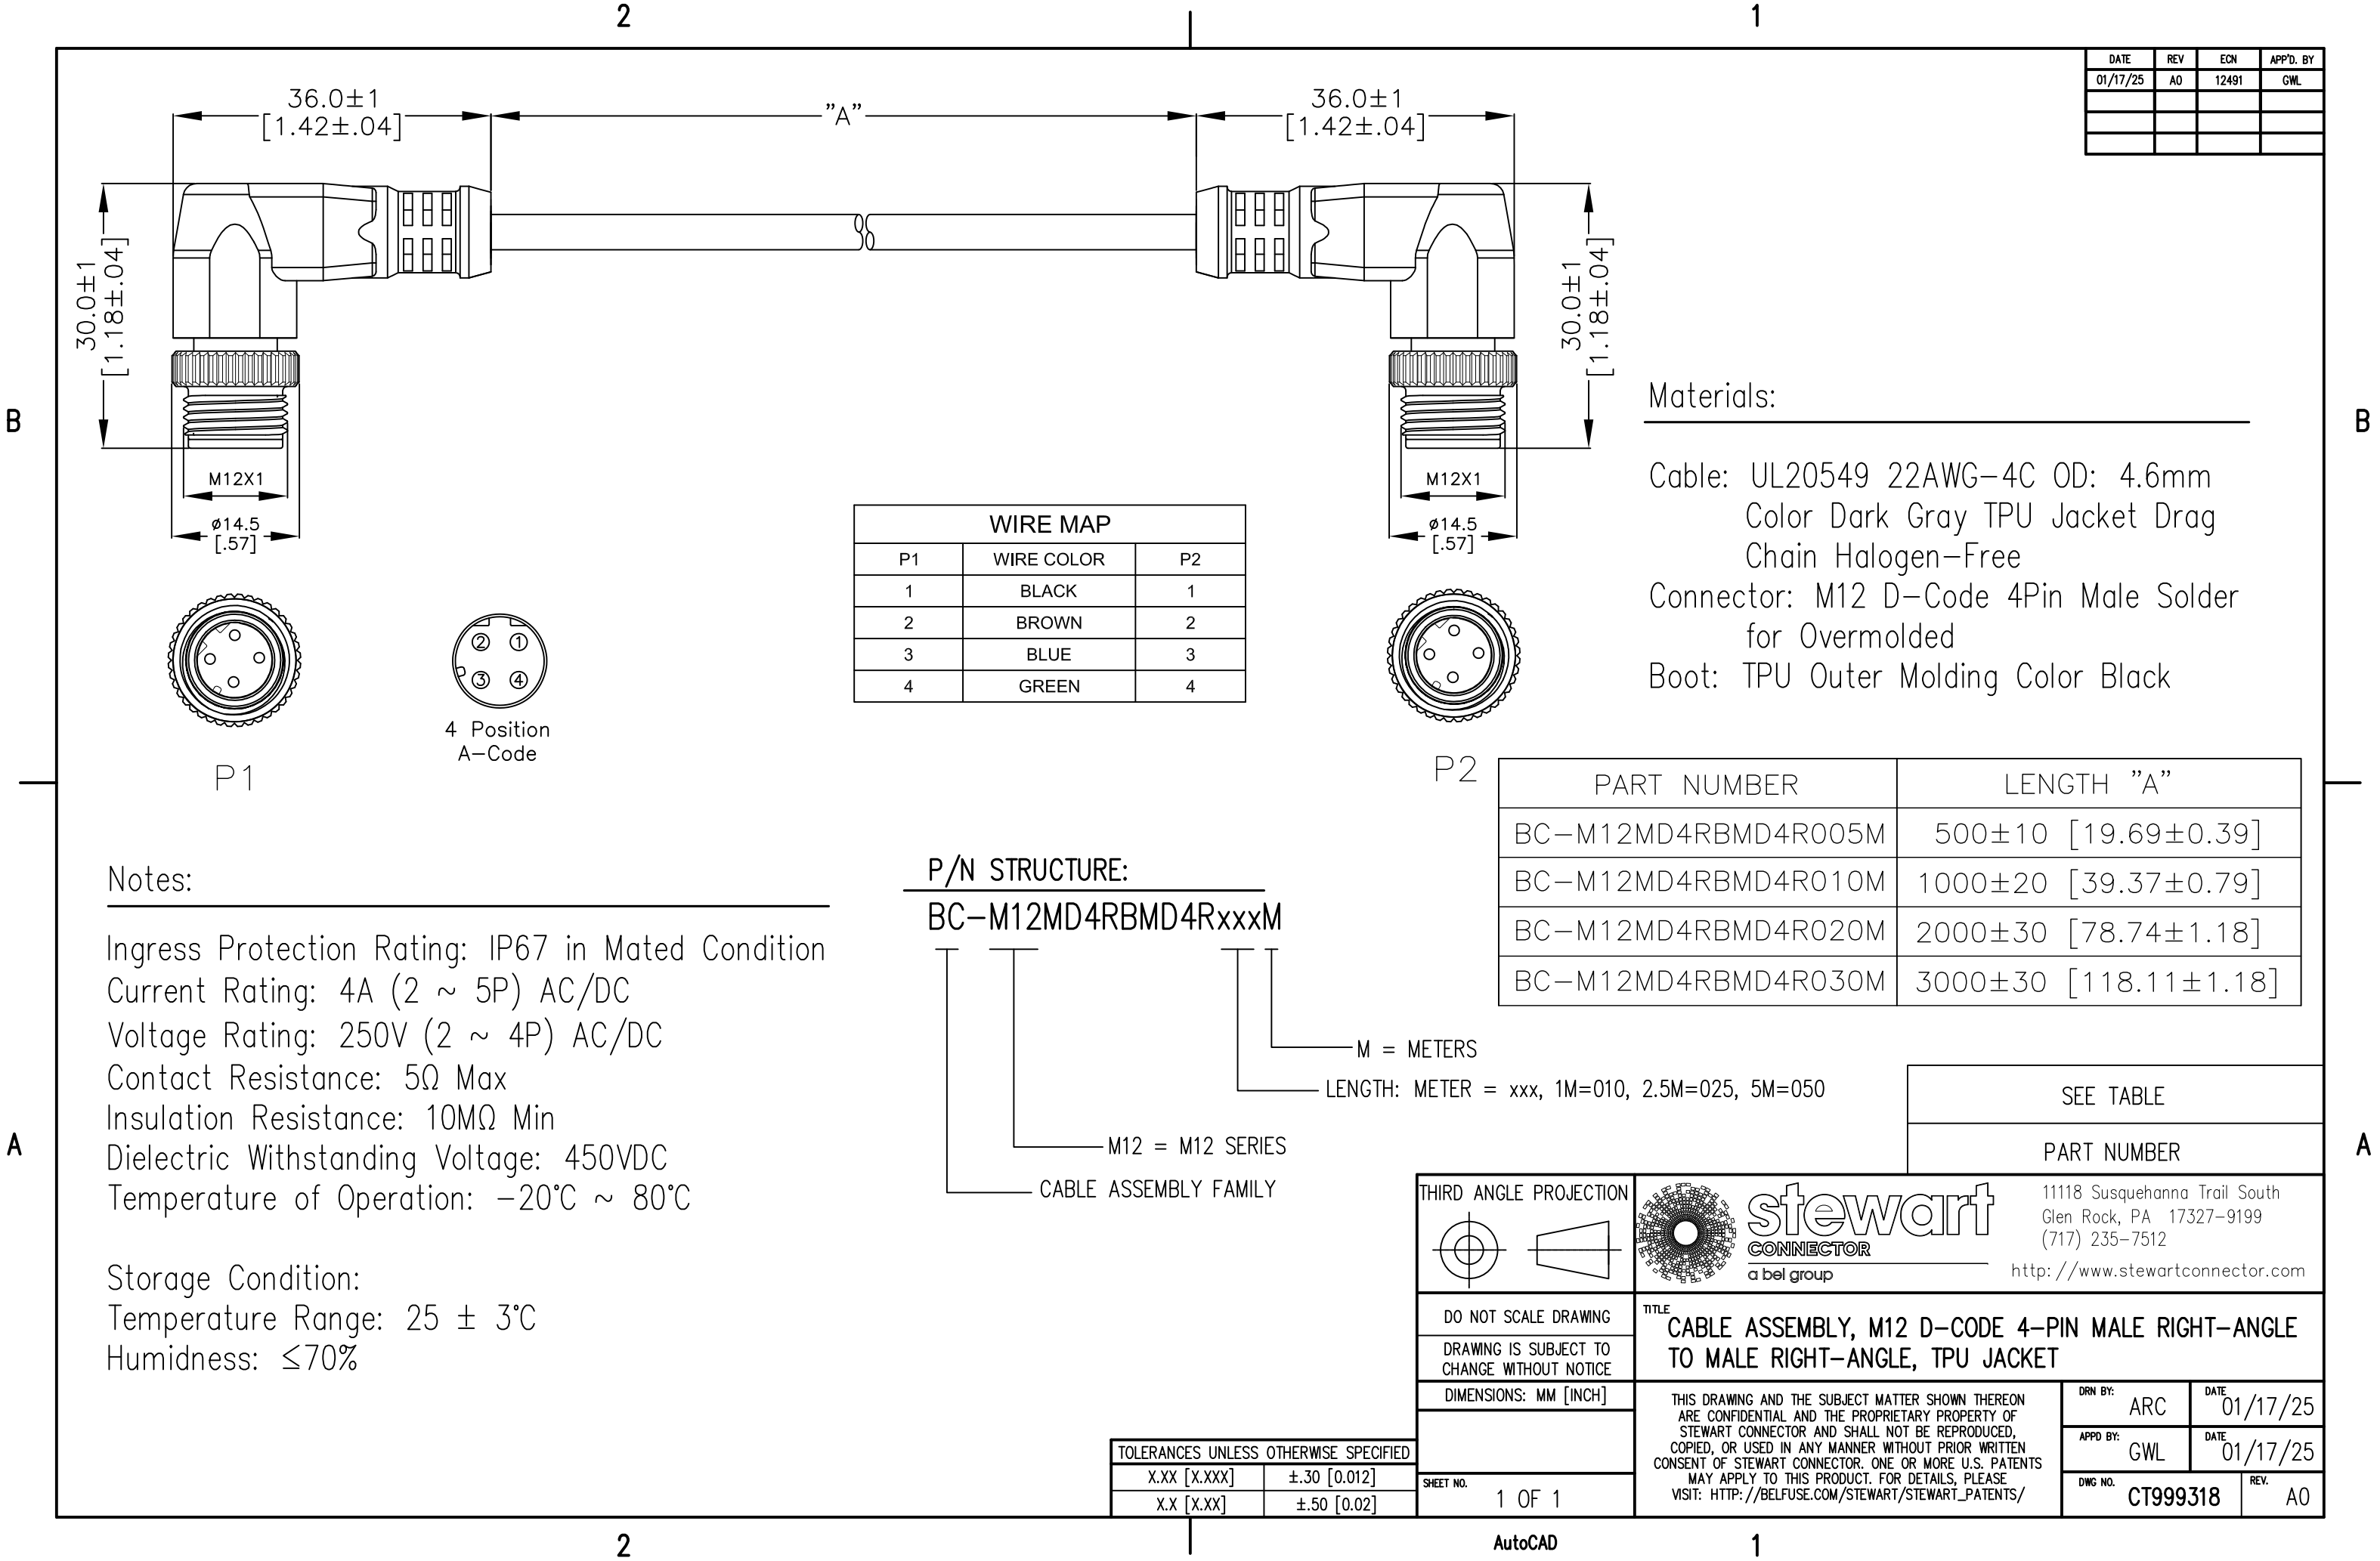

DATE	REV	ECN	APP'D. BY
01/17/25	A0	12491	GWL

Materials:

Cable: UL20549 22AWG-4C OD: 4.6mm
Color Dark Gray TPU Jacket Drag
Chain Halogen-Free
Connector: M12 D-Code 4Pin Male Solder
for Overmolded
Boot: TPU Outer Molding Color Black


PART NUMBER	LENGTH "A"
BC-M12MD4RBMD4R005M	500±10 [19.69±0.39]
BC-M12MD4RBMD4R010M	1000±20 [39.37±0.79]
BC-M12MD4RBMD4R020M	2000±30 [78.74±1.18]
BC-M12MD4RBMD4R030M	3000±30 [118.11±1.18]

Notes:

Ingress Protection Rating: IP67 in Mated Condition
Current Rating: 4A (2 ~ 5P) AC/DC
Voltage Rating: 250V (2 ~ 4P) AC/DC
Contact Resistance: 5Ω Max
Insulation Resistance: 10MΩ Min
Dielectric Withstanding Voltage: 450VDC
Temperature of Operation: -20°C ~ 80°C

Storage Condition:
Temperature Range: 25 ± 3°C
Humidness: ≤70%

P/N STRUCTURE:
BC-M12MD4RBMD4RxxxM

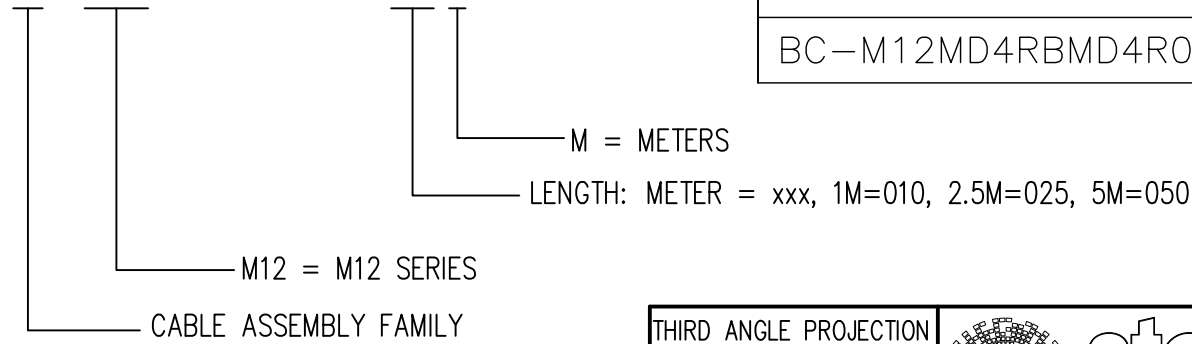

SEE TABLE
PART NUMBER

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO
CHANGE WITHOUT NOTICE
DIMENSIONS: MM [INCH]

1118 Susquehanna Trail South
Glen Rock, PA 17327-9199
(717) 235-7512
<http://www.stewartconnector.com>

TITLE
CABLE ASSEMBLY, M12 D-CODE 4-PIN MALE RIGHT-ANGLE
TO MALE RIGHT-ANGLE, TPU JACKET

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON
ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF
STEWART CONNECTOR AND SHALL NOT BE REPRODUCED,
COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN
CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS
MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE
VISIT: [HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/](http://BELFUSE.COM/STEWART/STEWART_PATENTS/)

DRW BY: ARC DATE 01/17/25
APPD BY: GWL DATE 01/17/25
DWG NO. CT999318 REV. A0

TOLERANCES UNLESS OTHERWISE SPECIFIED		
X.XX [X.XXX]	±.30 [0.012]	
X.X [X.XX]	±.50 [0.02]	

SHEET NO.
1 OF 1