


B

B

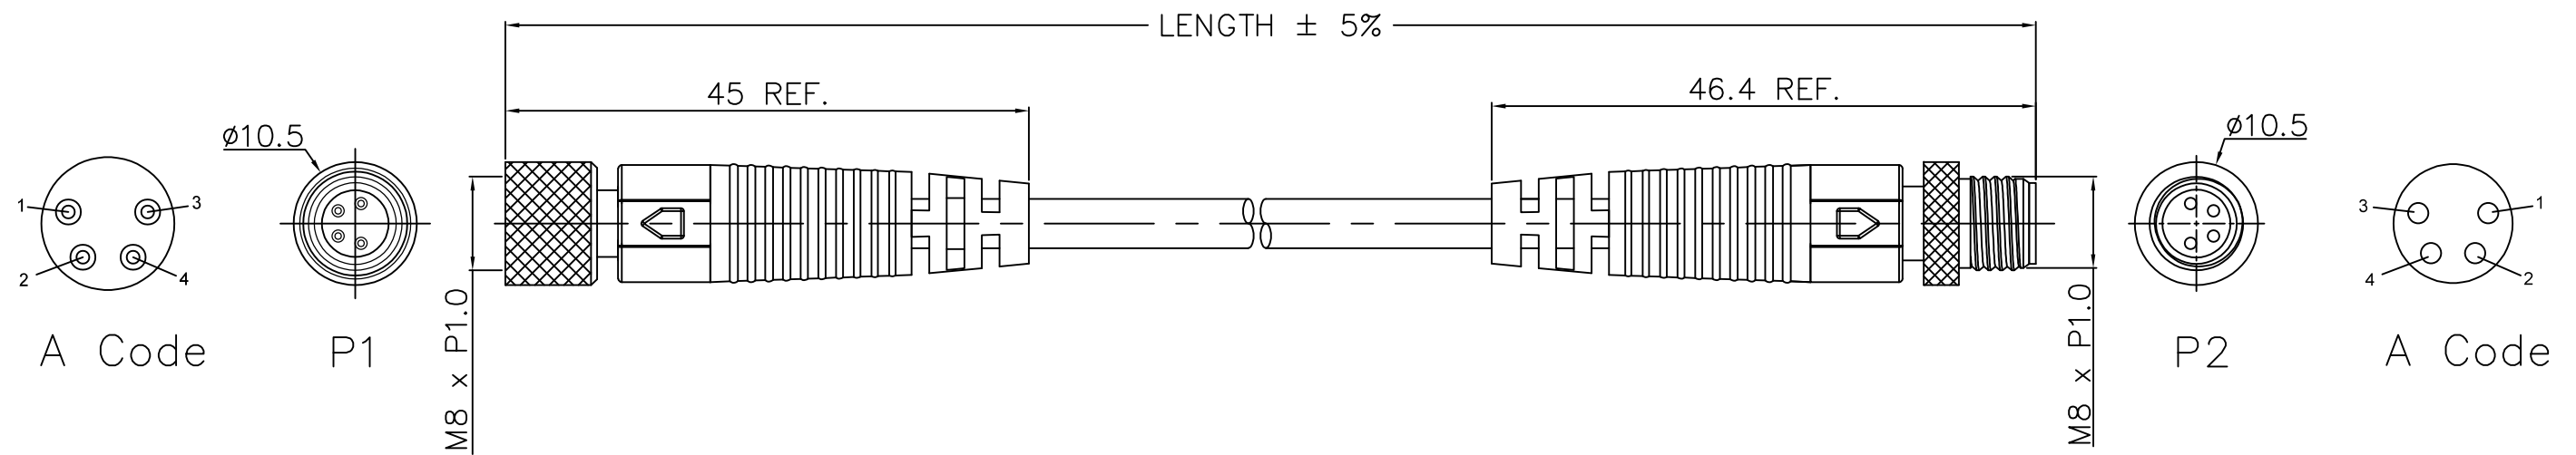

Notes:


Waterproof rate: IP68
Current rating: 3A
Rated voltage: 50V AC / 60V DC
Insulation Resistance: 1000 Megaohm min.

Materials:

Cable: UL2517 24AWG-4C Color Black
OD=4.2 PVC 105°C 300V
Plastic Housing: Engineering thermoplastic flammability rating UL 94V-0. Color Green
Contacts: Copper Alloy
Plating: Gold Plating over Nickel in contact
O-ring: EPDM rubber Color Red
Coupling nut: M8*P1 brass with nickel plated

P/N STRUCTURE:


BC-M8FA4AMA4xxxM

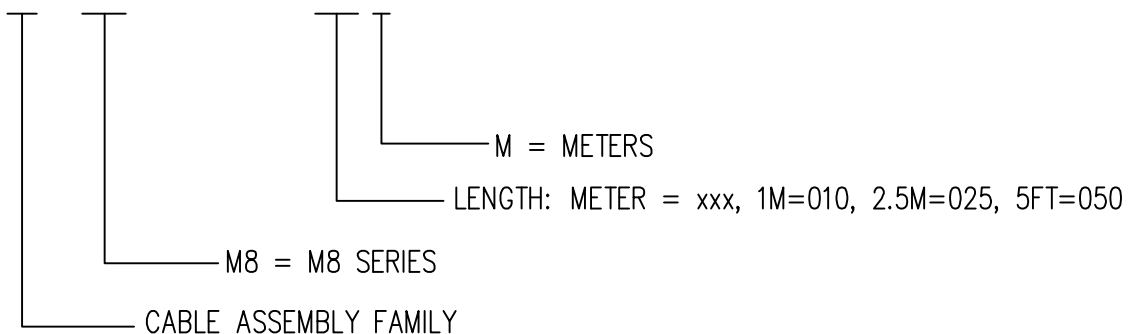

P1	WIRE COLOR	P2
1	BROWN	1
2	WHITE	2
3	BLUE	3
4	BLACK	4

BC-M8FA4AMA4xxxM


PART NUMBER



DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO
CHANGE WITHOUT NOTICE

DIMENSIONS: METRIC

SHEET NO.
1 OF 1



stewart
CONNECTOR
a bel group

11118 Susquehanna Trail South
Glen Rock, PA 17327-9199
(717) 235-7512
<http://www.stewartconnector.com>

TITLE
M8 FEMALE STRAIGHT TO M8 MALE STRAIGHT CORDSET

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE VISIT: [HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/](http://BELFUSE.COM/STEWART/STEWART_PATENTS/)

DRN BY: ARC	DATE 01/05/24
APPD BY: GWL	DATE 01/05/24
DWG NO. CT999299	REV. A0

A

A