
В

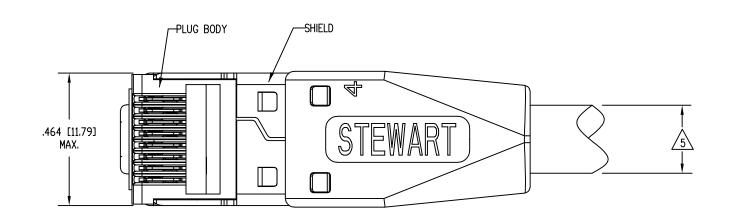

.040 [1.02] TYP. -CONTACTS (8) .040 [1.02] (.31 (.33 [7.9]) .264 [6.71] [8,4]) (4 PLCS) (4 PLCS) MAX. 好 .045 [1.14] .234 [5.94] - .124 [3.15] .109 [2.77] .240 [6.10] (1.42 [36.1])

NOTES:

1. PLUG KIT CONSISTS OF: PRE-INSERTED PLUG BODY WITH SHIELD LOAD BAR WIRE ALIGNER

2. MATERIALS:

PLUG BODY: CLEAR POLYCARBONATE, UL 94-VO BOOT: BLACK POLYCARBONATE, UL 94-VO WIRE ALIGNER AND LOAD BAR: CLEAR POLYCARBONATE, UL 94-VO CONTACTS: COPPER ALLOY, SELECTIVE GOLD PLATING SHIELD: COPPER ALLOY, NICKEL PLATE

- 3. FOR PRODUCT SPECIFICATION SEE PR026-01.
- 4. CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS BETWEEN .042 [1.07] TO .048 [1.22] OUTSIDE DIAMETER OF INSULATION.

5.\CABLES WITH OUTSIDE NOMINAL DIAMETERS OF.250 [6.35] TO .270 [6.86].


6. DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD FORMERLY FCC/CFR 47, PART 68.

7. CONTACT HEIGHT BEFORE TERMINATION. AFTER TERMINATION, THE CONTACT HEIGHT IS .237 [6.02] ±.005 [0.13].


8. PRODUCT DESIGNED FOR CATEGORY 6 AND 6A APPLICATIONS.

PLUG KIT CONSISTS OF 1 EACH SHIELDED PLUG BODY, LOAD BAR, WIRE ALIGNER, AND BOOT, PACKED IN ZIPPER BAG.

50 MICRO-INCHES [1.27um] SS-39200-112 BULK BAGGED 29 50 MICRO-INCHES [1.27um] SS-39200-111 CONTACT PLATING PART NUMBER PACKAGING IN MATING AREA



39200-925




WIRE ALIGNER

39100-864




LOAD BAR 39200-899



PRE-INSERTED PLUG BODY WITH SHIELD 39200-352





DO NOT SCALE DRAWING

DRAWING IS SUBJECT TO

CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC] UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE ±.005 [0.13]

ANGLES ARE ± 1°

1 OF

11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512

http://www.stewartconnector.com

8 CONDUCTOR, 8 POSITION SHIELDED PLUG, WITH LOAD BAR, AND WIRE ALIGNER, .048 MAX DIA WIRE, .270 MAX CABLE

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITH PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. THIS PRODUCT MAY BE PROTECTED BY ONE OR MORE OF THE FOLLOWING US PATEN' 5628647 6402559 6409535 6524128 7753717 8033863 OTHER PATENTS MAY BE PENDING.

TOR HOUT	DRN BY:		08		
11001 TS:	APPD BY:	GWL	DATE 09	-09	-22
	DWG NO.	CT390248		REV.	Α0

AutoCAD

Α