DATE	REV	ECN	APP'D. BY
9/2/22	A0	12037	JE
8/12/24	A1	12419	KAW

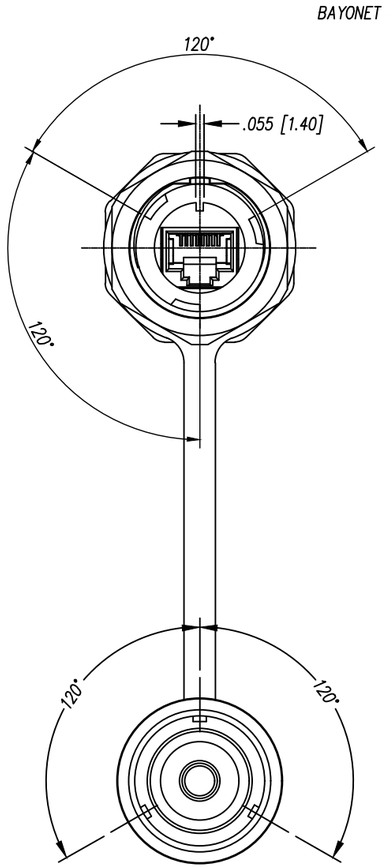

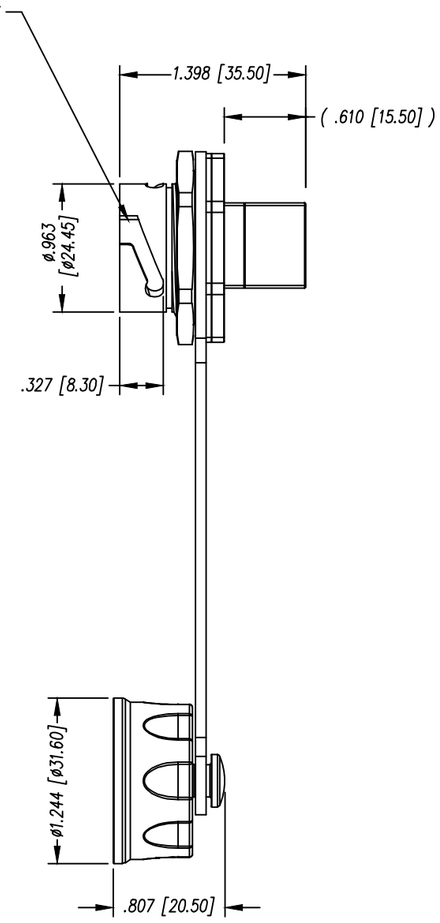

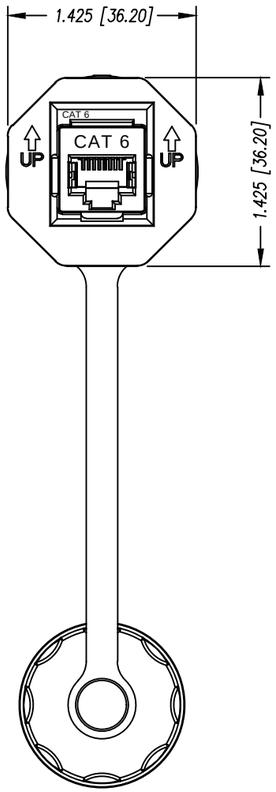



5 JAM NUT INSTALLATION ORIENTATION

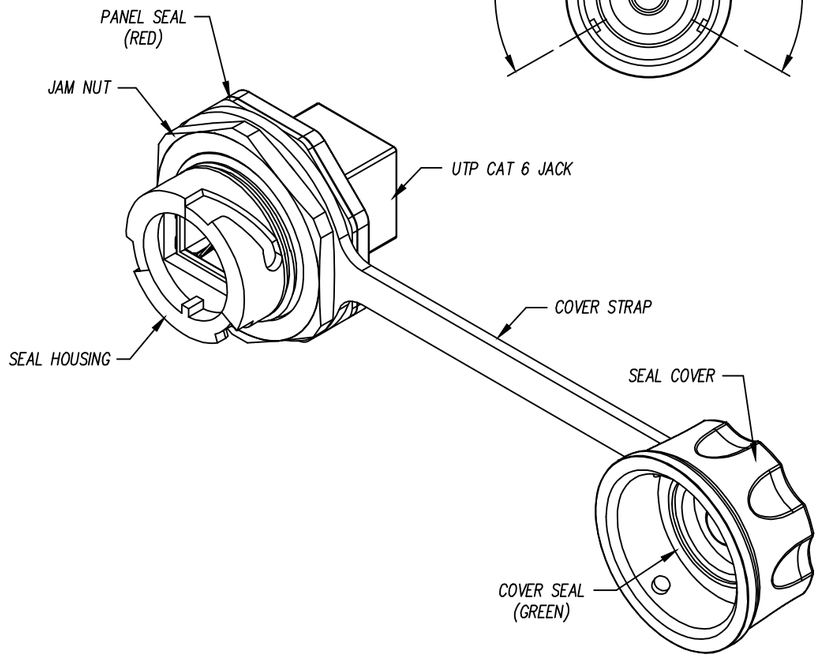

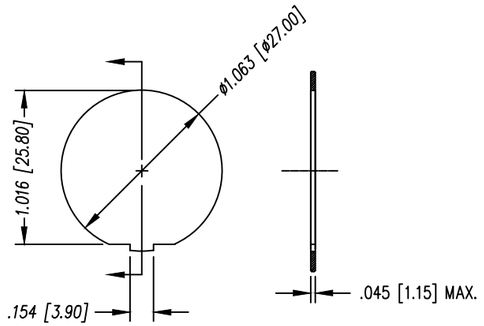

SUGGESTED PANEL OPENING

RoHS

NOTES:

1. CONNECTOR MATERIALS:
   HOUSING: THERMOPLASTIC UL94 V-0
   CONTACTS: COPPER ALLOY
   CONTACT PLATING: SELECTIVE GOLD IN THE CONTACT AREA
2. JACK DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD.
3. DESIGNED FOR CATEGORY 6 APPLICATIONS.
4. INTERNATIONAL PROTECTION CODE MEETS IP67.
5. FOR INSTALLATION, PLACE RED PANEL SEAL ON REAR SIDE OF PANEL. IF USING THE COVER STRAP, ENSURE STRAP OPENING IS ENCLOSED BY THE FLANGE OF THE NUT, AND NOT PINCHED. TIGHTEN NUT TO 26 TO 44 INCH-POUNDS [3 TO 5 NEWTON-METERS].
6. ELECTRICAL PROPERTIES:
   INSULATION RESISTANCE: 500MΩ MIN. @ 100VDC
   DIELECTRIC WITHSTANDING VOLTAGE: 1000VDC OR VAC @ 60Hz FOR 1 MIN.

50 MICRO-INCHES [1.27um]	SS-60400-032
CONTACT PLATING IN MATING AREA	PART NUMBER

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°

SHEET NO. 1 OF 1

stewart CONNECTOR a bel group

11118 Susquehanna Trail South
Glen Rock, PA 17327-9199
(717) 235-7512
http://www.stewartconnector.com

TITLE: INDUSTRIAL UNSHIELDED COUPLER JACK IP67 (UTP) CAT 6 WITH EXTERIOR JACK LATCH

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE VISIT: HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/

DRN BY:	JMM	DATE	9/2/22
APPD BY:	JE	DATE	9/2/22
DWG NO.	CT600263	REV.	A1

AutoCAD