

B


B

A


A

COMPONENTS		
5	SCREW, M3 x 10, SELF-TAP	2
4	CABLE TIE	2
3	CAP-2(BLACK)	1
2	CAP-1(WHITE)	1
1	HOUSING ASSEMBLY	1
ITEM	PART NAME	Q'TY

DATE	REV	ECN	APP'D. BY
10/15/20	A0	–	ADB
11/04/20	A1	11655	JE

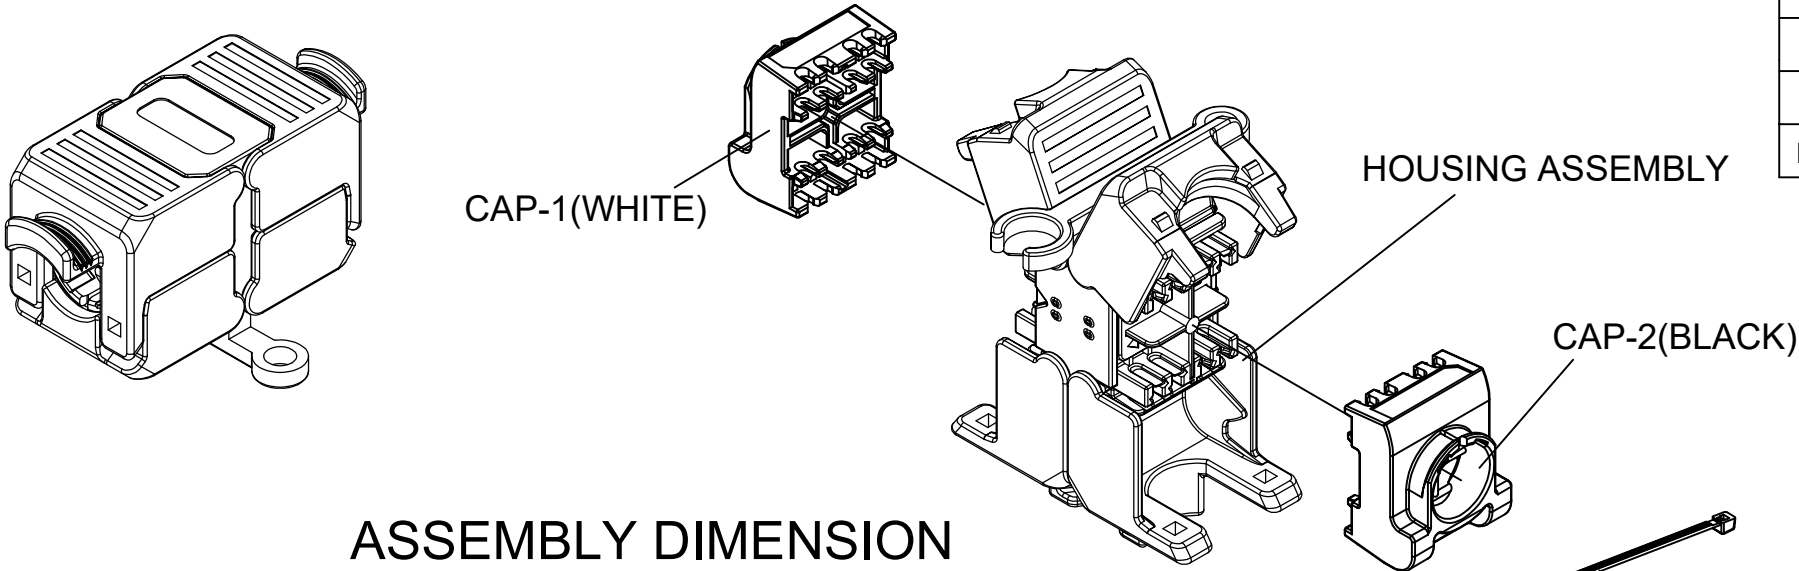

ASSEMBLY DIMENSION

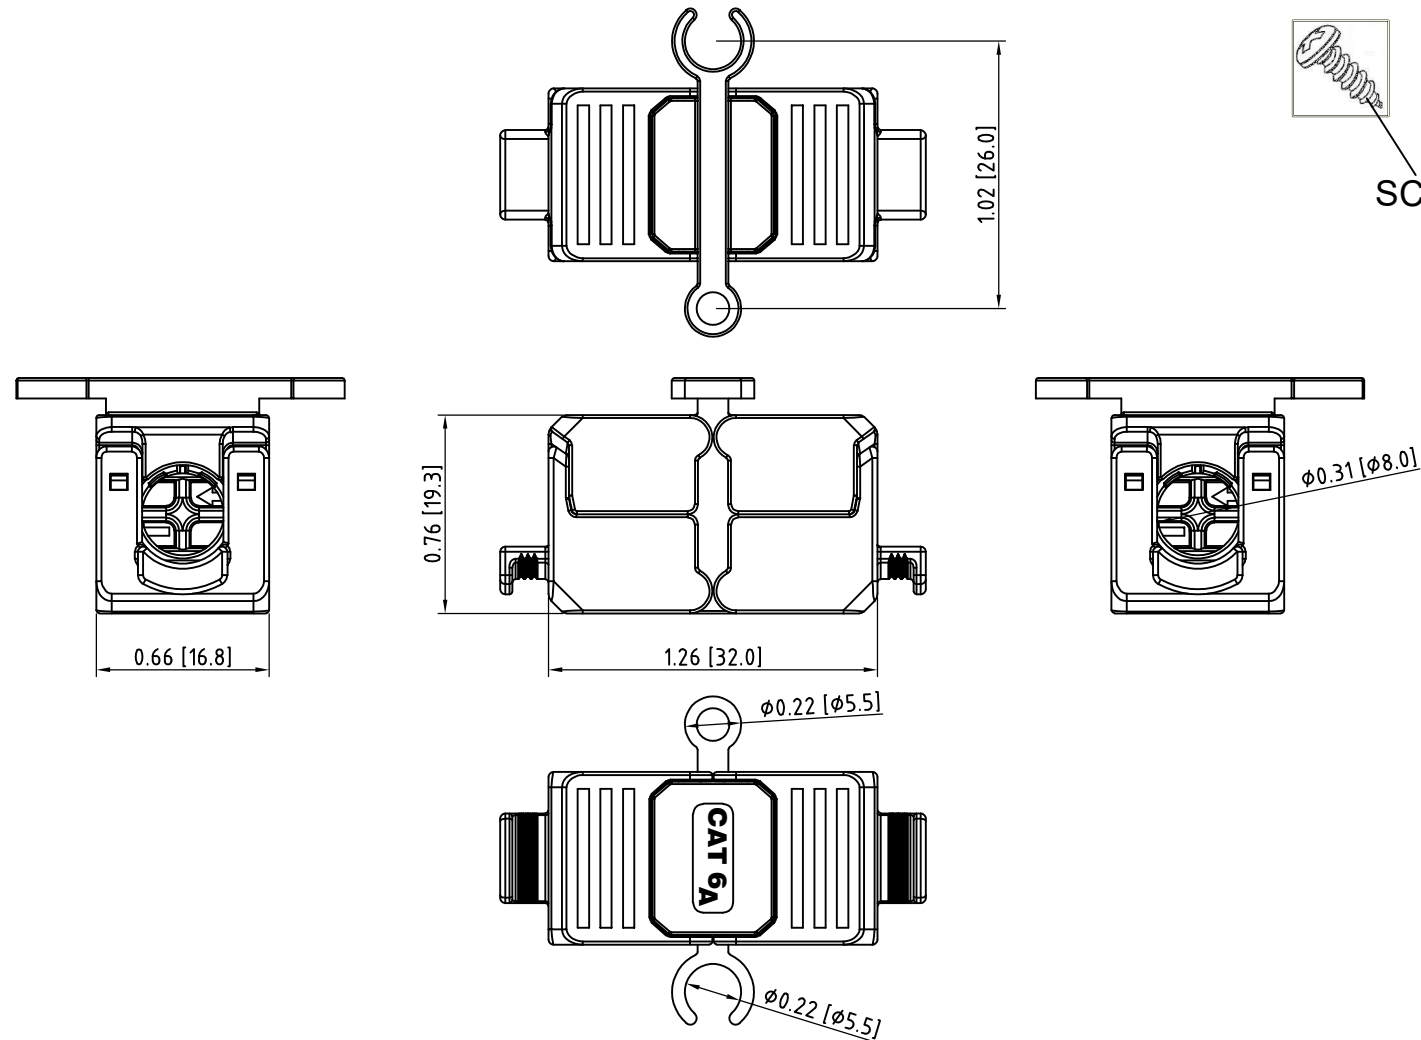

- NOTES:
- SUITABLE FOR USE IN EXISTING CABLE SYSTEMS UP TO CATEGORY 6A PERFORMANCE.
 - PHYSICAL
HOUSING: ZINC ALLOY, FULLY SHIELDED
IDC: PHOSPHOR BRONZE ALLOY WITH 100µIN TIN PLATING
 - ELECTRICAL
INSULATION RESISTANCE: 500MOHM MIN. @ 100VDC
DIELECTRIC WITHSTANDING VOLTAGE: IEC 60603-7
CONTACT TO CONTACT: 1000 VDC OR AC PEAK
CONTACT TO SHIELD: 1500 VDC OR AC PEAK
 - MECHANICAL
IDC WIRE GAUGE: 22 – 26 AWG, SOLID OR STRANDED
A SMALLER AWG CANNOT BE USED IN A PREVIOUSLY USED IDC.

SS-82120-002

PART NUMBER



THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE ±.005 [0.13]
ANGLES ARE ± 1°

SHEET NO. 1 OF 1



1118 Susquehanna Trail South
Glen Rock, PA 17327-9199
(717) 235-7512
<http://www.stewartconnector.com>

TITLE: CAT 6A TOOL-LESS CABLE SPLICER

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE VISIT: [HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/](http://BELFUSE.COM/STEWART/STEWART_PATENTS/)

DRN BY: JE
APPD BY: ADB
DWG NO. CT820036

DATE 09/28/20
DATE 10/15/20
REV. A1