DATE	REV	ECN	APP'D. BY
11-11-15	A5	10457	TRM
2-18-16	A6	10556	TRM



PLUG HOUSING

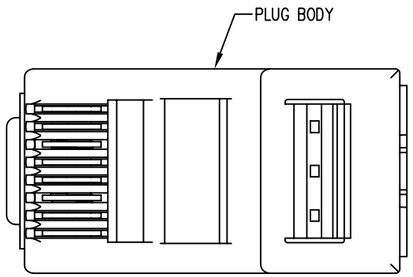



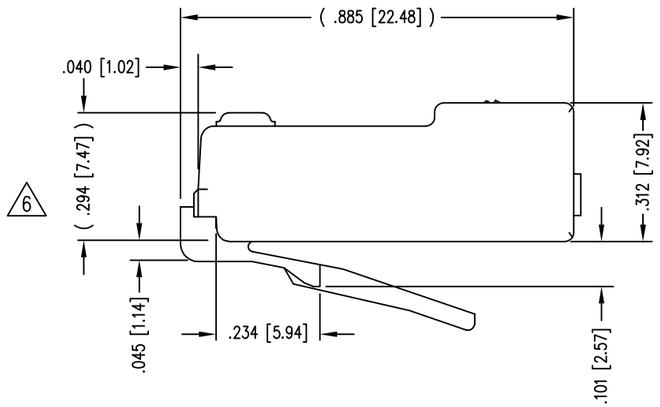

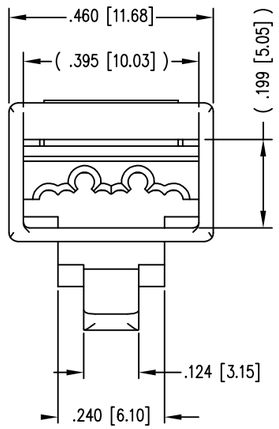

NOTES:

1- PLUG KIT CONSISTS OF :
   PRE-INSERTED PLUG BODY
   MANAGEMENT BAR
2- MATERIALS :
   FRONT HOUSING PLASTIC : CLEAR POLYCARBONATE, UL 94-V0
   MANAGEMENT BAR : POLYCARBONATE, UL 94-V0, COLOR: BLACK
   MANAGEMENT BAR COMPENSATOR: TIN PLATED BRASS
   CONTACTS : PHOSPHOR BRONZE, SELECTIVE GOLD PLATING
3- CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS BETWEEN .037 [0.94] TO .042 [1.07] OUTSIDE DIAMETER OF INSULATION.
4- PLUG SPECIFICATION: FOR CATEGORY 6 APPLICATIONS.
5- DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD.
6 TERMINATED PLUG HEIGHT: .237 [6.02] ±.005 [0.13]
7- FOR PRODUCT SPECIFICATION SEE PR026-01

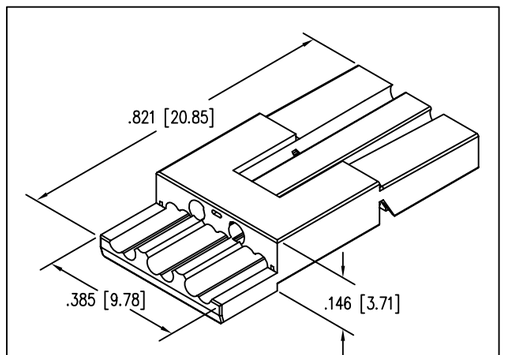

MANAGEMENT BAR

BAGS OF 25	50 MICRO-INCHES [1.27um]	SS-39100-005
BULK	50 MICRO-INCHES [1.27um]	SS-39100-002
PACKAGING	CONTACT PLATING IN MATING AREA	PART NUMBER

RoHS

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°

SHEET NO. 1 OF 1

stewart CONNECTOR a bel group
11118 Susquehanna Trail South
Glen Rock, PA 17327-9199
(717) 235-7512
http://www.stewartconnector.com

TITLE: 8 POSITION/8 CONDUCTOR STANDARD UNSHIELDED PLUG ASSEMBLY

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE VISIT: HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/

DRN BY:	JAF	DATE	1-6-00
APPD BY:	RGC	DATE	1-7-00
DWG NO.	CT390003	REV.	A6

AutoCAD

Please read our datasheet & drawing disclaimer here.