
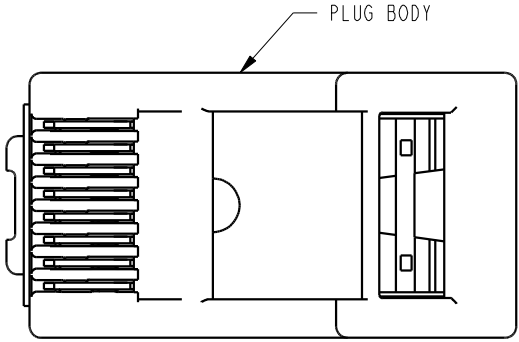





DATE	REV.	ECN	APP'D BY
2-12-16	A1	10543	TRM
2-19-16	A2	10557	TRM

B

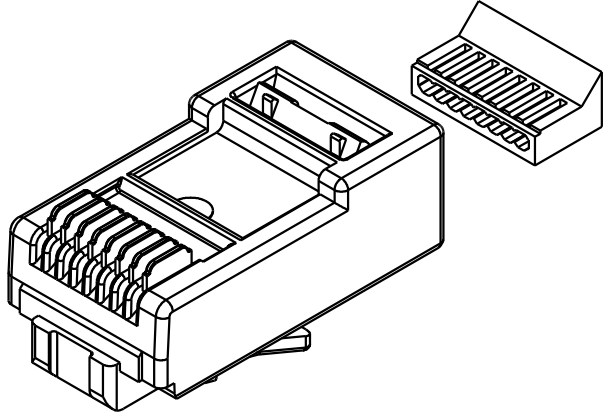


B

- NOTES:
- 1. COMPONENTS -
PRE-INSERTED PLUG BODY - 39100-308
PLUG BODY: CLEAR POLYCARBONATE, UL 94-V0
CONTACTS: COPPER ALLOY, SELECTIVE GOLD PLATING OR EQUIVALENT
LOAD BAR: POLYCARBONATE, UL 94-V0. COLOR: BLACK
 - 2. CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS BETWEEN .037 [0.94] TO .042 [1.07] OUTSIDE DIAMETER OF INSULATION.
 - 3. FOR PRODUCT SPECIFICATION SEE PR026-01
 - 4. DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD.
 - 5. TERMINATED PLUG HEIGHT: .237 [6.02] ±.005 [0.13].
 - 6. DESIGNED FOR CATEGORY 5/5e APPLICATIONS.

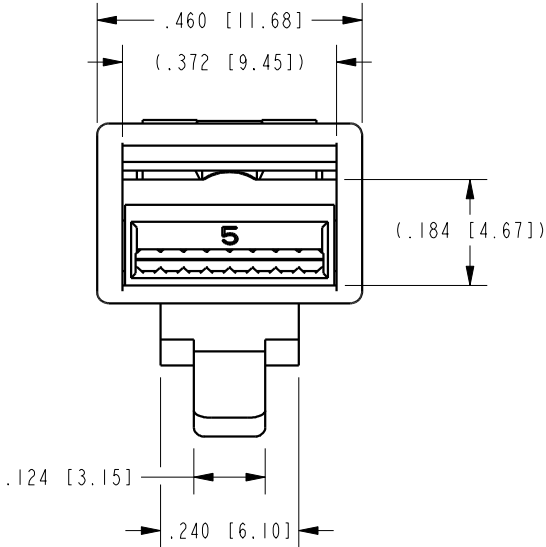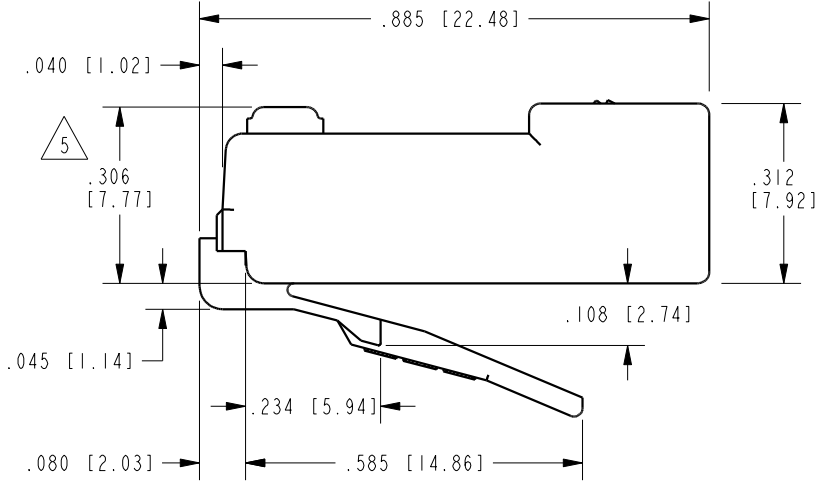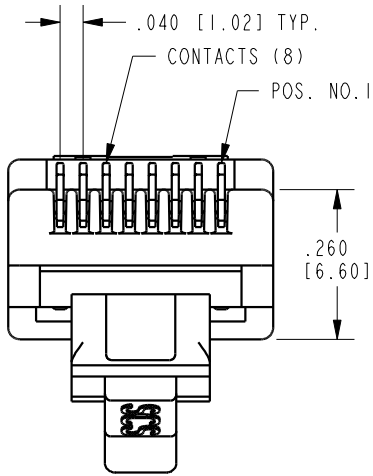

A

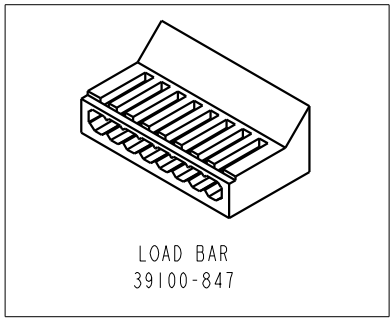

RoHS



A

50 MICRO-INCHES [1.27um]	SS-39100-048
CONTACT PLATING IN MATING AREA	PART NUMBER

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO
CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE ±.005 [0.13]
ANGLES ARE ±1°

SHEET NO.
1 OF 1

11118 Susquehanna Trail South
Glen Rock, PA 17327-9199
(717) 235-7512
<http://www.stewartconnector.com>

8 POSITION/8 CONDUCTOR CAT5/5e PLUG
WITH LOAD BAR, UNSHIELDED

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON
ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF
STEWART CONNECTOR AND SHALL NOT BE REPRODUCED,
COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN
CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS
MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE
VISIT: [HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/](http://BELFUSE.COM/STEWART/STEWART_PATENTS/)

DRN BY: TRM
DATE: 2-11-16

APPD BY: DHG
DATE: 2-11-16

DWG. NO. CT390157
REV. A2