

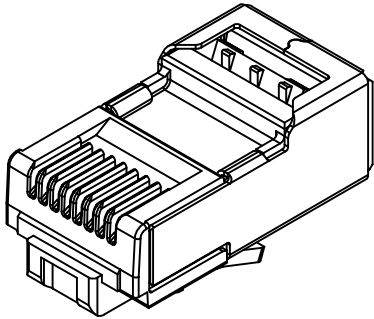
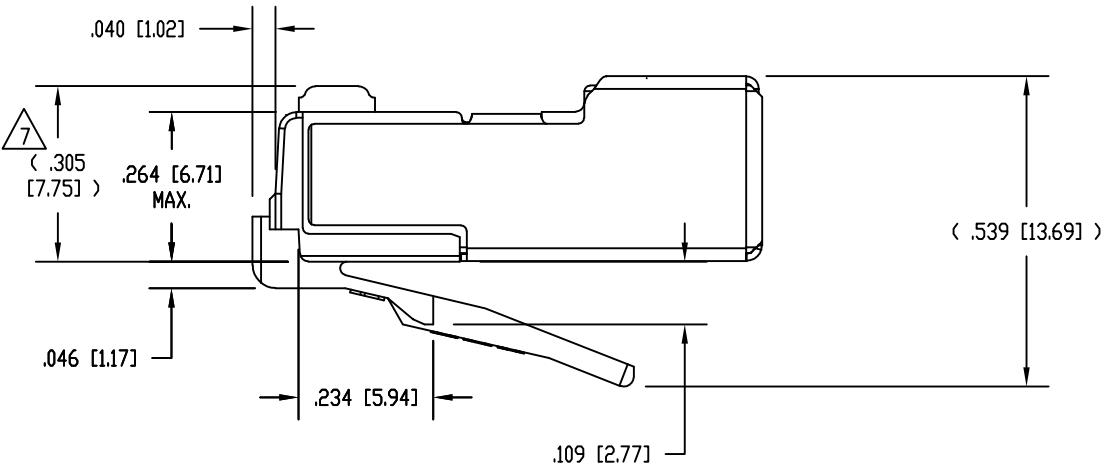



DATE	REV	ECN	APP'D. BY
12-12-16	B3	10840	TRM
1-4-18	B4	11185	TRM

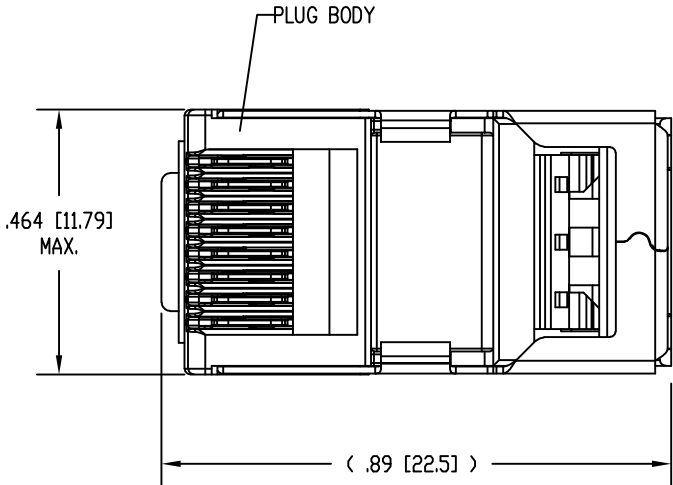


ISOMETRIC VIEW OF TERMINATED PLUG

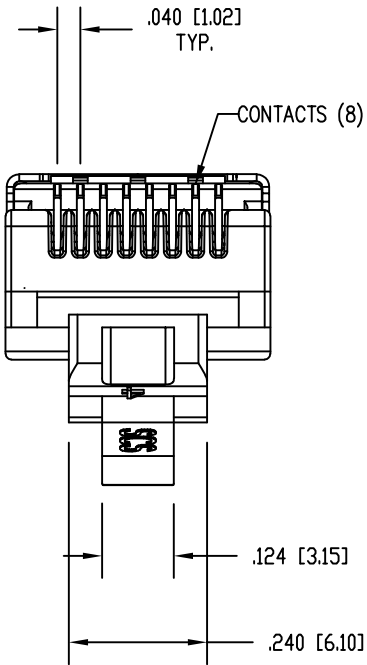


- NOTES:
- 1. PLUG KIT CONSISTS OF:
PRE-INSERTED PLUG BODY WITH SHIELD
LOAD BAR
WIRE ALIGNER
 - 2. MATERIALS:
PLUG BODY: CLEAR POLYCARBONATE, UL 94-V0
LOAD BAR: BLACK POLYCARBONATE, UL 94-V0
WIRE ALIGNER: CLEAR POLYCARBONATE, UL 94-V0
CONTACTS: COPPER ALLOY, SELECTIVE GOLD PLATING
SHIELD: COPPER ALLOY, NICKEL PLATE
 - 3. FOR PRODUCT SPECIFICATION SEE PR026-01.
 - 4. CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS BETWEEN .037 [0.94] TO .042 [1.07] OUTSIDE DIAMETER OF INSULATION.
 - 5. PRODUCT DESIGNED FOR CATEGORY 6A APPLICATIONS.
 - 6. DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD FORMERLY FCC/CFR 47, PART 68.
- 7 TERMINATED PLUG HEIGHT: .237 [6.02] ±.005 [0.13].



PRE-INSERTED
PLUG BODY
39200-339



WIRE ALIGNER
39100-864



LOAD BAR
39100-847



50 MICRO-INCHES [0.76um]	SS-39200-037
CONTACT PLATING IN MATING AREA	PART NUMBER

THIRD ANGLE PROJECTION				11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512 http://www.stewartconnector.com	
DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE		TITLE: 8 CONDUCTOR, 8 POSITION SHIELDED CAT 6A PLUG, WITH LOAD BAR, AND WIRE ALIGNER			
DIMENSIONS: INCHES [METRIC]		THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE VISIT: HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/		DRN BY:	DATE
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°				DHG	9-30-13
SHEET NO. 1 OF 1		APPD BY:		TRM	DATE 9-30-13
		DWG NO.		CT390111	REV. B4