



DATE	REV	ECN	APP'D. BY
4-17-15	A0	-	TRM
2-22-16	A1	10555	TRM


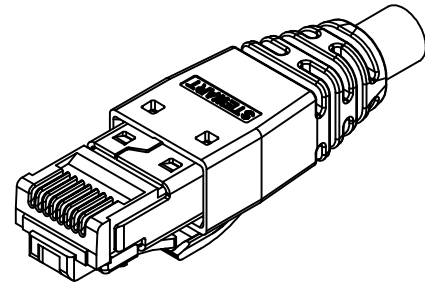


ISOMETRIC VIEW OF TERMINATED PLUG

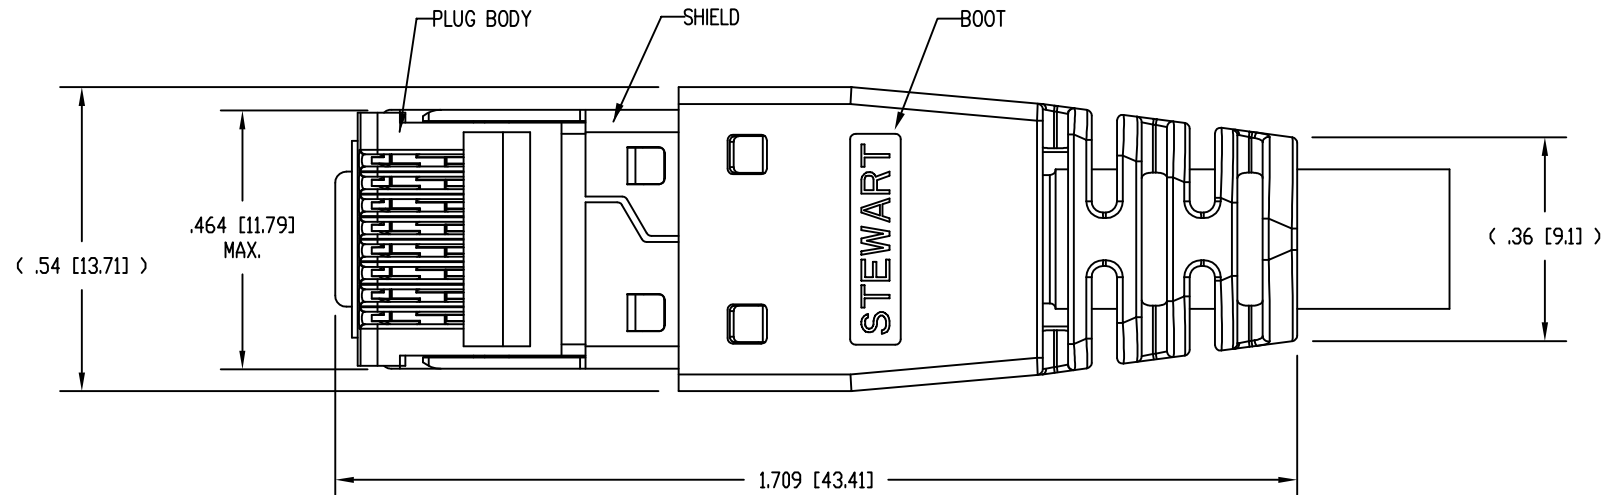

NOTES:

1. PLUG KIT CONSISTS OF:
PRE-INSERTED PLUG BODY - 39200-320
LOAD BAR - 39200-899
BOOT - 39200-838
WIRE ALIGNER - 39100-864
SHIELD - 39200-509
2. MATERIALS:
PLUG BODY: CLEAR POLYCARBONATE, UL 94-V0
BOOT : BLACK POLYCARBONATE, UL 94-V0
WIRE ALIGNER AND LOAD BAR: CLEAR POLYCARBONATE, UL 94-V0
CONTACTS: COPPER ALLOY, SELECTIVE GOLD PLATING
SHIELD: COPPER ALLOY, NICKEL PLATE
3. FOR PRODUCT SPECIFICATION SEE PR026-01.
4. CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS BETWEEN .042 [1.07] TO .048 [1.22] OUTSIDE DIAMETER OF INSULATION.
5. CRIMP IS FOR CABLES WITH OUTSIDE NOMINAL DIAMETERS OF .232 [5.90] TO .248 [6.30].
6. INDIVIDUALLY BAGGED PLUG KITS (1 EACH PLUG BODY, LOAD BAR, WIRE ALIGNER, AND BOOT) PACKAGED 25 PER BOX.
7. DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD FORMERLY FCC/CFR 47, PART 68.
8. CONTACT HEIGHT BEFORE TERMINATION.
AFTER TERMINATION, THE CONTACT HEIGHT IS .237 [6.02] ±.005 [0.13].
9. PRODUCT DESIGNED FOR CATEGORY 6 AND 6A APPLICATIONS.

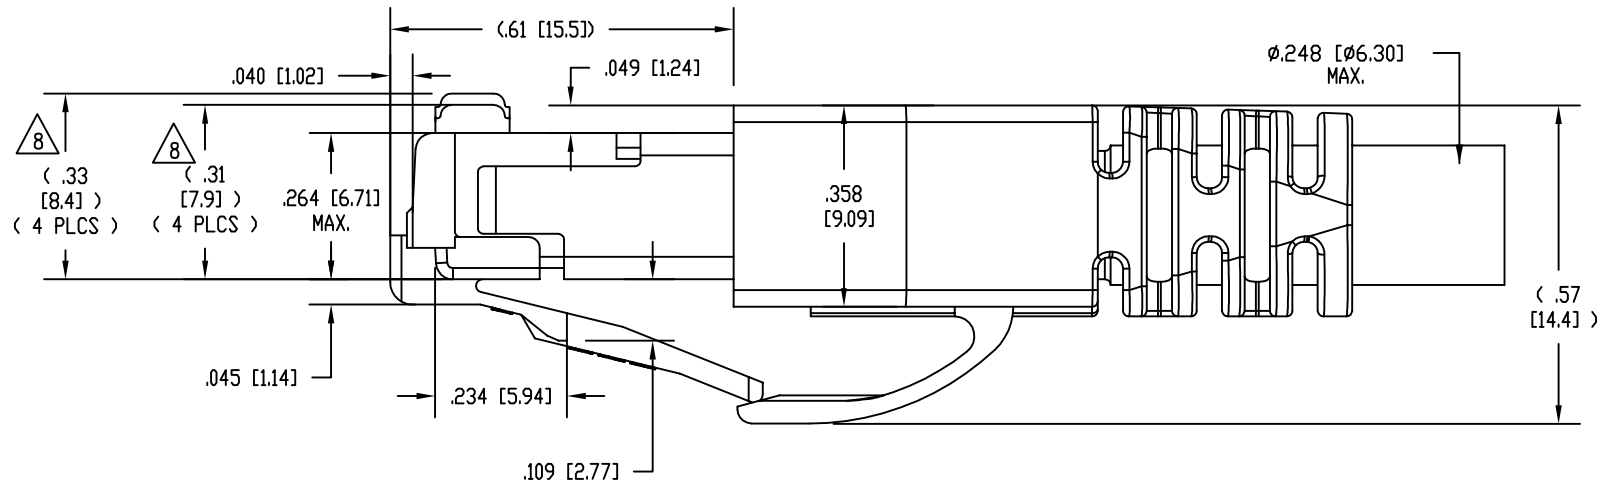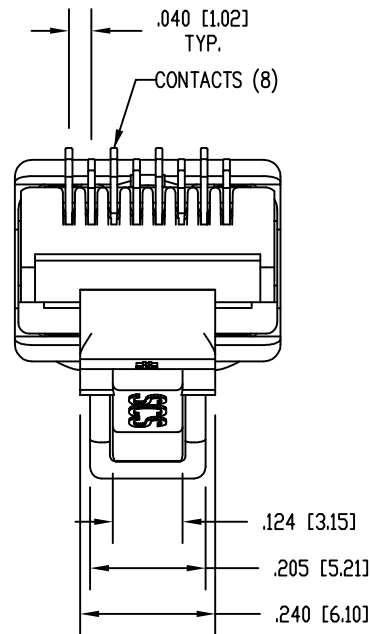


B

B


A

A


BAGGED	50 MICRO-INCHES [0.76um]	SS-39200-043
PACKAGING	CONTACT PLATING IN MATING AREA	PART NUMBER




WIRE ALIGNER
39100-864



LOAD BAR
39200-899

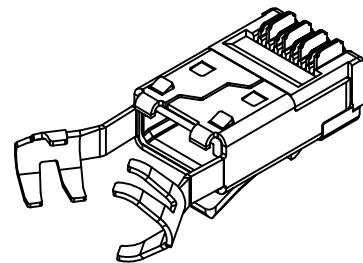

PRE-INSERTED PLUG
BODY 39200-320
WITH SHIELD
39200-509



BOOT
39200-838

RoHS



THIRD ANGLE PROJECTION 	 11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512 http://www.stewartconnector.com
DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE	TITLE: 8 CONDUCTOR, 8 POSITION SHIELDED PLUG, WITH BOOT, LOAD BAR, AND WIRE ALIGNER, .248 MAX CABLE
DIMENSIONS: INCHES [METRIC]	THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE VISIT: HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°	DRN BY: SMN DATE 4-17-15
SHEET NO. 1 OF 1	APPD BY: TRM DATE 4-17-15
	DWG NO. CT390128 REV. A1