

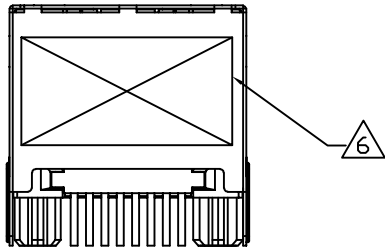
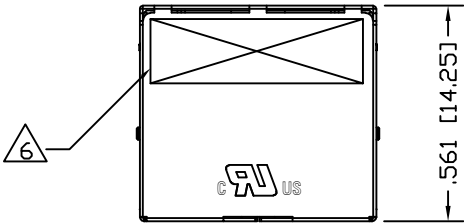

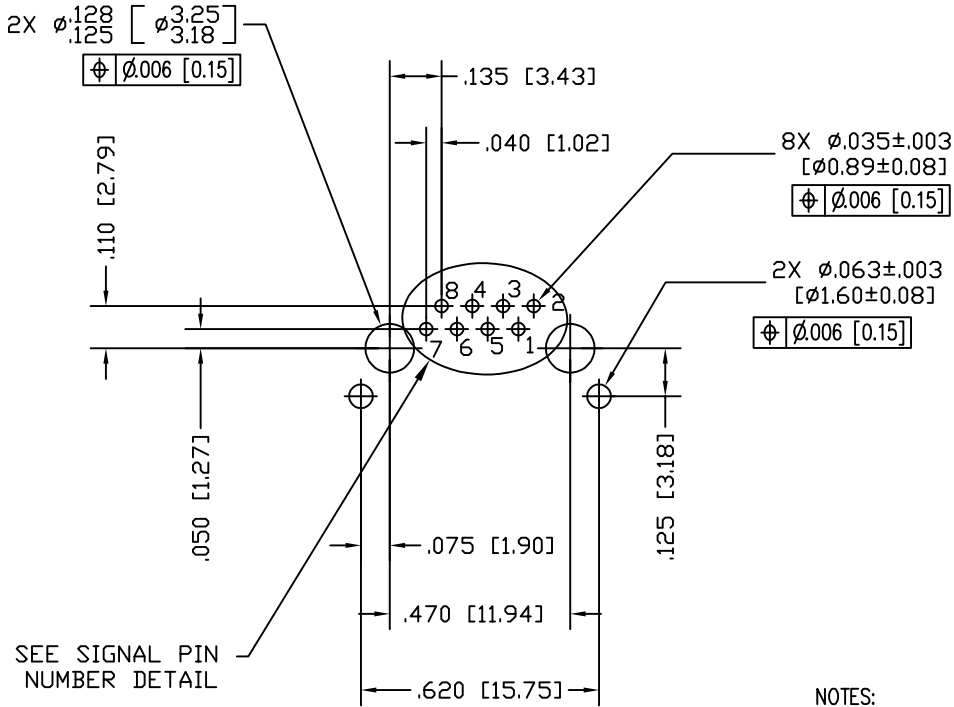


DATE	REV	ECN	APP'D. BY
2-10-16	A1	10535	TRM
9-22-16	A2	10762	TRM
6-08-17	A3	11021	DHG

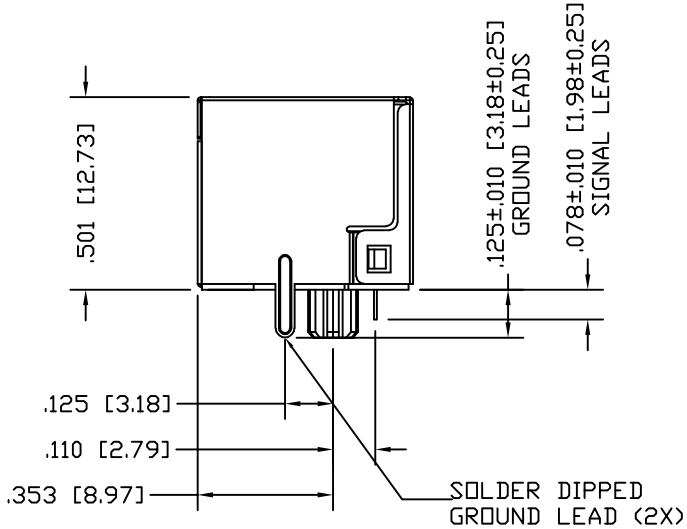

BACK VIEW

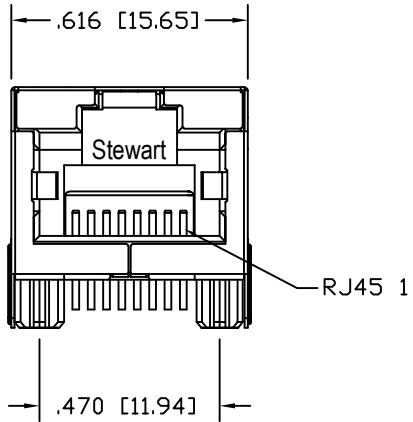

SIGNAL PIN NUMBER DETAIL

- NOTES:
- CONNECTOR MATERIALS:
HOUSING: THERMOPLASTIC UL94 V-0
CONTACTS/SHIELD: COPPER ALLOY
SHIELD PLATING: NICKEL OR TIN
CONTACT PLATING: SELECTIVE GOLD IN CONTACT AREA
SEE CHART FOR PART NUMBER
 - DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD.
 - DIELECTRIC WITHSTANDING VOLTAGE (CONTACT TO SHIELD) : 1500VDC
 - HIGH TEMPERATURE PLASTIC; IR REFLOW SOLDER COMPATIBLE.
CAN WITHSTAND 260°C FOR 10 SEC. MAX.
 - FOR PRODUCT SPECIFICATION SEE PRO26-01
 - LOGO, PART NUMBER AND DATE CODE LOCATED APROX. IN THIS AREA.
 - FOR PROPER JACK FUNCTION AND PERFORMANCE,
TIA-1096 COMPLIANT PLUGS MUST BE USED.

50 MICRO-INCHES [1.27um]	SS-60300-068
CONTACT PLATING IN MATING AREA	PART NUMBER



THIRD ANGLE PROJECTION		11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512 http://www.stewartconnector.com
DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE	TITLE: 10 GIGABIT, HORIZONTAL SHIELDED JACK, SHORT TAILS	
DIMENSIONS: INCHES [METRIC]	THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE VISIT: HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°	DRN BY: SAW	DATE 9-26-13
SHEET NO. 1 OF 1	APPD BY: DHG	DATE 9-27-13
	DWG NO. CT600138	REV. A3