

B

B

PACKAGING AND HANDLING DETAILS:

AT THE FACTORY FOR SHIPMENT:

- 1. SINGLE TRAY OF PARTS IS PLACED IN BAG ALONG WITH HUMIDITY INDICATING CARD (0200A0114-02) AND 2 EA DESICCANT (0036M0010-01) AND VACUUM SEALED.


PARTS NEED TO CONFORM TO THE HANDLING REQUIREMENTS OF MSL 3 PER THE J-STD-033 STANDARD.

A

A

HUMIDITY INDICATING CARD
0200A0114-02



VACUUM SEALED BAG
0200M0143-01

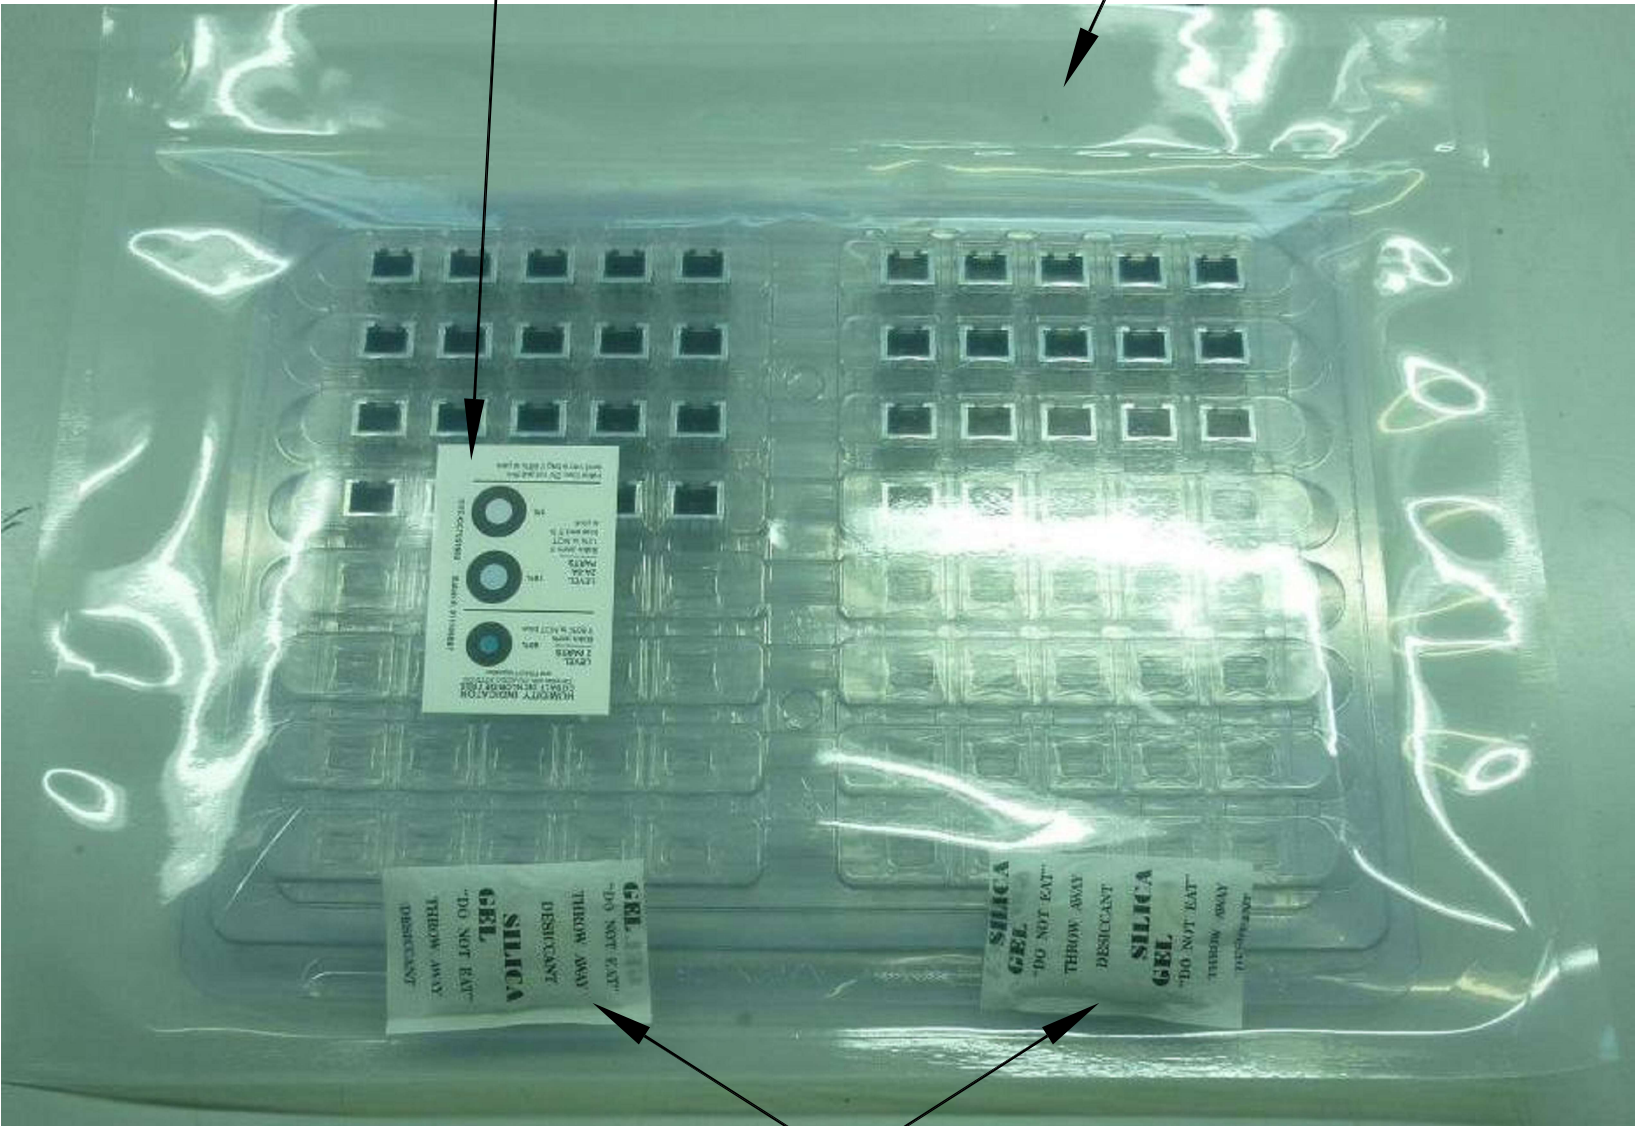

DESICCANT
0036M0010-01

RoHS



THIRD ANGLE PROJECTION 		 stewart CONNECTOR a bel group		11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512 http://www.stewartconnector.com	
DO NOT SCALE DRAWING		TITLE: 8 CONTACT, 8 POSITION, SHIELDED CAT 5/5e JACK EMI-RFI ONE PIECE SHIELDED, ESD GROUNDED			
DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE					
DIMENSIONS: INCHES [METRIC]		THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE VISIT: HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/		DRN BY: TRM	DATE 9-28-07
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE $\pm .005$ [0.13] ANGLES ARE $\pm 1^\circ$				APPD BY: DHG	DATE 9-28-07
SHEET NO. 2 OF 2		DWG NO. CT710128F		REV. D0	