
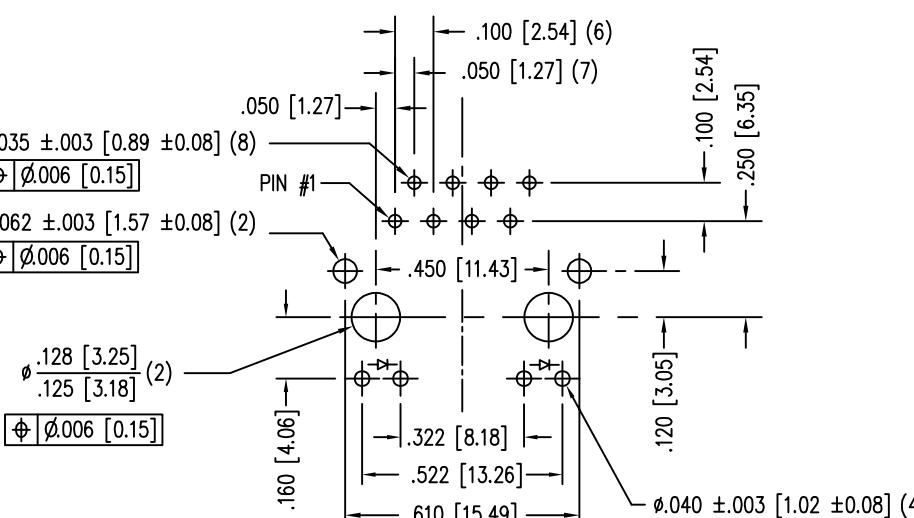
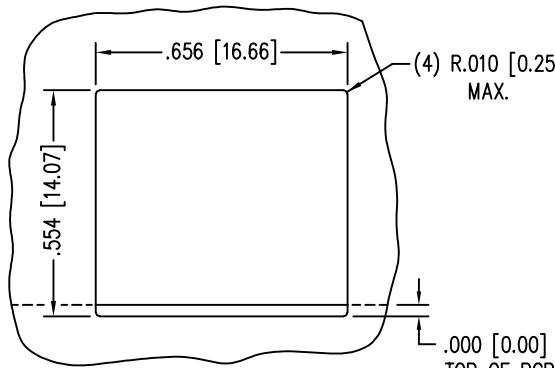
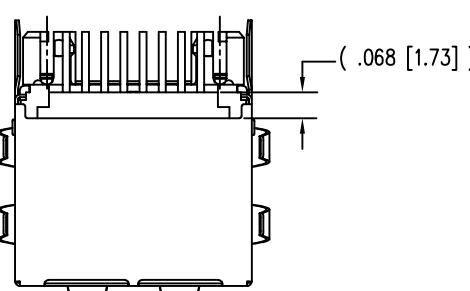
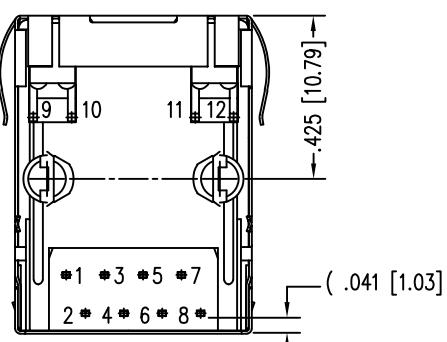
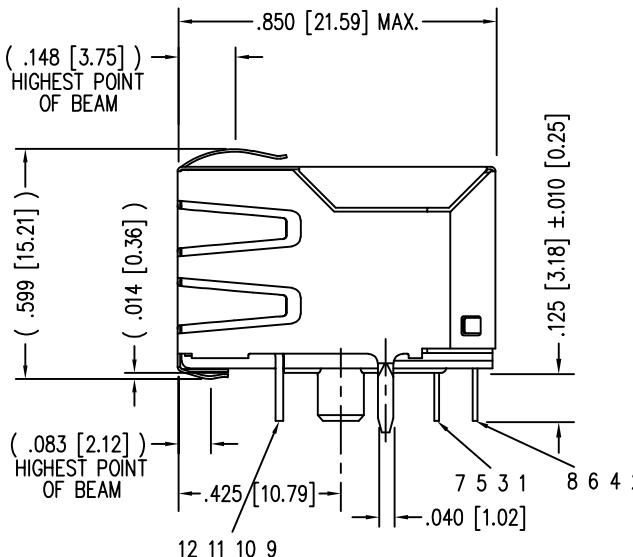


DATE	REV	ECN	APP'D. BY
2-05-18	B3	11192	DHG
2-26-18	B4	11202	TRM
7-11-23	C0	12208	JE

B

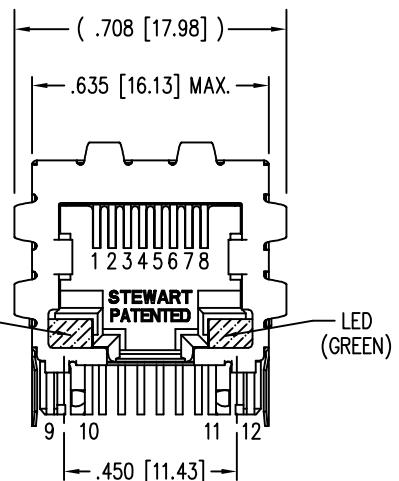

P.C.B. RECOMMENDED HOLE LAYOUT  
SEEN FROM COMPONENT SIDE


ALL CENTERLINE DIMENSIONS ARE BASIC.



#### NOTES:


1. CONNECTOR MATERIALS:  
HOUSING: THERMOPLASTIC UL94 V-0  
CONTACTS/SHIELD: COPPER ALLOY  
SHIELD PLATING: NICKEL OR TIN  
CONTACT PLATING: SELECTIVE GOLD IN CONTACT AREA  
SEE CHART FOR PART NUMBER
2. FOR PRODUCT SPECIFICATION SEE PR022-01
3. RATED AT MAX. 260°C FOR MAX. 10 SECS.
4. DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD.
5. THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE  
USER THE ABILITY TO HAVE REASONABLE JACK/PANEL  
CLEARANCES, YET MAINTAIN GROUNDING CAPABILITY.  
THESE VARIABLES CAN BE ADJUSTED IN EITHER DIRECTION  
BUT MAY CARRY SOME CONSEQUENCES IN THE FORM OF  
LOWER MATING FORCES OR TIGHTER ASSEMBLY TOLERANCES.

#### LED POLARITY (ENLARGED VIEW)



SINGLE COLOR LED

30 MICRO-INCHES [0.76um]	SS74800-087F	PACKAGED ON TAPE & REEL
30 MICRO-INCHES [0.76um]	SS74800-038F	
CONTACT PLATING IN MATING AREA	PART NUMBER	



DO NOT SCALE DRAWING  
DRAWING IS SUBJECT TO  
CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED  
TOLERANCES ARE ± .005 [0.13]  
ANGLES ARE ± 1°

SHEET NO. 1 OF 2



11118 Susquehanna Trail South  
Glen Rock, PA 17327-9199  
(717) 235-7512

<http://www.stewartconnector.com>



TITLE: EIGHT CONTACT, EIGHT POSITION EMI-RFI ONE PIECE SHIELDED  
ESD GROUNDED SINGLE PORT LED JACK

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON  
ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF  
STEWART CONNECTOR AND SHALL NOT BE REPRODUCED,  
COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN  
CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS  
MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE  
VISIT: [HTTP://BELFUSE.COM/STEWART/STEWART\\_PATENTS/](http://BELFUSE.COM/STEWART/STEWART_PATENTS/)

DRN BY: SHE DATE 6-4-05

APPD BY: DANNY DATE 6-4-05

DWG NO. CT740020F REV. C0

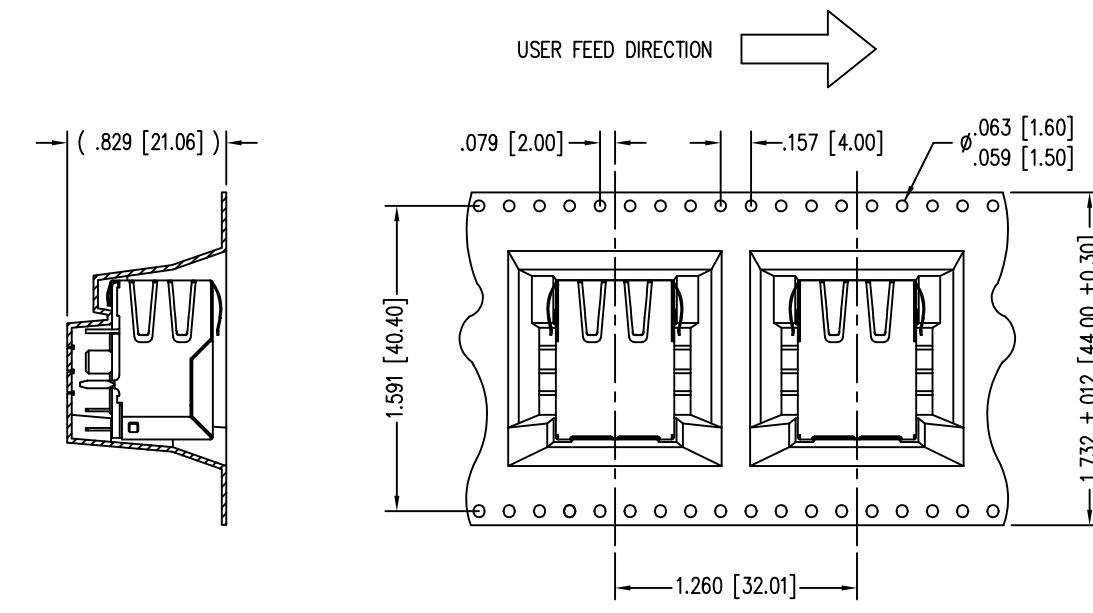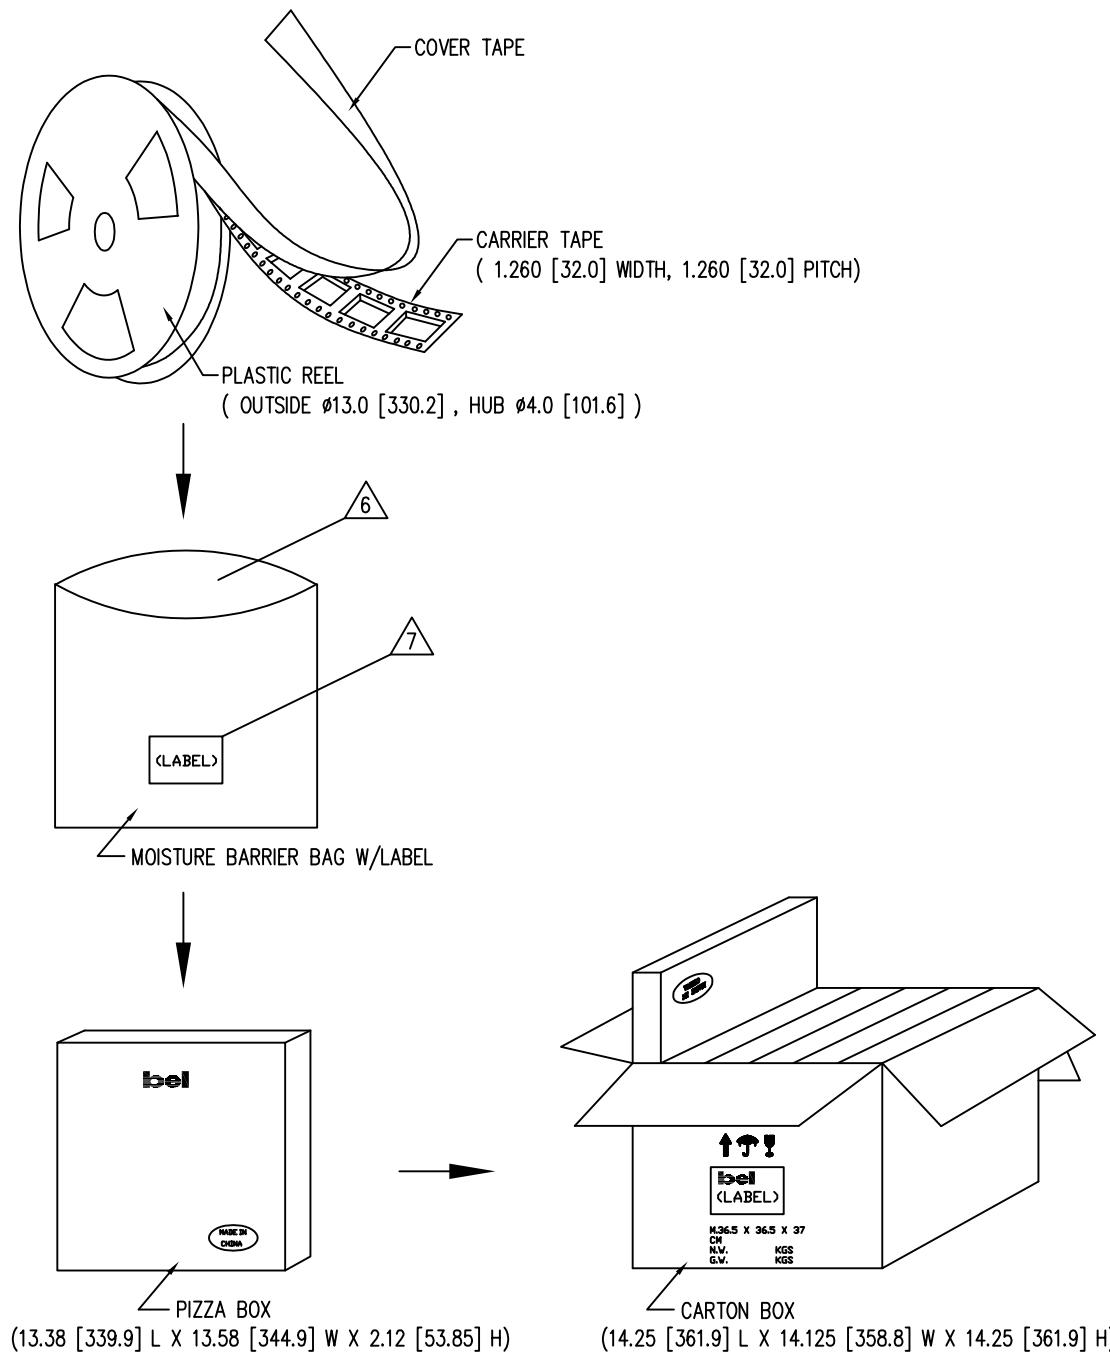

PART ORIENTATION & FEEDING DIRECTION.  
PART SS74800-087F ONLY

## NOTES:

1. LEAVE 48 INCHES COVER TAPE AND 5 EMPTY POCKETS AT TRAILER.
2. LEAVE 24 INCHES COVER TAPE AND 13 EMPTY POCKETS AT LEADER.
3. PACK 93 PIECES PER REEL.
4. EACH PIZZA BOX CONTAINS ONE ( 1 ) REEL.  
( 93 PARTS IN EACH PIZZA BOX )
5. EACH CARTON BOX CONTAINS SIX ( 6 ) PIZZA BOXES.  
( 558 PARTS IN EACH CARTON BOX )

6. EACH REEL IS PACKED IN A HEAT SEALED MOISTURE BARRIER BAG ALONG WITH DESICCANT AND MOISTURE INDICATOR CARD.

7. ALL LABELS TO INCLUDE:

- P/N
- QTY
- REV
- MSL 3
- MANUFACTURING DATE



THIRD ANGLE PROJECTION		11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512
DO NOT SCALE DRAWING		<a href="http://www.stewartconnector.com">http://www.stewartconnector.com</a>
DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE		
DIMENSIONS: INCHES [METRIC]		DRN BY: SHE DATE 6-4-05
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°		APPD BY: DANNY DATE 6-4-05
SHEET NO. 2 OF 2		DWG NO. CT740020F REV. C0
THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE VISIT: <a href="http://BELFUSE.COM/STEWART/STEWART_PATENTS/">HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/</a>		