


| REV | ECO | DATE |
|-----|-------|-----------|
| 001 | 59002 | 3/18/2024 |

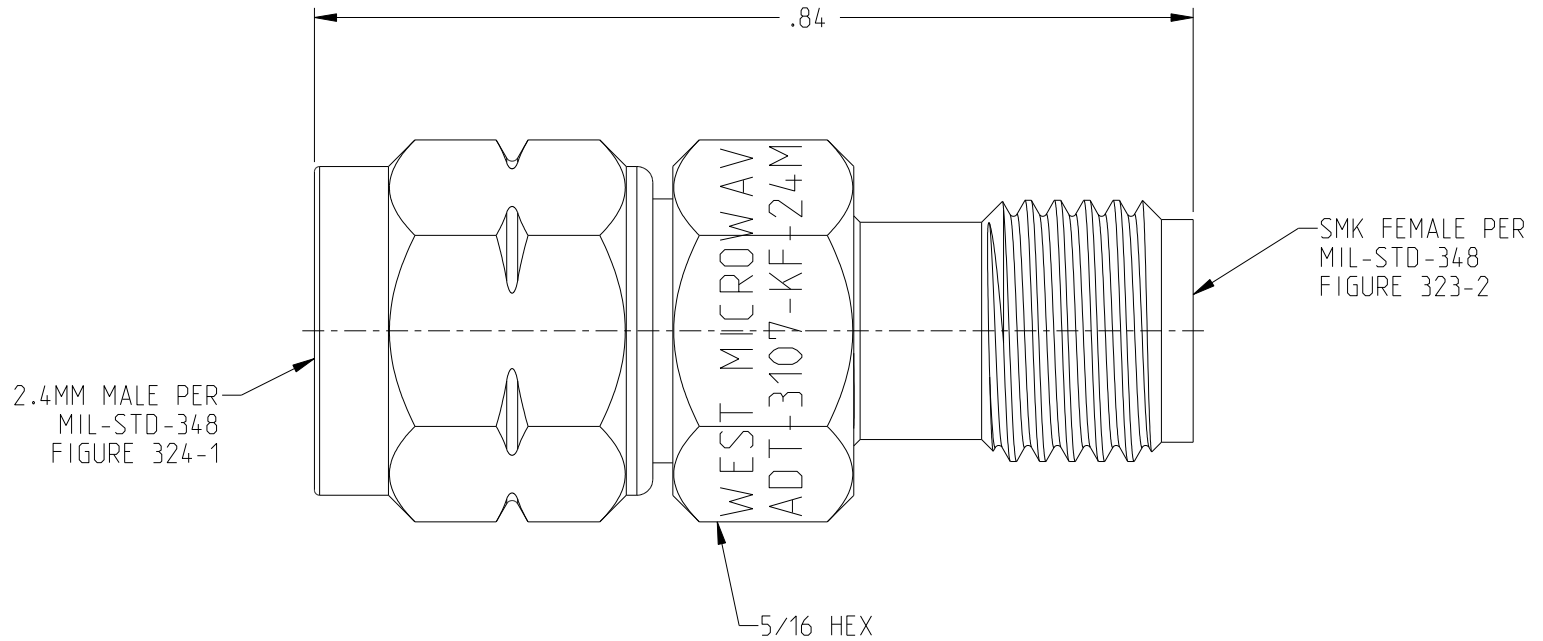

NOTES: UNLESS OTHERWISE SPECIFIED.

1. MATERIAL & FINISH:

- 1.1 HOUSING & NUT: PASSIVATED STAINLESS STEEL
- 1.2 SUPPORT BEAD: ULTEM 1000
- 1.3 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER

2. ELECTRICAL SPECIFICATIONS:

- 2.1 FREQUENCY RANGE: DC TO 40 GHz
- 2.2 IMPEDANCE: 50 OHMS NOMINAL
- 2.3 VSWR (MAX)
 - 2.3.1 DC TO 26.5 GHz: 1.10:1
 - 2.3.2 26.5 TO 40 GHz: 1.15:1
- 2.4 OPERATING TEMP RANGE: -65°C TO +125°C

| | | | | |
|--|---|----------------------|--|------------------|
| <p>NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018</p> | Model No: | ADT-3107-KF-24M-02 | MIDWEST MICROWAVE | |
| | RoHS2 <input checked="" type="checkbox"/> | Cage Code | 34078 | Title: |
| | 2011/65/EU | 3RD ANGLE PROJECTION | ADAPTER, 2.4MM MALE TO 2.92MM (SMK) FEMALE | |
| | UNLESS OTHERWISE SPECIFIED UNITS: INCH | ENGINEER: | R. BRENDAL | Drawing No. |
| | Date: | 4/2/2024 | ADT-3107-KF-24M-02-01 | 001 |
| | Size | A | DO NOT SCALE DRAWING | Workmanship Std: |
| | | | | Sheet 1 OF 1 |