
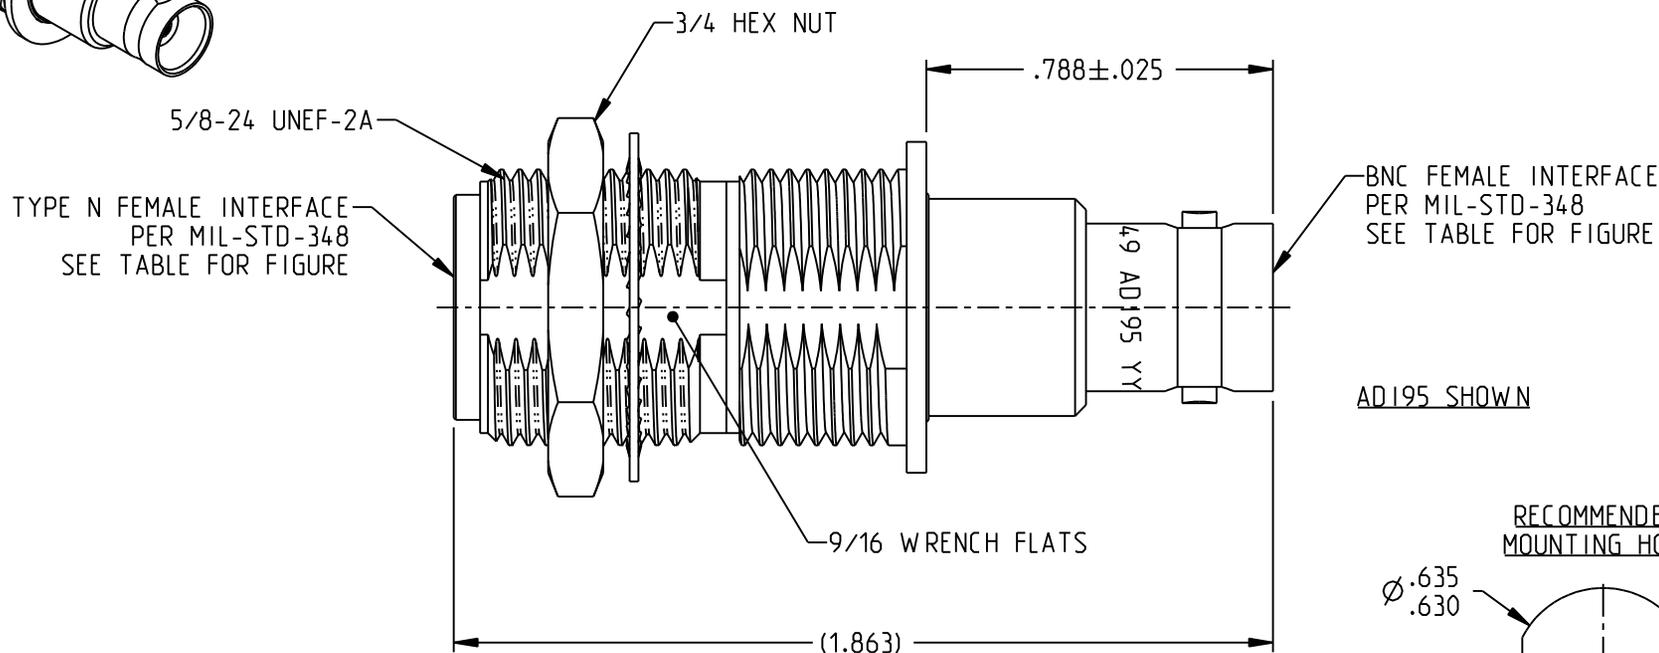


MODEL NUMBER	BNC FIGURE	TYPE N FIGURE
AD195	301-2	304-2
UAD195	330-1	331-1

REV	ECO	DATE
H	52570	08/27/2010
J	56281	05/18/2016
K	59323	02/13/2025

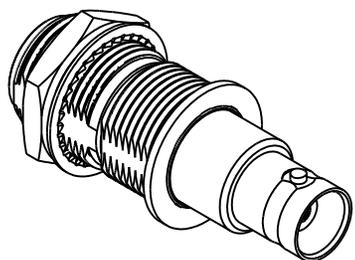

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS & FINISH:

- 1.1 BODY, SLEEVE, & ADAPTER: NICKEL PLATED BRASS
- 1.2 INSULATOR: PTFE (TEFLON)
- 1.3 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
- 1.4 HEX NUT: NICKEL PLATED COPPER ALLOY

2. ELECTRICAL SPECIFICATIONS:

- 2.1 IMPEDANCE: NON-CONSTANT
- 2.2 FREQUENCY (MAX): 500 MHZ

3. PANEL THICKNESS (MAX): .203

4. PANEL NUT TORQUE (MAX): 40 INCH POUNDS

<p>NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018</p>	Model No:	XAD195		Title: TROMPETER	
	RoHS2	Cage Code	14949	Title: ADAPTER, TYPE N JACK TO BNC JACK, INSULATED	
	2015/063/EU	3RD ANGLE PROJECTION	Drawing No.		REV.
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	ENGINEER:	C_105-0186		K
.XX ± .01	Date:	11/01/2024		Size	
.XXX ± .003	DO NOT SCALE DRAWING	Workmanship Std: TFS-4		Sheet	
.XXXX ± .0010	ANGLE ± 2° 00'	1 OF 1			