

NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: DC to 12.4 GHz.
- 1.2 ATTENUATION: 1 THRU 40dB IN 1dB INCREMENTS.
- 1.3 ATTENUATION ACCURACY:
- 1 THRU 6dB

7 THRU 20dB

21 THRU 40dB

±0.3dB

±0.5dB

±1.0dB
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 VSWR: 1.25:1 MAX.
- 1.6 MAXIMUM INPUT POWER:
- 10 WATTS AVG. AT +40°C DERATED


LINEARLY TO 1 WATT AT +125°C.
- 1.7 PEAK POWER: 100 W PEAK.
- 1.8 OPERATING TEMP. RANGE:
- 54°C to +125°C.

2.0 MARKING:

MARK UNIT AS SHOWN.

(REF: INK-09211-27-XX)

3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

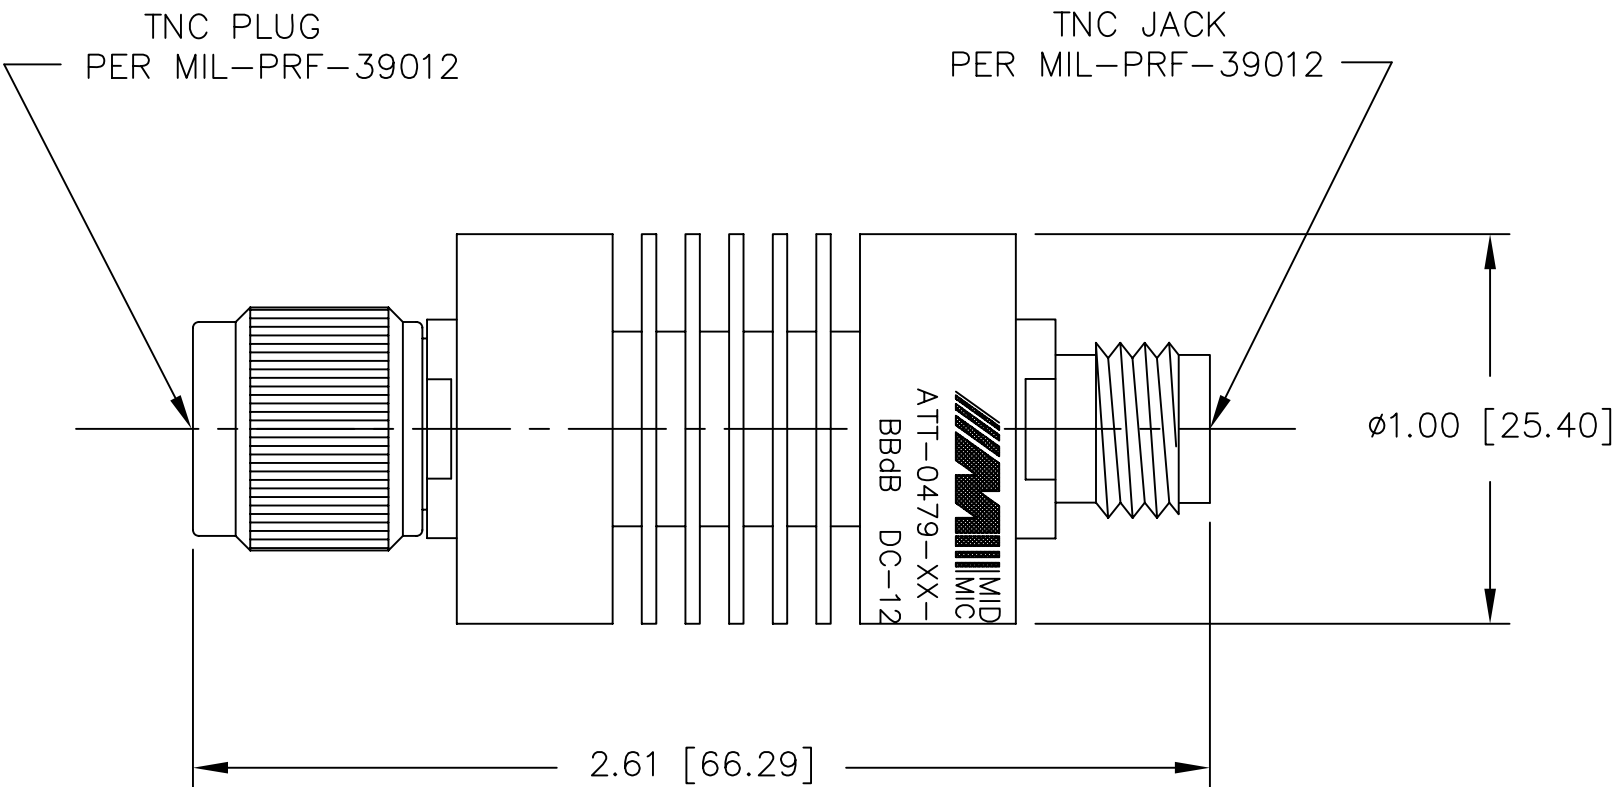

MODEL NUMBER	REV.
ATT-0479-XX-TNC-07	A

REV.	DESCRIPTION	DATE
-	RELEASED	8/10/05
A	ECN 20503	8/26/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		FSCM NO.	34078 <i>MIDWEST MICROWAVE</i>	
		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE ATTENUATOR
3 PLACE DECIMALS ±.005	DRAWN/DATE S.ORLOV 8/10/05		ENG./DATE G.KOZAK 8/10/05	DRAWING NUMBER ATT-0479-XX-TNC-07
2 PLACE DECIMALS ±.02	CHECKED/DATE		APPROVED/DATE	SCALE: 2=1
FRACTIONS ±1/64	ANGLES AND PERPENDICULARITY: ±1°			SHEET 1 of 1
PARALLELITY: T.I.R. _____				
FLATNESS: T.I.R. _____				
CONCENTRICITY: T.I.R. _____				