

NOTES:

1.0 SPECIFICATIONS:


- 1.1 FREQ. RANGE: DC TO 18.0 GHz
- 1.2 ATTENUATION ACCURACY:
- 0dB: +0.3/-0dB
- 0.5-10dB: ±0.3dB
- 10.5-20dB: ±0.5dB
- 20.5-40dB: ±1.0dB
- 41-60dB: ±1.5dB

1.3 MAXIMUM VSWR: 1.07 + .015 f (GHz)

1.4 MAXIMUM INPUT POWER: 2 WATTS AVG  
AT +25°C DERATED LINEARLY TO  
0.5 WATTS AT +125°C

1.5 OPERATING TEMP. RANGE: -65°C to +125°C

2.0 DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.

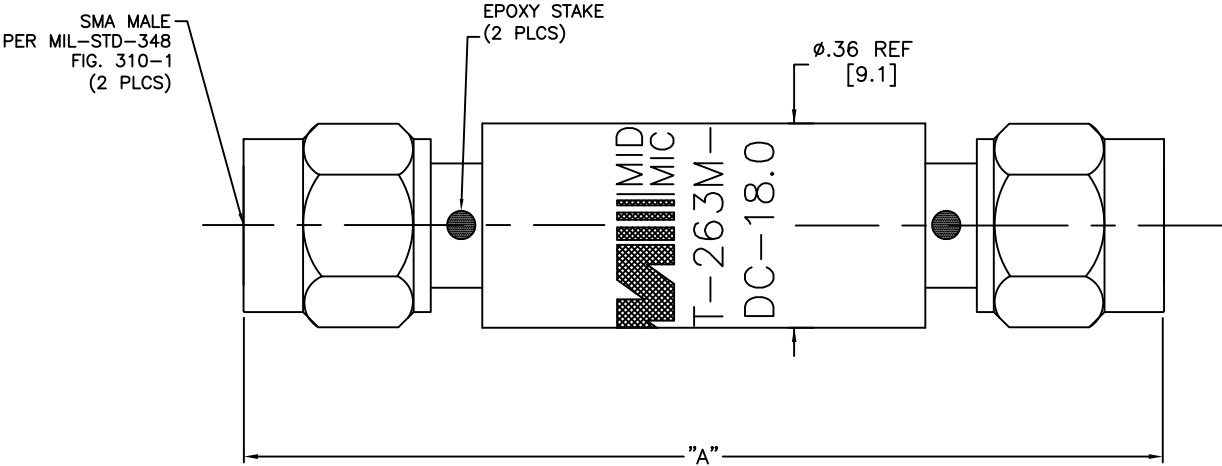

31 to 60 dB	1.44 [36.6]
0 to 30 dB	1.33 [33.8]
-XX- ATTENUATION VALUE	"A"

REV.	DESCRIPTION	DATE
-	RELEASED	11/13/90
A	ECR 6545	6/29/98
B	ECR 6933	11/9/90
B1	UPDATE MOD NO	8/28/92
C	ECO 20115	10/5/04
D	ECO 24015	12/20/11

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.  UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.003 2 PLACE DECIMALS ±.01 FRACTIONS ±1/64 PARALLELITY: T.I.R. FLATNESS: T.I.R. CONCENTRICITY: T.I.R. ANGLES AND PERPENDICULARITY: ±2°		CASE CODE <b>34078</b>		TITLE <b>MIDWEST MICROWAVE</b>	
		 Connectivity Solutions		ATTENUATOR 0 TO 60 dB OUTLINE DRAWING	
DESIGNED BY D. ESTY 11/13/90		DESIGNED BY G. KOZAK 2/19/91		DRAWING NUMBER ATT-263M-XX-SMA-02-01	REV. D
CHECKED BY A. BEATTY 2/15/91		APPROVED BY (Signature)		SCALE: 6:1	SHEET 1 of 1