


TABLE 1	
MODEL NUMBER	LENGTH
415-0528-006	6.00±.15
415-0528-012	12.00±.25
415-0528-018	18.00±.25
415-0528-024	24.00±.25
415-0528-036	36.00±.50

REV	ECO	DATE
1	INITIAL RELEASE	5/23/2022
2	EC-2312003	12/04/2023

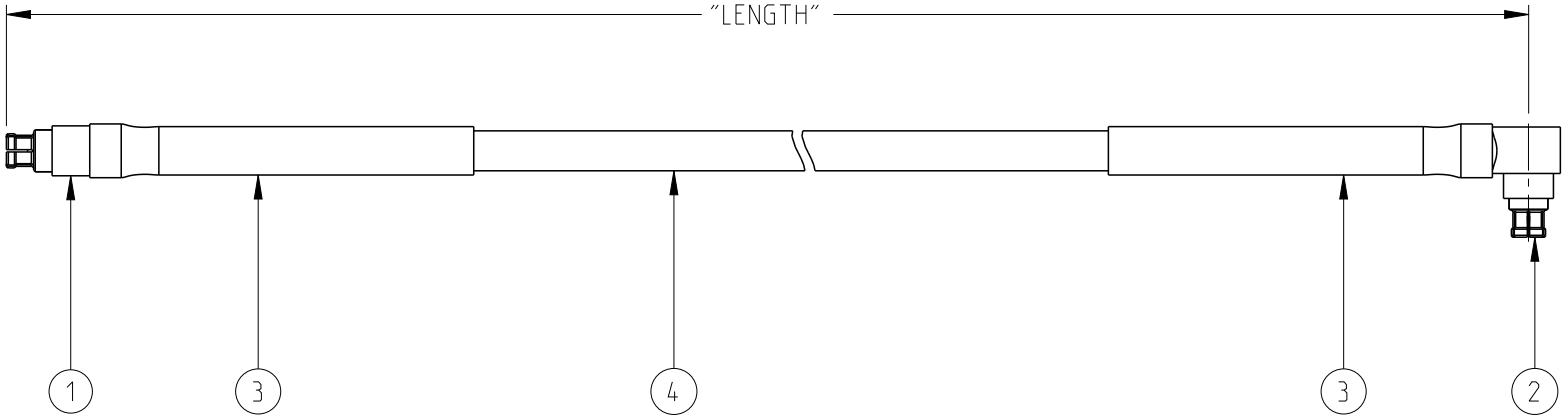

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE:
500 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
3. VSWR: 1.50 TYPICAL DC-30GHZ.

PART LIST		
ITEM	QTY	DESCRIPTION
1	1	SMPM STR FEMALE
2	1	SMPM RA FEMALE
3	2X 1.00±.10	HEAT SHRINK TUBING
4	AR	CABLE

 This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018.	Model No:	415-0528-001/999		JOHNSON			
	RoHS ☒ (EU)/2015/863 COMPLIANT	Cage Code	Title: CABEL ASSY, SMPM STR FEMALE TO SMPM RA FEMALE, .086" FLEXIBLE				
	UNLESS OTHERWISE SPECIFIED UNITS: INCH		Drawing No.	415-0528-001/999			REV.
	.XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°	Drawn by: ROMAN YAO Date: 5/23/2022	Size A	DO NOT SCALE DRAWING	Workmanship Std/Sheet NONE	1 OF 1	