


TABLE 1	
MODEL NUMBER	LENGTH
415-0533-MM200	200mm ± 6
415-0533-MM250	250mm ± 6
415-0533-MM500	500mm ± 6
415-0533-M1.0	1000mm ± 12

REV	ECO	DATE
1	INITIAL RELEASE	5/23/2022
2	EC-2302001	2/2/2023
3	EC-2304002	4/11/2023
4	EC-2310010	10/30/2023

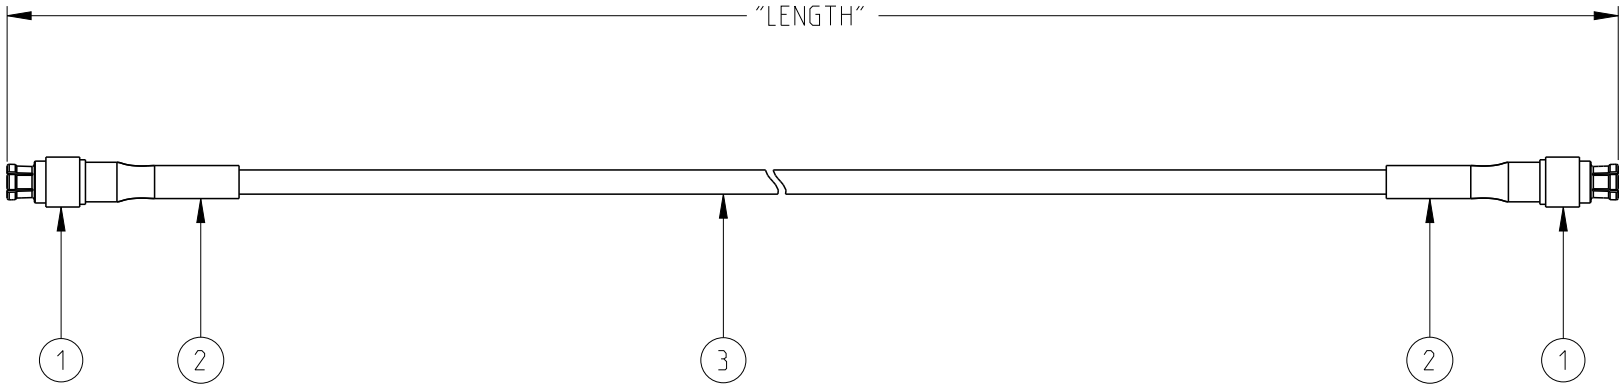

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
3. VSWR: 1.50 TYPICAL DC-40GHz.

PART LIST		
ITEM	QTY	DESCRIPTION
1	2	SMPM STR FEMALE
2	2X .40 $\pm$.10	HEAT SHRINK TUBING
3	AR	CABLE

 This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018.	Model No:	415-0533-MXXXX		JOHNSON		
	RoHS ☒ (EU)/2015/863 COMPLIANT	Cage Code	Title: CABLE ASSY. METRIC. SMPM STR FEMALE TO SMPM STR FEMALE. .047" FLEXIBLE			
	UNLESS OTHERWISE SPECIFIED UNITS: INCH		Drawing No.	REV.		
	.XX $\pm$.01 .XXX $\pm$.003 .XXXX $\pm$.0010 ANGLE $\pm$ 2°	Drawn by: ROMAN YAO	415-0533-MXXXX		4	
Date: 5/23/2022		Size A	DO NOT SCALE DRAWING	Workmanship Std: NONE	Sheet 1 OF 1	