


TABLE 1	
MODEL NUMBER	LENGTH
415-0534-006	6.00±.15
415-0534-012	12.00±.25
415-0534-018	18.00±.25
415-0534-024	24.00±.25
415-0534-036	36.00±.50

REV	ECO	DATE
1	INITIAL RELEASE	5/23/2022
2	EC-2310010	10/30/2023
3	EC-2401005	1/12/2024

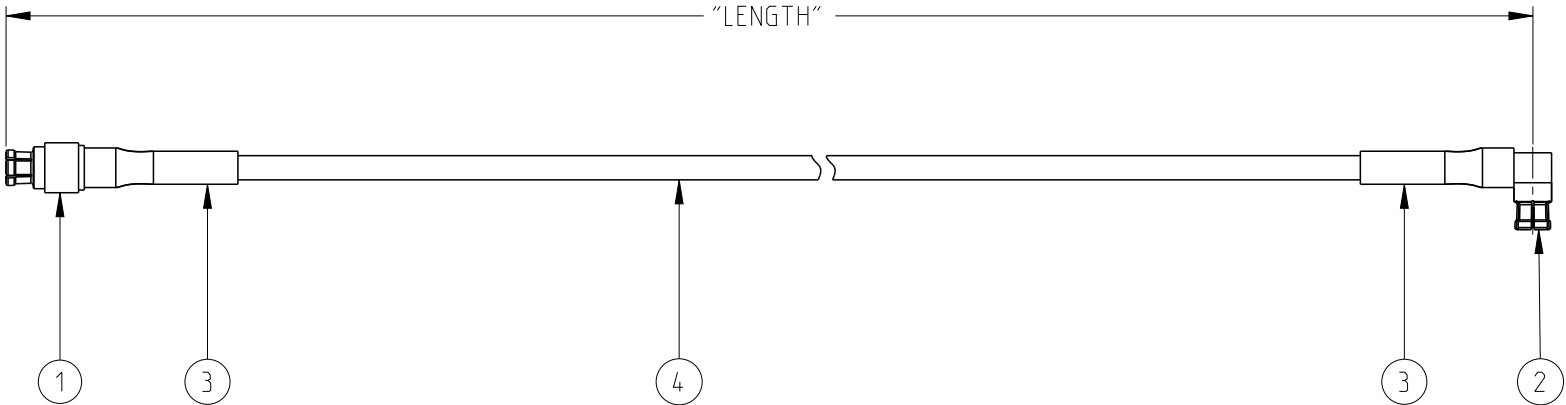

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
3. VSWR: 1.30 TYPICAL DC-20GHz.

PART LIST		
ITEM	QTY	DESCRIPTION
1	1	SMPM STR FEMALE
2	1	SMPM RA FEMALE
3	2X .40±.10	HEAT SHRINK TUBING
4	AR	CABLE

 This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018.	Model No: 415-0534-001/999	JOHNSON	
	RoHS ☒ (EU)/2015/863 COMPLIANT	Cage Code	Title: CABLE ASSY. SMPM STR FEMALE TO SMPM RA FEMALE. .047" FLEXIBLE
	UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°	3RD ANGLE PROJECTION Drawn by: ROMAN YAO Date: 5/23/2022	Drawing No. 415-0534-001/999 Size A DO NOT SCALE DRAWING
			REV. 3 Workmanship Std Sheet 1 OF 1