


TABLE 1	
MODEL NUMBER	LENGTH
415-0535-006	6.00±.15
415-0535-012	12.00±.25
415-0535-018	18.00±.25
415-0535-024	24.00±.25
415-0535-036	36.00±.50

REV	ECO	DATE
1	INITIAL RELEASE	5/23/2022
2	EC-2310010	10/30/2023
3	EC-2401005	1/12/2024

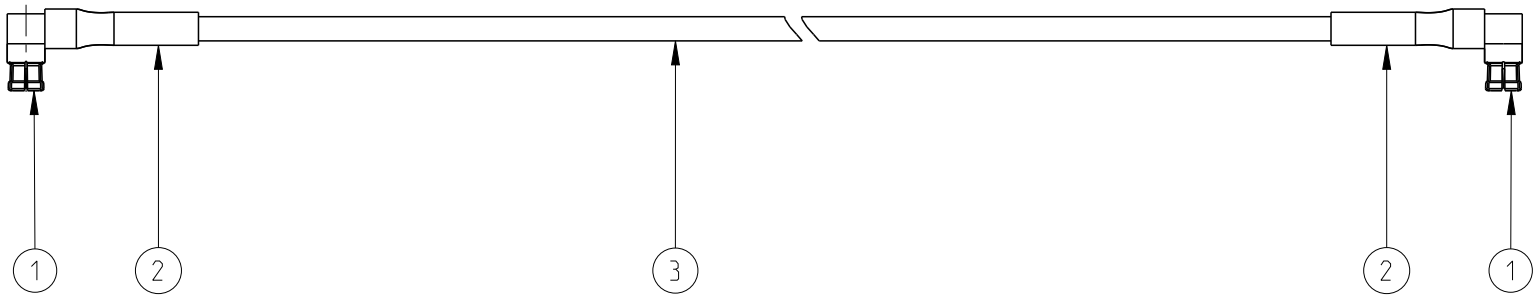

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE:
500 VRMS FOR A PERIOD OF ONE MINUTE.
- 2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
- 3. VSWR: 1.30 TYPICAL DC-20GHZ.

PART LIST		
ITEM	QTY	DESCRIPTION
1	2	SMPM RA FEMALE
2	2X .40±.10	HEAT SHRINK TUBING
3	AR	CABLE

 This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018.	Model No: 415-0535-001/999	JOHNSON	
	RoHS ☒ (EU)/2015/863 COMPLIANT	Title: CABLE ASSY, SMPM RA FEMALE TO SMPM RA FEMALE, .047" FLEXIBLE	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°	3RD ANGLE PROJECTION Drawn by: ROMAN YAO Date: 5/23/2022	Drawing No. 415-0535-001/999 Size A DO NOT SCALE DRAWING
			REV. 3 Workmanship Std/Sheet NONE 1 OF 1