


TABLE 1	
MODEL NUMBER	LENGTH
415-0573-MM100	100mm ± 6
415-0573-MM200	200mm ± 6

REV	ECO	DATE
1	INITIAL RELEASE	03/18/2025

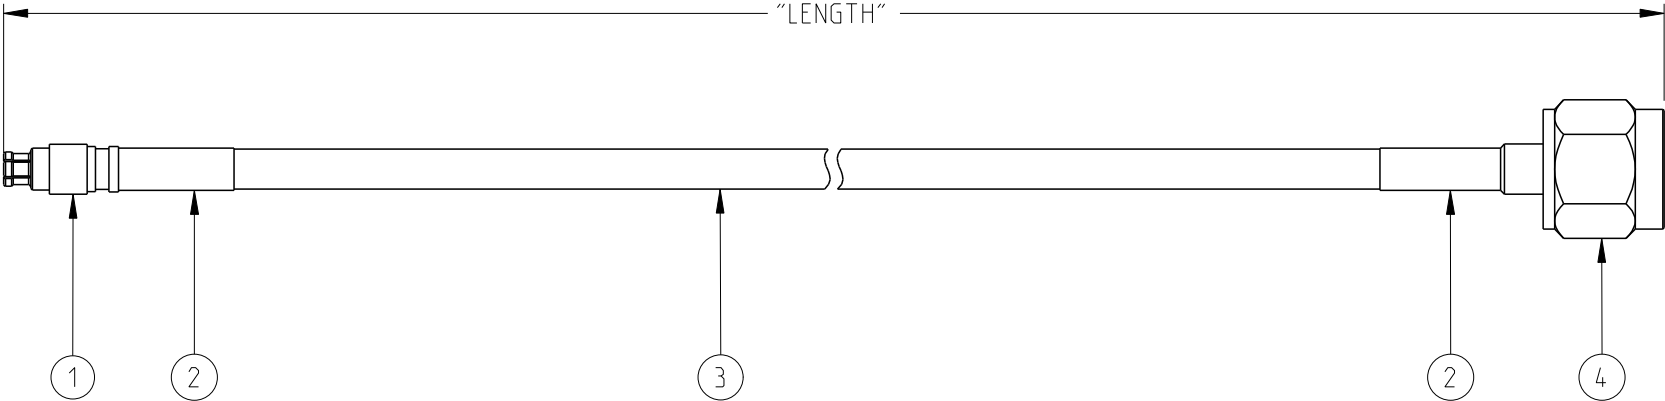

PART LIST		
ITEM	QTY	DESCRIPTION
1	1	SMPM FEMALE
2	2 X1.00 $\pm$.10	HEAT SHRINK TUBING
3	AR	CABLE
4	1	SMA MALE

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE:
500 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
3. ASSEMBLIES TO BE PACKAGED 1 PER BAG.
4. VSWR: 1.35 MAX DC-26.5GHZ

This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018.	Model No:	415-0573-MXXXX		JOHNSON	
	RoHS ☒ (EU)/2015/863 COMPLIANT	Cage Code	34078	Title: CABLE ASSY. METRIC. STR SMPM FEMALE TO STR SMA MALE, .086" FLEXIBLE	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	3RD ANGLE PROJECTION			
	.XX $\pm$.01 .XXX $\pm$.003 .XXXX $\pm$.0010 ANGLE $\pm$ 2°	Drawn by:	JIMMY CHEN	Drawing No.	415-0573-MXXXX
		Date:	03/18/2025	Size	A
				DO NOT SCALE DRAWING	Workmanship Std: NONE
				Sheet	1 OF 1
				REV.	1