


TABLE 1	
MODEL NUMBER	LENGTH
415-0501-006	6.00±.15
415-0501-012	12.00±.25

REV	ECO	DATE
1	INITIAL RELEASE	3/16/2021
2	EC-2207016	7/28/2022

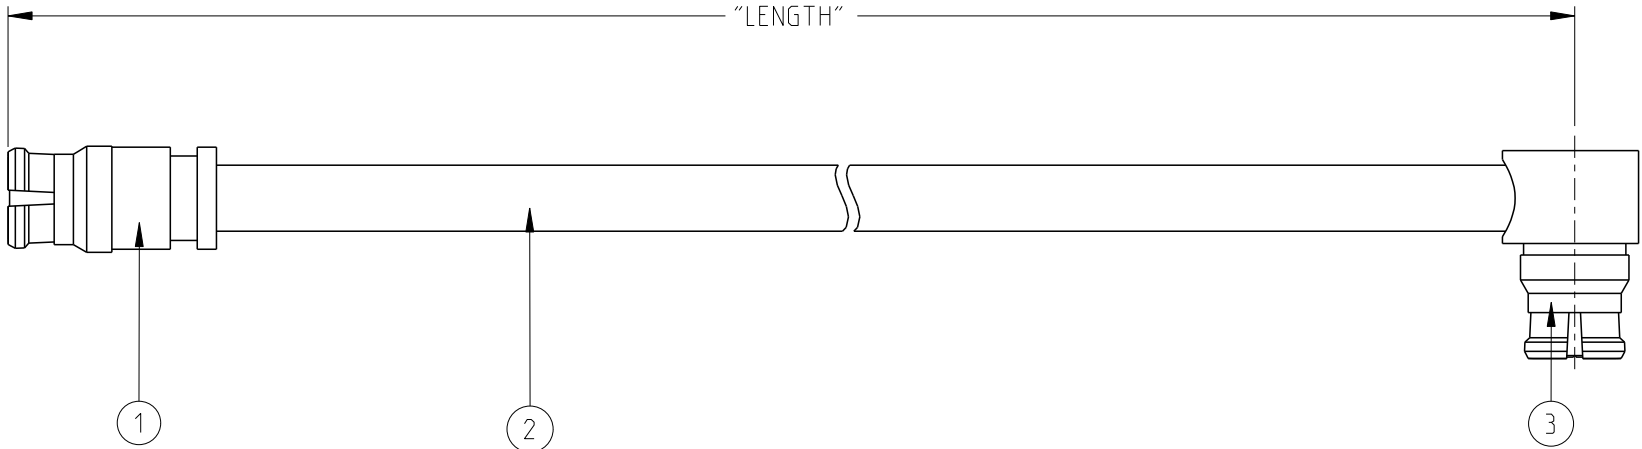

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE:
500 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
3. ASSEMBLIES TO BE PACKAGED 1 PER BAG.
4. VSWR: 1.50 MAX DC-18GHz

PART LIST		
ITEM	QTY	DESCRIPTION
1	1	SMP FEMALE
2	AR	CABLE
3	1	R/A SMP FEMALE

This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018.	Model No: 415-0501-001/999		JOHNSON	
	RoHS ☒ (EU)/2015/863 COMPLIANT	Cage Code 34078	Title: CABLE ASSY. STR SMP FEMALE TO R/A SMP FEMALE, .086" SEMI-RIGID CONFORMABLE	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°	3RD ANGLE PROJECTION Drawn by: TOMMY REN Date: 3/16/2021	Drawing No. 415-0501-001/999	REV. 2
	Size A	DO NOT SCALE DRAWING	Workmanship Std/Sheet NONE	1 OF 1