


TABLE 1	
MODEL NUMBER	LENGTH
415-0507-MM200	200mm ± 6
415-0507-MM250	250mm ± 6


REV	ECO	DATE
1	INITIAL RELEASE	3/16/2021
2	EC-2207016	7/28/2022

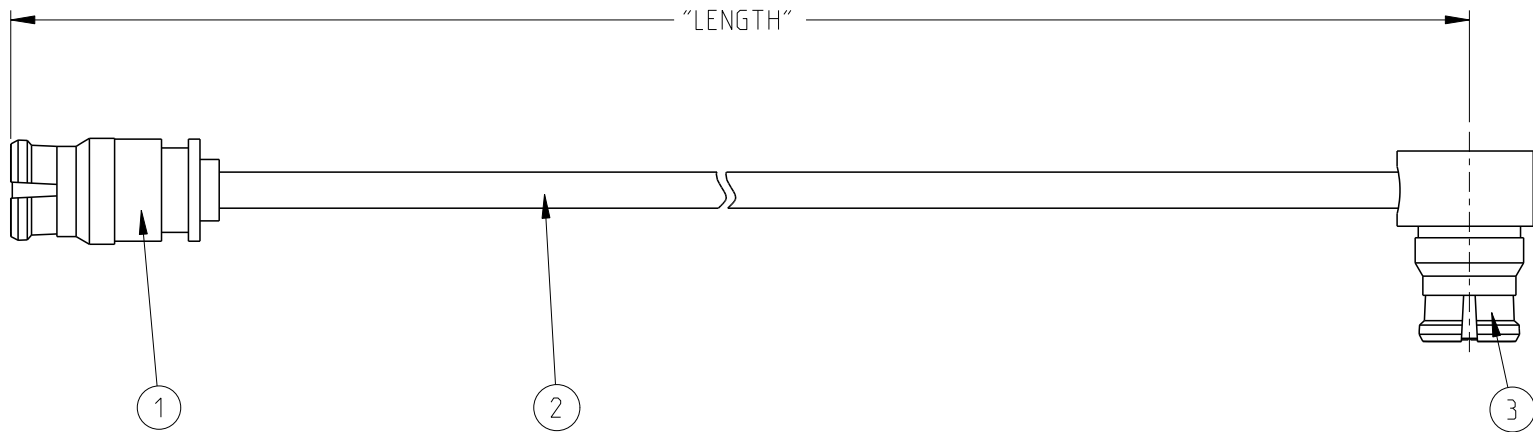

PART LIST		
ITEM	QTY	DESCRIPTION
1	1	SMP FEMALE
2	AR	CABLE
3	1	R/A SMP FEMALE

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE:
500 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
3. ASSEMBLIES TO BE PACKAGED 1 PER BAG.
4. VSWR: 1.50 MAX DC-18GHz

 This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018.	Model No: 415-0507-MXXXX		JOHNSON	
	RoHS ☒ (EU)/2015/863 COMPLIANT		Title: CABLE ASSY. METRIC, STR SMP FEMALE TO R/A SMP FEMALE, .047" SEMI-RIGID CONFORMABLE	
	Cage Code 34078		Drawing No. 415-0507-MXXXX	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX $\pm$.01 .XXX $\pm$.003 .XXXX $\pm$.0010 ANGLE $\pm$ 2°		3RD ANGLE PROJECTION  Drawn by: TOMMY REN Date: 3/16/2021	
		Size A	DO NOT SCALE DRAWING	Workmanship Std: NONE Sheet: 1 OF 1