


TABLE 1	
MODEL NUMBER	LENGTH
415-0508-MM200	200mm ± 6
415-0508-MM250	250mm ± 6


REV	ECO	DATE
1	INITIAL RELEASE	3/16/2021
2	EC-2207016	7/28/2022

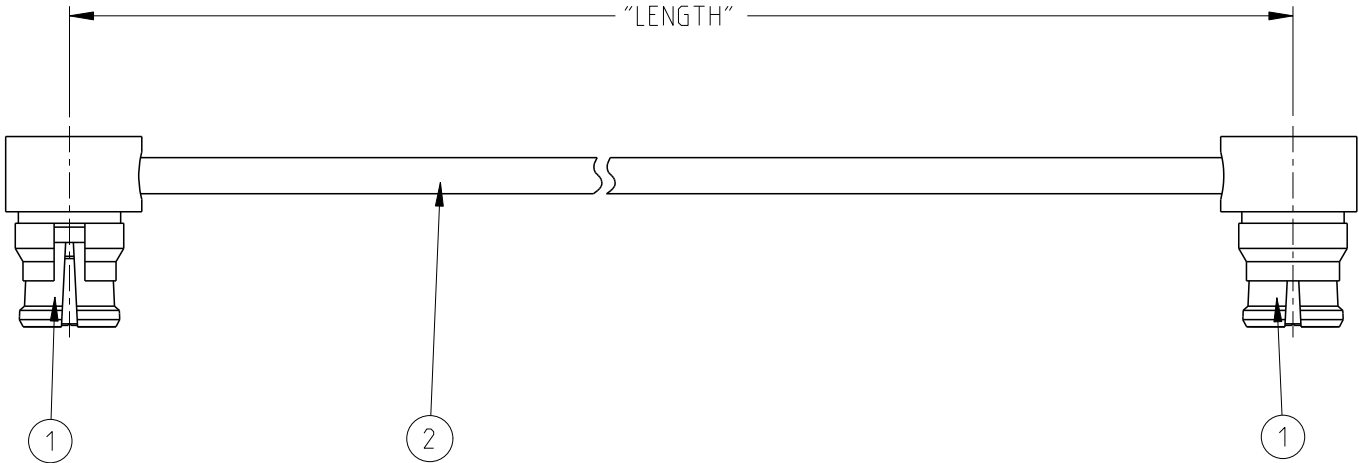

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE:
500 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
3. ASSEMBLIES TO BE PACKAGED 1 PER BAG.
4. VSWR: 1.50 MAX DC-18GHz

PART LIST		
ITEM	QTY	DESCRIPTION
1	2	R/A SMP FEMALE
2	AR	CABLE

 This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018.	Model No:	415-0508-MXXXX		JOHNSON	
	RoHS ☒ (EU)/2015/863 COMPLIANT	Cage Code	34078	Title: CABLE ASSY. METRIC, R/A SMP FEMALE TO R/A SMP FEMALE, .047" SEMI-RIGID CONFORMABLE	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	3RD ANGLE PROJECTION			
	.XX $\pm$.01 .XXX $\pm$.003 .XXXX $\pm$.0010 ANGLE $\pm$ 2°	Drawn by:	TOMMY REN	Drawing No.	415-0508-MXXXX
		Date:	3/16/2021	Size	A
		DO NOT SCALE DRAWING		Workmanship Std	NONE
				Sheet	1 OF 1
				REV.	2