


| TABLE 1      |           |
|--------------|-----------|
| MODEL NUMBER | LENGTH    |
| 415-0510-006 | 6.00±.15  |
| 415-0510-012 | 12.00±.25 |
| 415-0510-018 | 18.00±.25 |
| 415-0510-024 | 24.00±.25 |
| 415-0510-036 | 36.00±.50 |

| REV | ECO             | DATE       |
|-----|-----------------|------------|
| 1   | INITIAL RELEASE | 04/24/2023 |
| 2   | EC-2408008      | 08/15/2024 |
|     |                 |            |

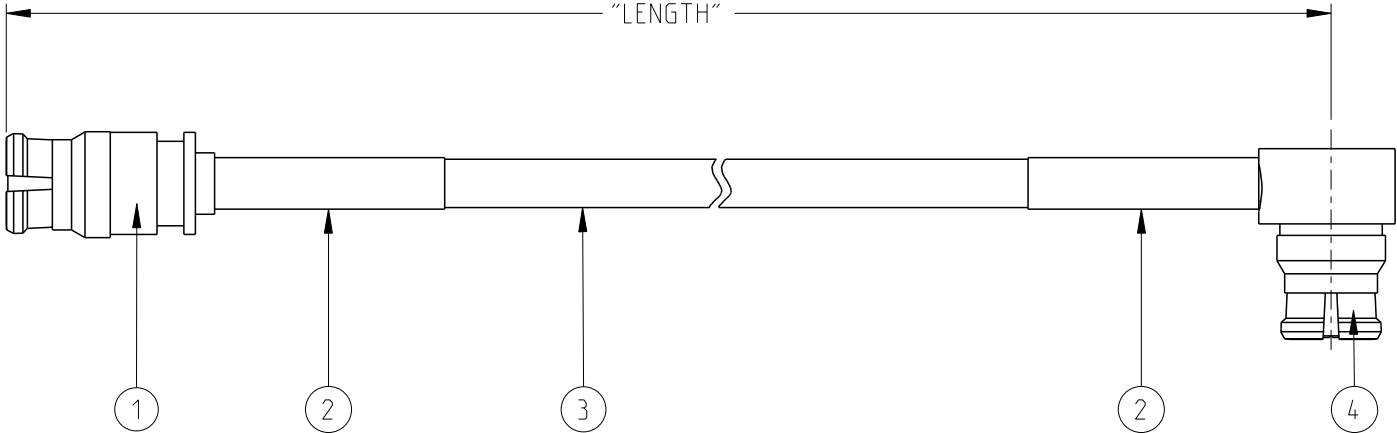

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
3. ASSEMBLIES TO BE PACKAGED 1 PER BAG.
4. VSWR: 1.50 MAX DC-18GHz

| PART LIST |             |                    |
|-----------|-------------|--------------------|
| ITEM      | QTY         | DESCRIPTION        |
| 1         | 1           | SMP FEMALE         |
| 2         | 2 X .40±.10 | HEAT SHRINK TUBING |
| 3         | AR          | CABLE              |
| 4         | 1           | R/A SMP FEMALE     |

|                                                                                                                                                                                                                                                                                                                      |                                                                  |                                          |        |                                                                     |             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------|--------|---------------------------------------------------------------------|-------------|
| <p>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018.</p> | Model No:                                                        | 415-0510-001/999                         |        | JOHNSON                                                             |             |
|                                                                                                                                                                                                                                                                                                                      | RoHS <input checked="" type="checkbox"/> (EU)/2015/863 COMPLIANT | Cage Code                                | 34078  | Title: CABLE ASSY, STR SMP FEMALE TO R/A SMP FEMALE, .047" FLEXIBLE |             |
|                                                                                                                                                                                                                                                                                                                      | UNLESS OTHERWISE SPECIFIED UNITS: INCH                           | 3RD ANGLE PROJECTION                     |        | Drawing No.                                                         | REV.        |
|                                                                                                                                                                                                                                                                                                                      | .XX ± .01<br>.XXX ± .003<br>.XXXX ± .0010<br>ANGLE ± 2°          | Drawn by: JIMMY CHEN<br>Date: 04/24/2023 | Size A | 415-0510-001/999<br>DO NOT SCALE DRAWING                            | 2<br>1 OF 1 |