


TABLE 1	
MODEL NUMBER	LENGTH
415-0511-MM100	100mm ±6
415-0511-MM200	200mm ±6
415-0511-MM250	250mm ±6
415-0511-MM500	500mm ±6
415-0511-M1.0	1000mm ±12

REV	ECO	DATE
1	INITIAL RELEASE	04/24/2023
2	EC-2312006	12/12/2023
3	EC-2408008	08/15/2024

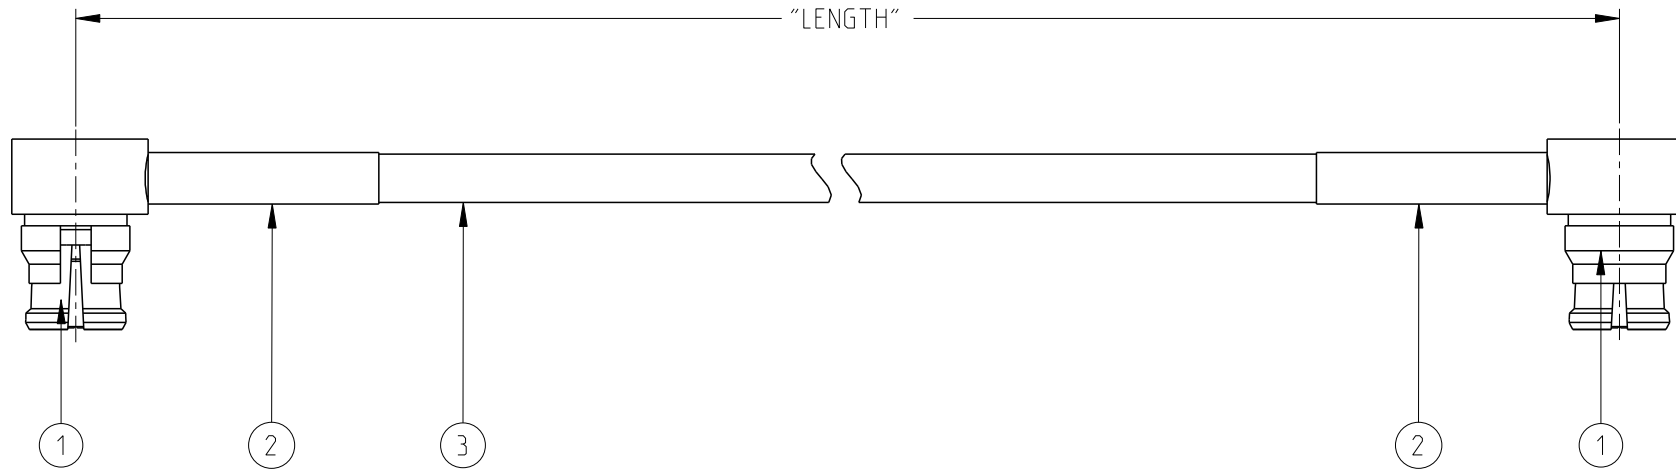

PART LIST		
ITEM	QTY	DESCRIPTION
1	2	R/A SMP FEMALE
2	2 X .40±.10	HEAT SHRINK TUBING
3	AR	CABLE

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
3. ASSEMBLIES TO BE PACKAGED 1 PER BAG.
4. VSWR: 1.50 MAX DC -18GHz

<p>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018</p>	Model No:	415-0511-MXXXX		JOHNSON		
	RoHS <input checked="" type="checkbox"/> (EU)/2015/863 COMPLIANT	Cage Code	34078		Title:	CABLE ASSY, METRIC, R/A SMP FEMALE TO R/A SMP FEMALE, .047" FLEXIBLE
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	3RD ANGLE PROJECTION			Drawing No.	415-0511-MXXXX
	.XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°	Drawn by:	JIMMY CHEN		REV.	3
	Date:	04/24/2023		Size	A DO NOT SCALE	
				Workmanship Std	NONE	
				Sheet	1 OF 1	