


TABLE 1	
MODEL NUMBER	LENGTH
415-0520-006	6.00±.15
415-0520-012	12.00±.25

REV	ECO	DATE
1	INITIAL RELEASE	3/16/2021
2	EC-2207016	7/28/2022

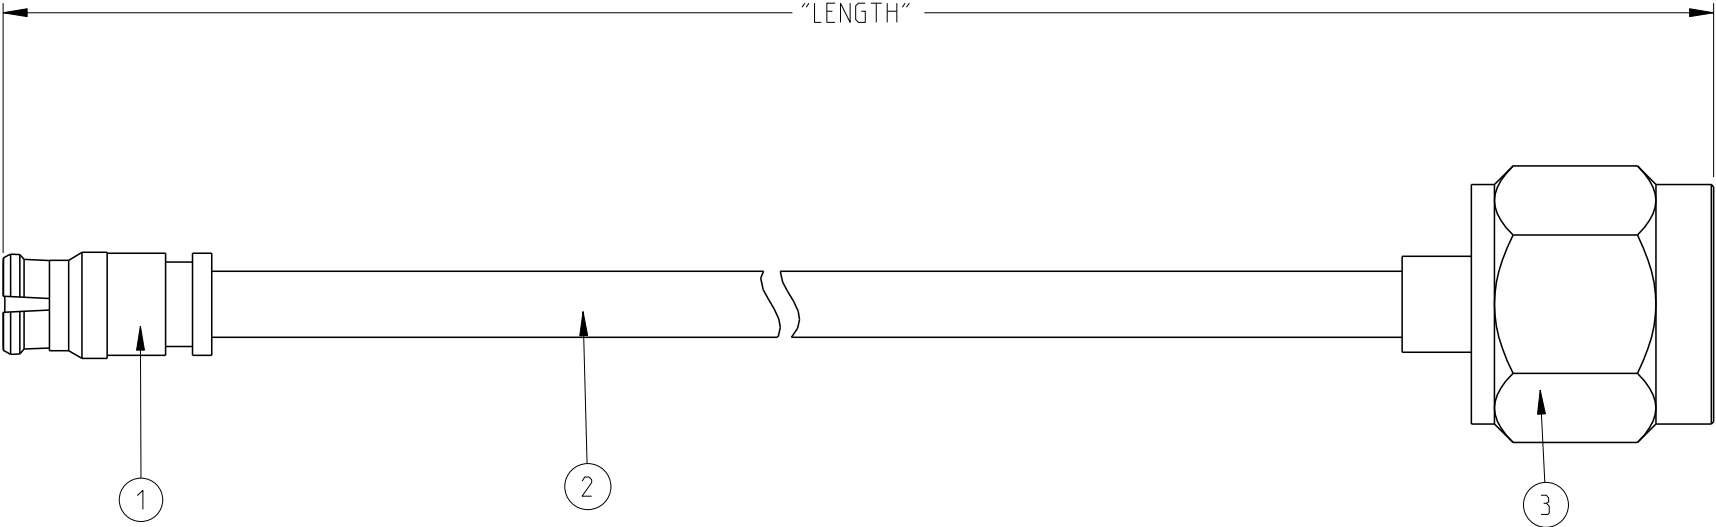

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE:
500 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
3. ASSEMBLIES TO BE PACKAGED 1 PER BAG.
4. VSWR: 1.50 MAX DC-18GHz

PART LIST		
ITEM	QTY	DESCRIPTION
1	1	SMP FEMALE
2	AR	CABLE
3	1	SMA MALE

This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018.	Model No:	415-0520-001/999		JOHNSON	
	RoHS ☒ (EU)/2015/863 COMPLIANT	Cage Code	34078	Title: CABLE ASSY. STR SMP FEMALE TO STR SMA MALE. .086" SEMI-RIGID CONFORMABLE	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	3RD ANGLE PROJECTION			
	.XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°	Drawn by:	TOMMY REN	Drawing No.	415-0520-001/999
		Date:	3/16/2021	Size	A
				DO NOT SCALE DRAWING	Workmanship Std/Sheet
				NONE	1 OF 1
				REV.	2