
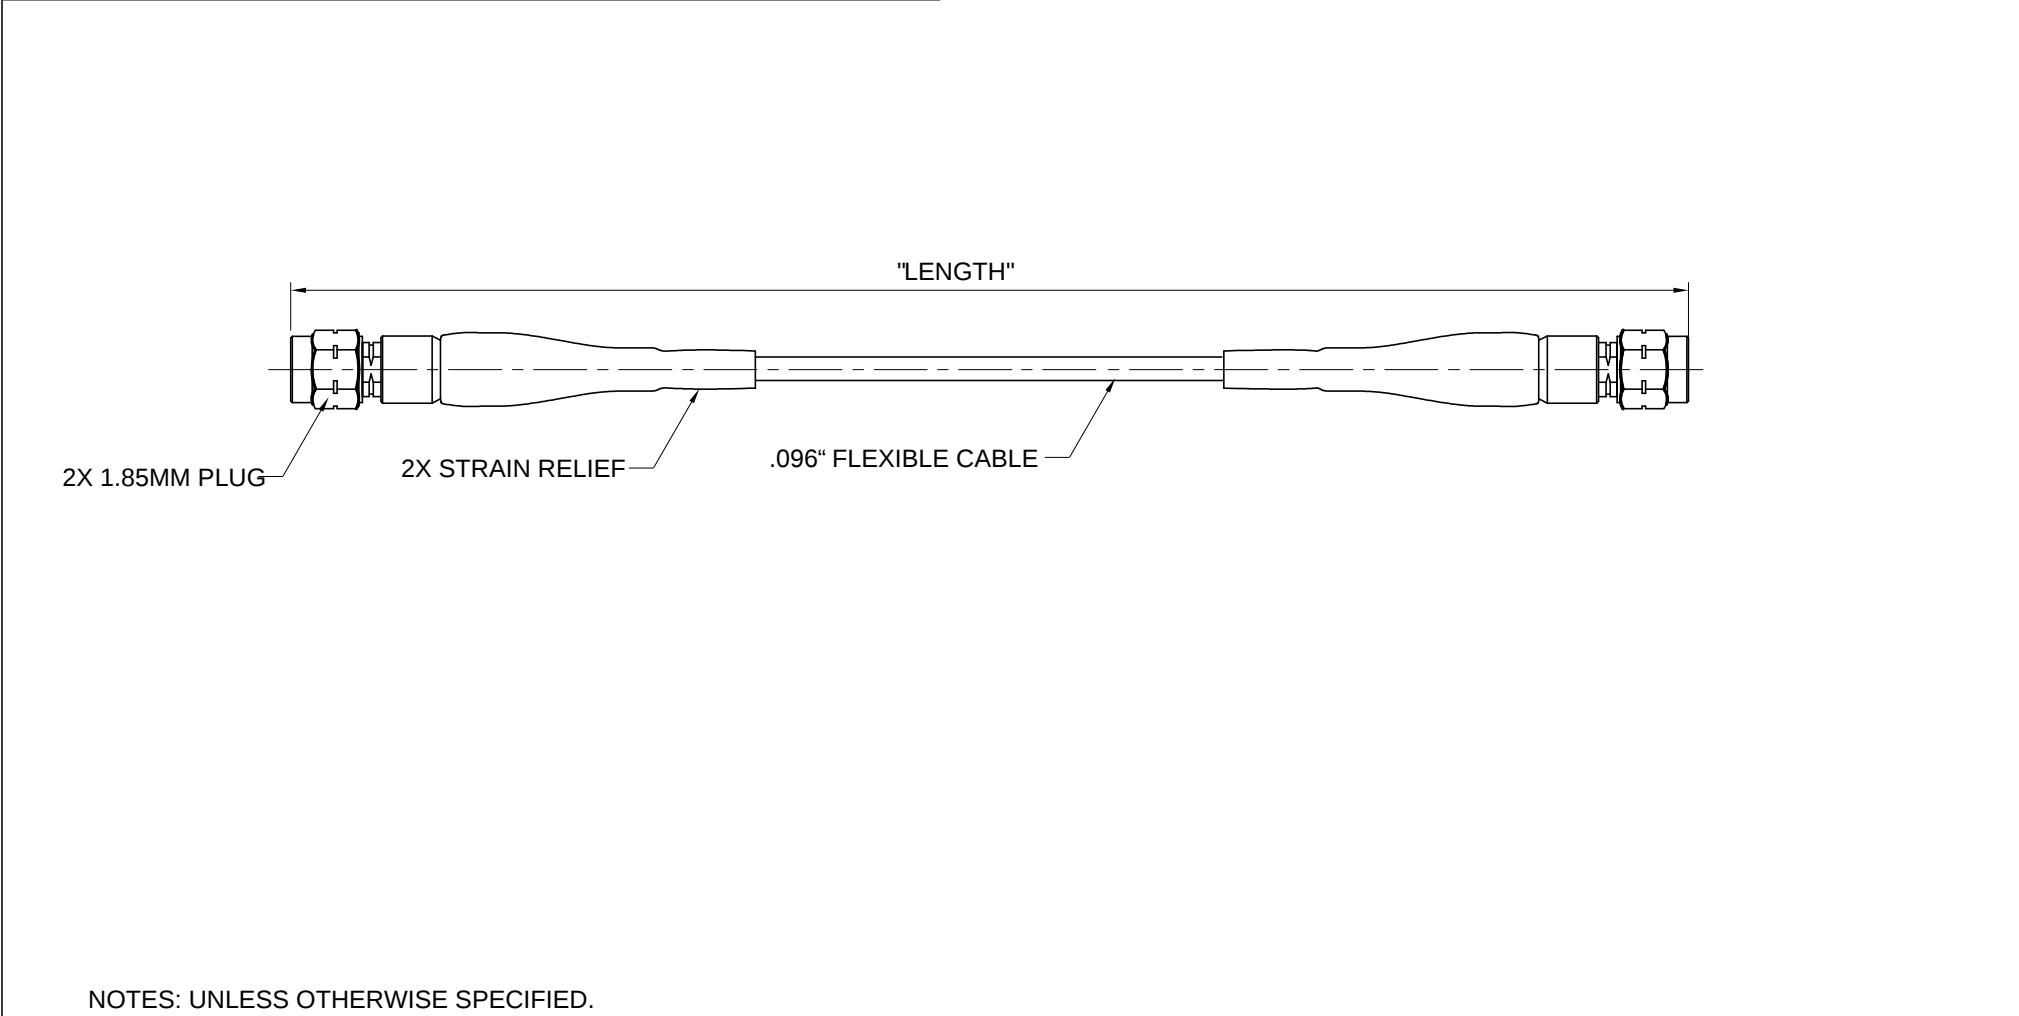


TABLE 1		INSERTION LOSS (MAX dB)		VSWR
MODEL NUMBER	LENGTH	20GHz	67GHz	DC ~ 67GHz
415-0537-006	6.00 +.157/-0	-0.8	-1.5	1.3
415-0537-012	12.00 +.196/-0	-1.5	-2.4	1.3
415-0537-018	18.00 +.314/-0	-2.1	-3.3	1.3
415-0537-024	24.00 +.393/-0	-2.8	-4.0	1.3
415-0537-036	36.00 +.590/-0	-3.5	-6.1	1.3

REV	ECO	DATE
1	INITIAL RELEASE	9-30-2021



- NOTES: UNLESS OTHERWISE SPECIFIED.
1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS FOR A PERIOD OF ONE MINUTE.
 2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.

 This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.	Model No: 415-0537-001/999		JOHNSON	
	RoHS ☒ (EU)/2015/863 COMPLIANT	Cage Code 34078	Title: CABLE ASSY, STR 1.85MM PLUG TO STR 1.85MM PLUG, .096" FLEXIBLE, LOW LOSS CABLE	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	3RD ANGLE PROJECTION 	Drawing No. 415-0537-001/999	REV. 1
	.XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°	Drawn by: TOMMY REN Date: 9-30-2021	Size A DO NOT SCALE DRAWING	Workmanship Std: NONE Sheet 1 OF 1