TABLE 1		
MODEL NUMBER	"L"	MARKER △5
21-20-M1.0	1.0 M	21-20-M1.0 14949 ######
21-20-M1.5	1.5 M	21-20-M1.5 14949 ######
21-20-M2.0	2.0 M	21-20-2.0 14949 ######
21-20-M2.5	2.5 M	21-20-2.5 14949 ######
21-20-M3.0	3.0 M	21-20-M3.0 14949 ######
21-20-M3.5	3.5 M	21-20-3.5 14949 ######
21-20-M4.0	4.0 M	21-20-M4.0 14949 ######
21-20-M4.5	4.5 M	21-20-M4.5 14949 ######
21-20-M5.0	5.0 M	21-20-M5.0 14949 ######

WIRING SCHEMATIC



REV	ECO	DATE
001	57750	10/16/2020

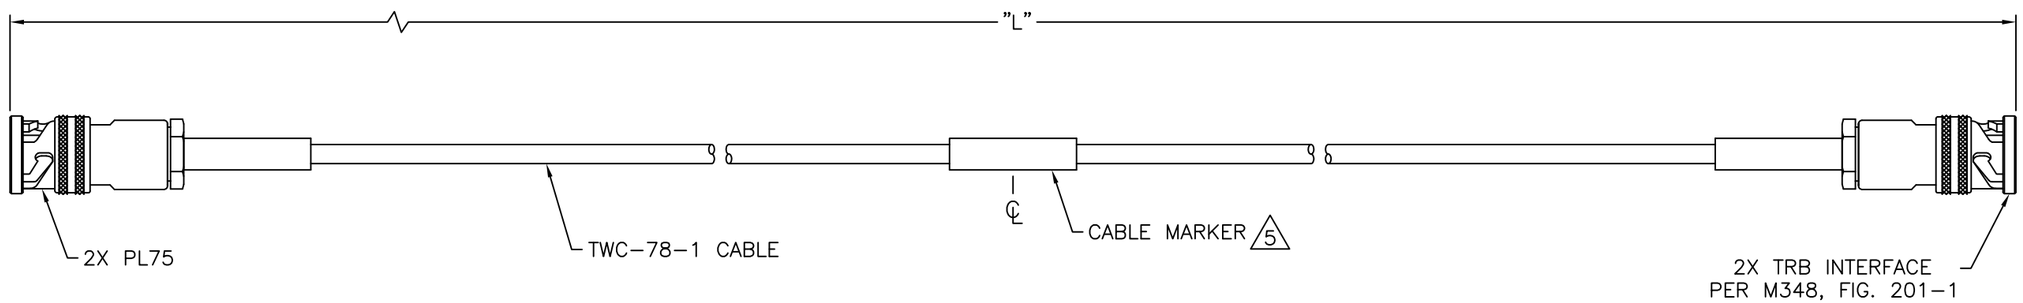

NOTES: UNLESS OTHERWISE SPECIFIED.

1. WORKMANSHIP PER IPC/WHMA-A-620, CLASS 3, SECTION 13.

△2. TOLERANCE PER IPC/WHMA-A-620, SECTION 11.1

3. TESTING:
   3.1 CONTINUITY
   3.2 DWV: 400 VRMS

4. BEND RADIUS (MIN): 1.5

△5. MARKERS:
   5.1 MARKER PER TABLE 1.
   5.2 ###### = LOT CODE

cinch CONNECTIVITY SOLUTIONS a tel group	Model No. 21-20-MX.X		TROMPETER
NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.	RoHS2 ☑ 2011/65/EU	Cage Code 14949	Title: CABLE ASSEMBLY, METRIC, TRB PLUG TO TRB PLUG
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	3RD ANGLE PROJECTION	Drawing No. C_21-20-MX.X Rev. 001
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018	△2	Drawn By: C. MONAHAN Date: 10/15/2020	SIZE B DO NOT SCALE DRAWING; Workmanship Std: SEE NOTES; SHEET 1 OF 1

Please read our datasheet & drawing disclaimer here.