TABLE 1		
MODEL NUMBER	"L"	MARKER 5
21–20–12	12	21–20–12 14949 ######
21–20–24	24	21–20–24 14949 ######
21–20–36	36	21–20–36 14949 ######
21–20–60	60	21–20–60 14949 ######
21–20–72	72	21–20–72 14949 ######
21–20–120	120	21–20–120 14949 ######
21–20–240	240	21–20–240 14949 ######

WIRING SCHEMATIC



REV	ECO	DATE
001	57433	11/22/2019

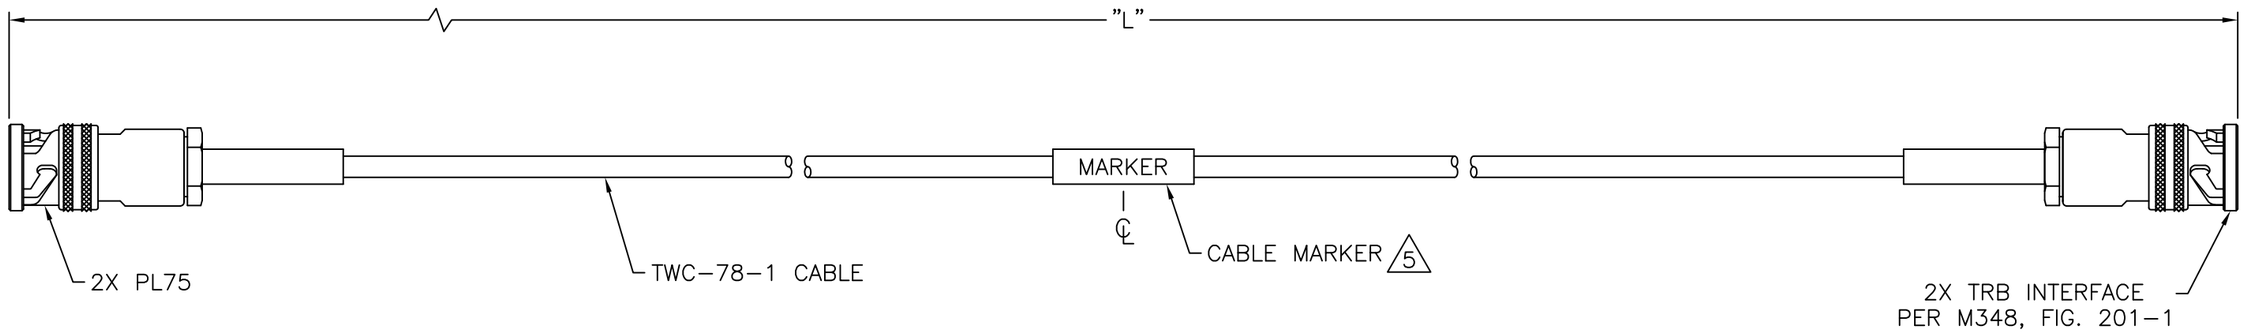

NOTES: UNLESS OTHERWISE SPECIFIED.

1. WORKMANSHIP PER IPC/WHMA–A–620, CLASS 3, SECTION 13.

2. TOLERANCE PER IPC/WHMA–A–620, SECTION 11.1

3. TESTING:
   3.1 CONTINUITY
   3.2 DWV: 400 VRMS

4. BEND RADIUS (MIN): 1.5

5. MARKERS:
   5.1 MARKER PER TABLE 1.
   5.2 ###### = LOT CODE

This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is no traced or copied without permission and is returnable upon demand.

INTERPRET DRAWING ACCORDANCE WITH ASME Y14.5–2009.

Model No. 21–20

RoHS2 2011/65/EU

Cage Code 14949

3RD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED UNITS: INCH

2

Drawn By: M. Souriphong

Date: 11/25/2019

TROMPETER

Title: CABLE ASSEMBLY, TRB PLUG TO TRB PLUG

Drawing No. C_21–20

Rev. 001

SIZE B | DO NOT SCALE DRAWING | Workmanship Std: SEE NOTES | SHEET 1 OF 1

Please read our datasheet & drawing disclaimer here.