



Part	Description	Diameter
1 – Center Conductor	Silver Plated Copper- Solid	0.011" +/- 0.001
2 – Dielectric	Microporous PTFE Tape	0.033" (nominal)
3 – Outer Conductor	Silver Plated Copper Flat Braid	0.039" (nominal)
4 – Shield	Silver Plated Copper Round Braid	0.049" (nominal)
5 – Jacket	Extruded FEP	0.060+/- .003"

VSWR	1.20 : 1
Impedance	50 +/- 2 ohms
Velocity of Propagation	75% Nominal
Delay	1.25 ns/ft
Capacitance	32pF
Maximum Frequency	18Ghz

Freq(GHz)	1	3	6	9	12	18
Attenuation(dB/Ft)	0.384	0.670	0.956	1.180	1.370	1.693

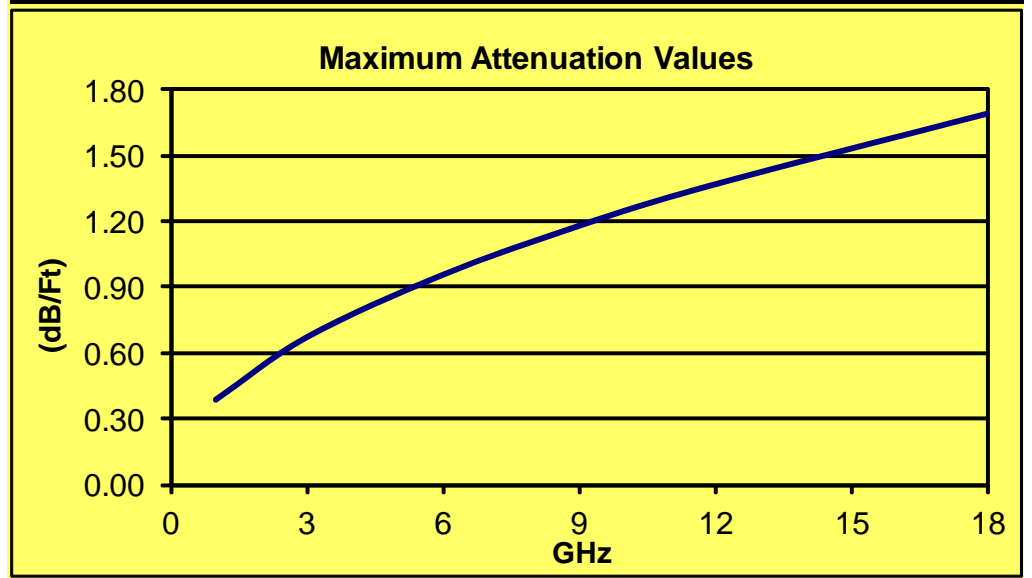

CABLE OVERVIEW

	PRODUCT LINE		SEMIFLEX	
	DESCRIPTION			
FSW060-EF Cable, 25ft length				
DATE	8/24/18	SIZE	A	RoHS COMPLIANT
DRAWN BY		DOCUMENT	FSW060-EF-L25	
REVISED		Form#	1327 Rev. 1	SHEET