
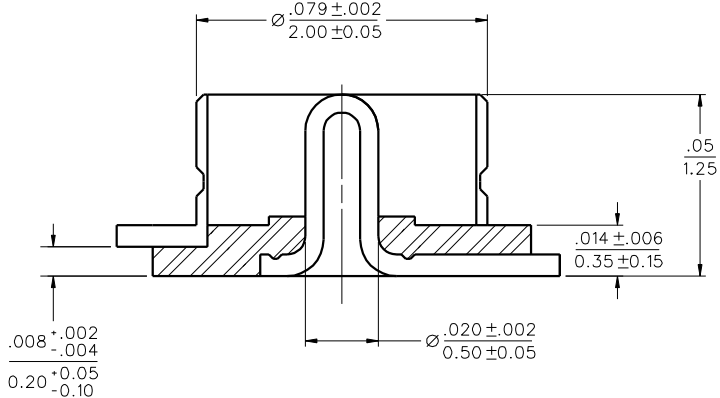
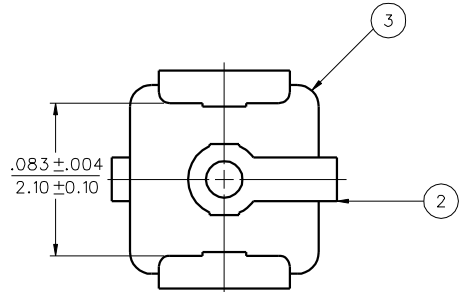



PART NUMBER	ITEM ① BODY	ITEM ② CENTER CONTACT	ITEM ③ INSULATOR	PACKAGING
128-0711-201	BRASS GOLD PLATED	BRASS GOLD PLATED	LCP	TAPE AND REEL 2500 PCS. PER FIG 1

REV	ECO	DATE
1A	50928	5-23-07
2		06/08/2021

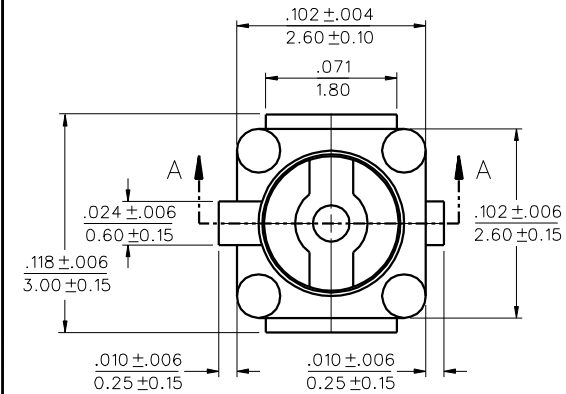

SECTION A-A
40:1



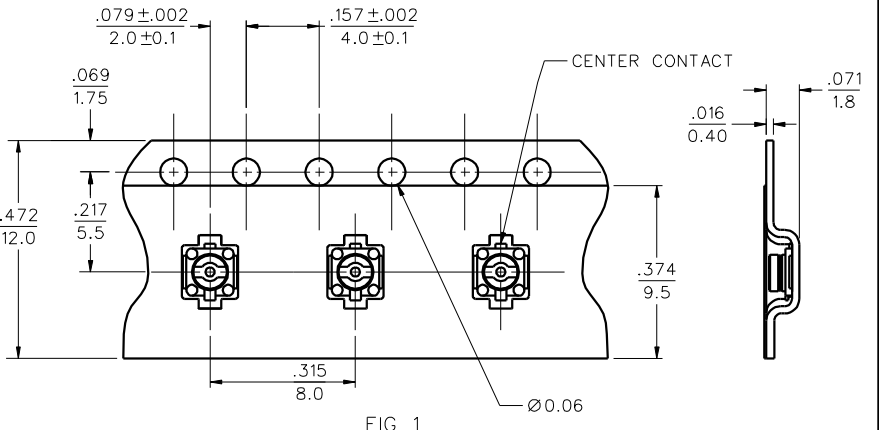


FIG 1
5:1

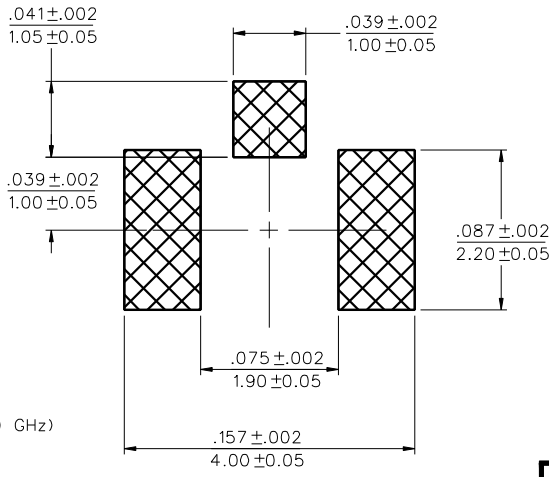

RECOMMENDED PCB PATTERN

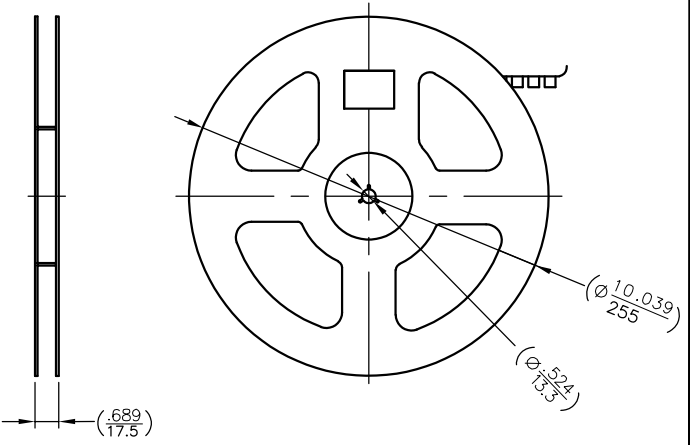

- NOTES:
- ELECTRICAL SPECIFICATIONS
 IMPEDANCE: 50 OHMS NOMINAL
 FREQUENCY RANGE: 0-6 GHz
 VSWR: 1.20 MAX (DC to 2.5 GHz), 1.3 MAX (2.5 GHz to 6 GHz)
 INSERTION LOSS: 0.1dB MAX (DC to 3.0 GHz), 0.15 MAX (3.0 GHz to 6.0 GHz)
 WORKING VOLTAGE: 100 Vrms MAX AT SEA LEVEL
 DIELECTRIC WITHSTANDING VOLTAGE: 300 Vrms MIN AT SEA LEVEL
 CONTACT RESISTANCE: 100 MILLIOHMS MAX
 INSULATION RESISTANCE: 1000 MEGOHMS MIN
 - MECHANICAL SPECIFICATIONS
 DURABILITY: 500 CYCLES MIN
 - ENVIRONMENTAL SPECIFICATIONS
 TEMPERATURE RANGE: -40° C to +90° C

This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.	Model No:	128-0711-201/210	JOHNSON	
	RoHS ☒ (EU)/2015/863 COMPLIANT	Cage Code	Title: UMC RECEPTACLE	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	3RD ANGLE PROJECTION	Drawing No.	REV.
	.XXX± .XXXX± ANGLES±	Drawn by: TOMMY REN Date: 06/08/2021	128-0711-201/210	2
		Size B	DO NOT SCALE DRAWING	Workmanship Std: NONE
				Sheet 1 OF 1