


ASSEMBLY MODEL NO.	CABLES ACCOMMODATED	ASSEMBLE PER
5-0015-201	M17/176-00002	TAI-143
5-0015-204	10602, RAYCHEM	
5-0015-221	10614, RAYCHEM	
5-0015S-201	M17/176-00002	
5-0015S-222	10613, RAYCHEM	

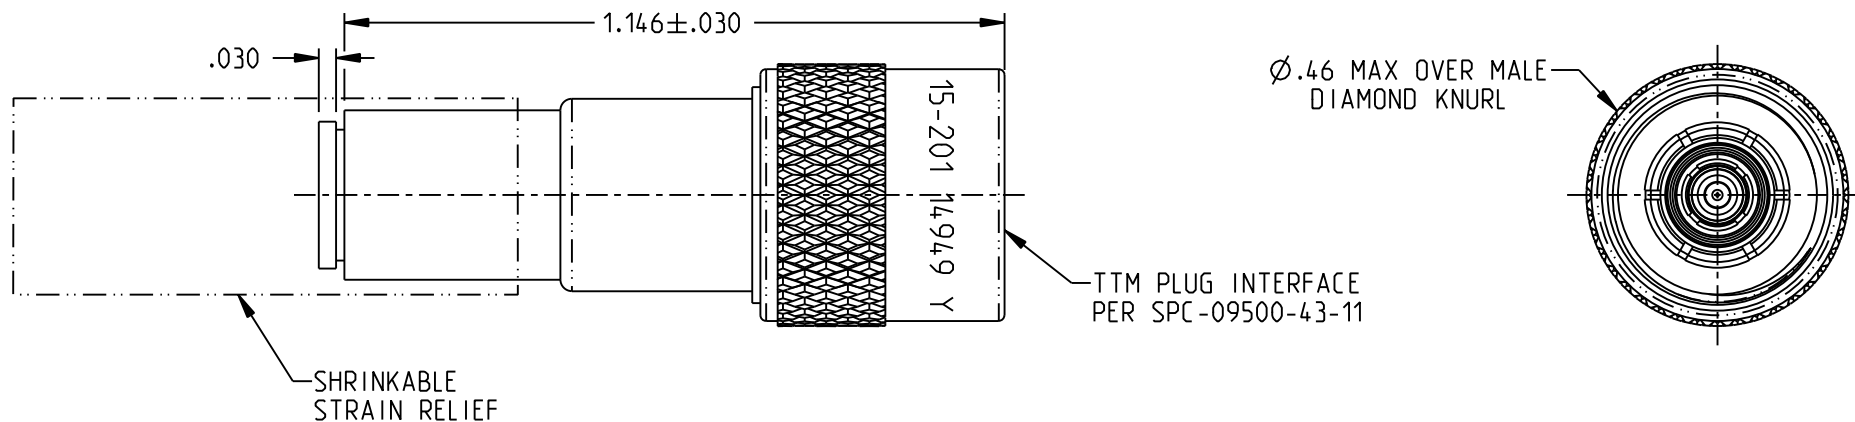

NOTES: UNLESS OTHERWISE SPECIFIED.

1. MATERIAL & FINISH:

- 1.1 BODY: NICKEL PLATED BERYLLIUM COPPER
- 1.2 COUPLING SLEEVE & CRIMP BUSHING:
NICKEL PLATED BRASS
- 1.3 INSULATOR & DIELECTRIC: PTFE (TEFLON)
- 1.4 INTERMEDIATE CONTACT: GOLD PLATED
BERYLLIUM COPPER
- 1.5 CENTER CONTACT: GOLD PLATED BRASS
- 1.6 GASKET: SILICONE RUBBER


2. ELECTRICAL:

- 2.1 FREQUENCY (MAX): 500 MHz
- 2.2 IMPEDANCE: NON-CONSTANT

3. TESTED PER TT-09 I.A.W. TCS-150

4. EXAMPLE OF COMPLETE MODEL NUMBER:

5-0015 A -XXX
 └─ CABLE GROUP (SEE TABLE)
 └─ S = SAFETY WIRE AS REQUIRED
 └─ BASE MODEL NUMBER

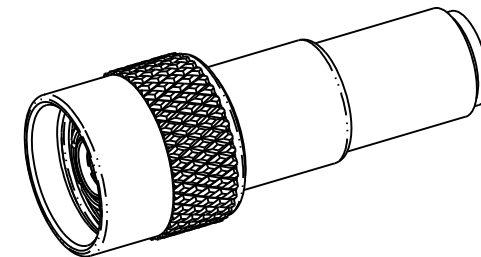

		3RD ANGLE PROJECTION		TROMPETER	
NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.		RoHS2 ☒ 2015/863/EU UNLESS OTHERWISE SPECIFIED UNITS: INCH		Title: TTM CABLE PLUG, TOOL CRIMP	
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018		Model No. 5-0015A-XXX Size A		Date: 3/11/2022	
		DO NOT SCALE DRAWING		Sheet 1 OF 1	