


MODEL NO.	CABLES ACCOMMODATED	ASSEMBLE PER
5-0219-201	M17/176-00002	TAI-143
5-0219-202	TWC-78-1	
5-0219-203	TWC-124-1A	
5-0219-204	10602, RAYCHEM	
5-0219-205	TWAC-78-1F2	
5-0219-206	782600130, RAYCHEM	TAI-167
5-0219-207	83310 BELDEN	TAI-143
5-0219-208	202-3927 MICRODOT	
5-0219-209	202-3942-MICRODOT	TAI-167
5-0219-210	8451 BELDEN	TAI-144
5-0219-211	202-3934 MICRODOT	
5-0219-212	2524E0114, RAYCHEM	
5-0219-213	TWC-78-2	
5-0219-214	TWC-124-2	
5-0219-215	BL-982 TIMES	TAI-143
5-0219-216	BL-1242 TIMES	
5-0219-217	GC875TM24H, GRUMMAN	
5-0219-218	EPD221888, RAYCHEM	
5-0219-219	252601114, RAYCHEM	
5-0087-220	GC875RR1, GRUMMAN	TAI-144
5-0219-221	10614, RAYCHEM	
5-0219-222	10613, RAYCHEM	
5-0219-223	HMS2-1149, HUGHES	
5-0219-224	TWC P-124-3	
5-0219-225	PS665PL- PRIME STOCK	

REV	ECO	DATE
001	57020	05/16/2024
002	59243	09/11/2024

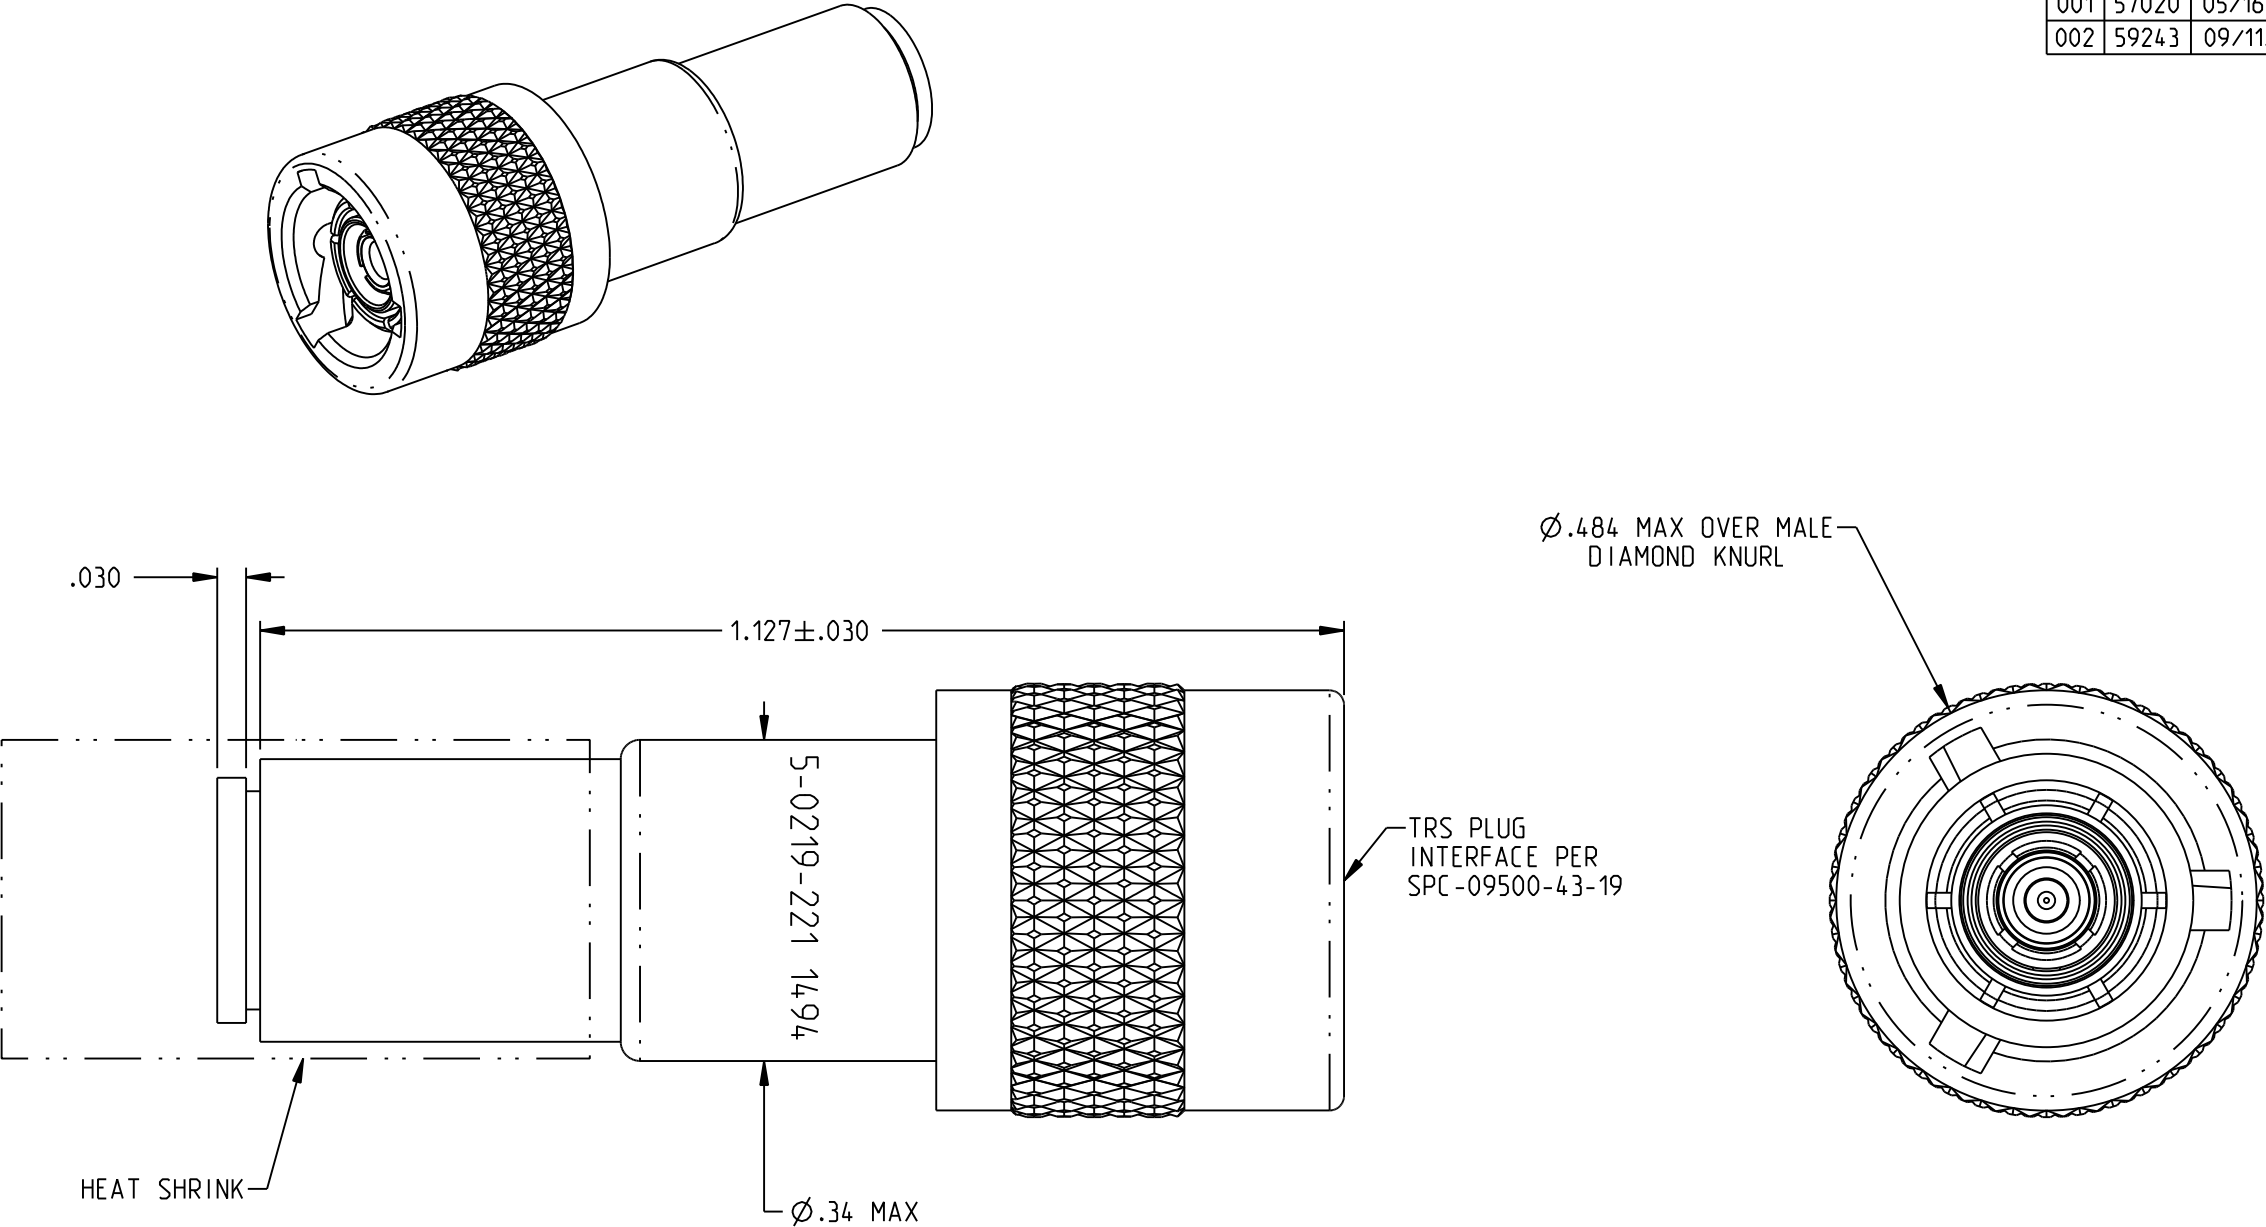

NOTES: UNLESS OTHERWISE SPECIFIED.

- MATERIAL & FINISH:
 - BODY, BAYONET SLEEVE & CRIMP BUSHING: NICKEL PLATED BRASS
 - INSULATOR & DIELECTRIC: PTFE (TEFLON)
 - INTERMEDIATE CONTACT: GOLD PLATED BERYLLIUM COPPER
 - CENTER CONTACT: GOLD PLATED BRASS
 - GASKET: SILICONE RUBBER
 - HEAT SHRINK: PVDF
- ELECTRICAL:
 - FREQUENCY (MAX): 500 MHz
 - IMPEDANCE: NON-CONSTANT
- ASSEMBLE PER TABLE
- WHEN TESTED PER ASTM E595:
 - TOTAL MASS LOSS (TML): LESS THAN 1.0%
 - COLLECTED VOLATILE CONDENSED MATERIALS (CVCM): LESS THAN 0.10 %
- TESTED TO TT-09 I.A.W. TCS-150

 NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018	Model No:	5-0219-XXX	Title: TROMPETER	
	RoHS2	2011/65/EU	Cage Code	14949
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	.XX ±.02	3RD ANGLE PROJECTION	ENGINEER: A. PETERS
	ANGLES ±2°	.XXX ±.010	Date:	09/11/2024
Drawing No.		C_5-0219		REV. 002
Size	B	DO NOT SCALE DRAWING	Workmanship Std TFS-10	Sheet 1 OF 1