PART NUMBER	ITEM ① SHROUD BODY	ITEM ② INSULATOR	ITEM ③ PIN
127-2711-601	KOVAR GOLD PL .00005 MIN OVER NICKEL PL	GLASS, CORNING 7070 OR EQUIVALENT	KOVAR GOLD PL .00005 MIN OVER NICKEL PL

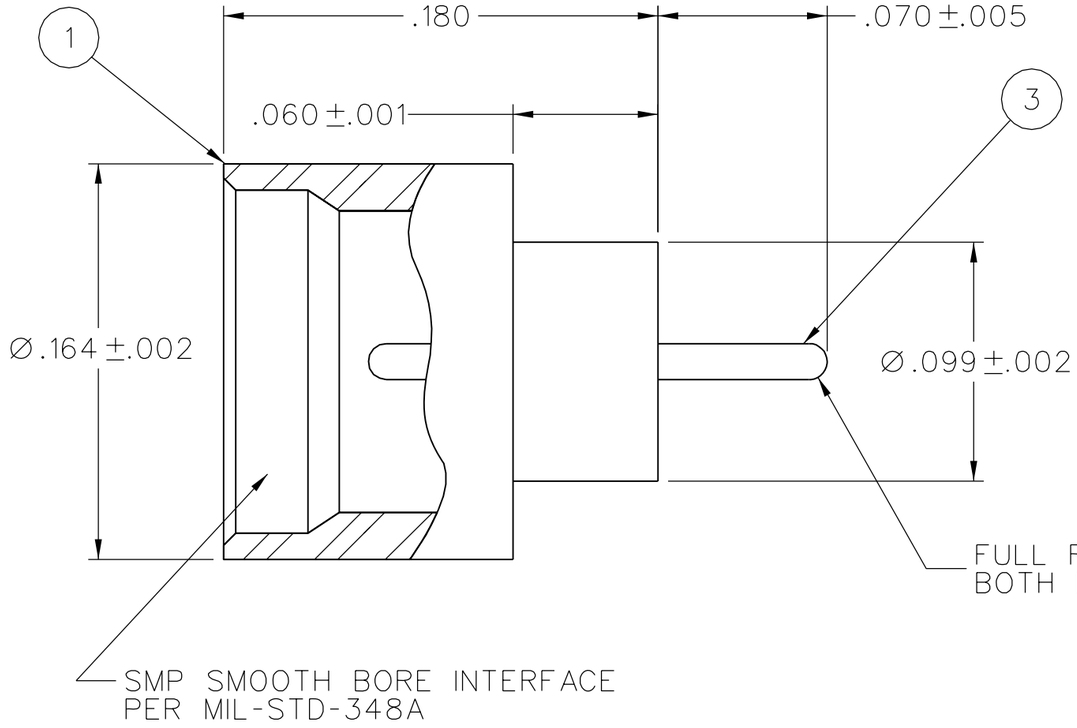

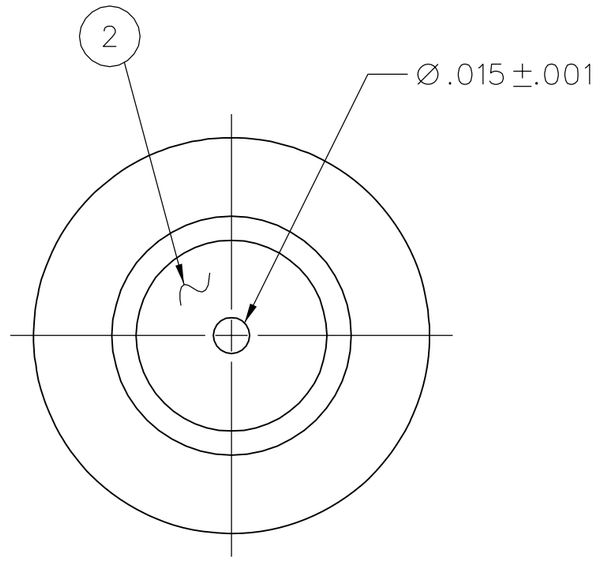

NOTES:

1. SPECIFICATIONS:

   ELECRICAL:

   IMPEDANCE: 50 OHMS NOMINAL
   FREQUENCY RANGE: DC TO 18 GHZ
   VSWR: DEPENDANT ON APPLICATION

   ENVIRONMENTAL:

   HERMETICITY: 1×10^{-8} cc/sec AT ONE ATMOSPHERE
   SOLDERABILITY: MEETS REQUIREMENTS OF MIL-STD-202G, TEST METHOD 208H.
   OPERATING TEMPERATURE: -55 DEG C TO +165 DEG C

DRAWING NO.
B - 127-2711-601/610

0	REVISIONS							
ENGINEERING RELEASE								
1	1-4-07	PAT	JRK	JCN			1-18-07 ECN 50862	

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED PER ASME Y 14.5M - 1994

"μSTATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE
DECIMALS	mm	PAT	11-21-06
.XX ———	———	CHECKED BY	DATE
.XXX ±.003	———	JRK	1-18-07
MATL ———		APPROVED BY	DATE
		JCN	1-18-07
FINISH ———		RELEASE DATE	1-18-07
		U/M INCH	SCALE 15:1

cinch CONNECTIVITY SOLUTIONS a bel group
Cinch Connectivity Solutions
P.O. Box 1732
Waseca, MN 56093
1-800-247-8256

TITLE
SMP SMOOTH BORE
STRAIGHT FEEDTHRU SHROUD
HERMETIC SEALED PIN CONTACT

SHEET	DRAWING NO.
2 OF 2	B - 127-2711-601/610

Please read our datasheet & drawing disclaimer here.