MODEL NO.	PACKAGING
145-0701-212	ONE PCS PER BAG

REV	ECO	DATE
001	ECO-19-0022	06/26/2019

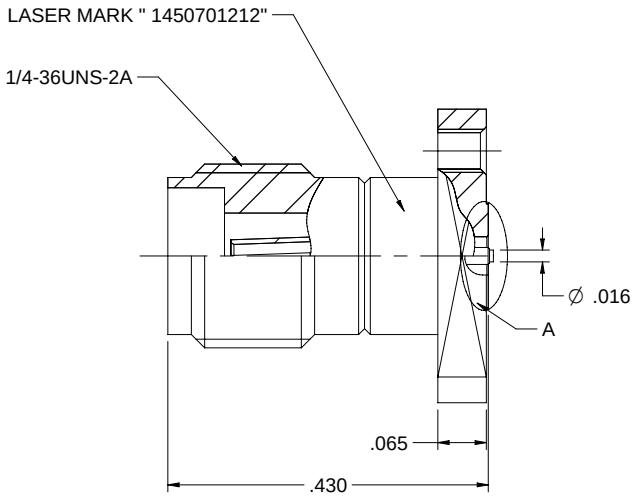

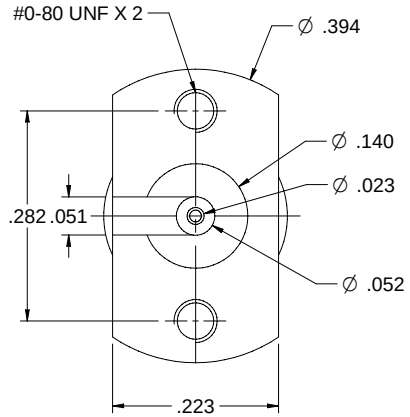

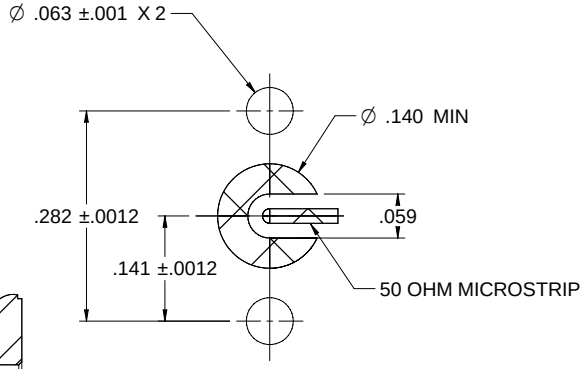

RECOMMENDED MOUNTING PATTERN



DETAIL A (10/1)

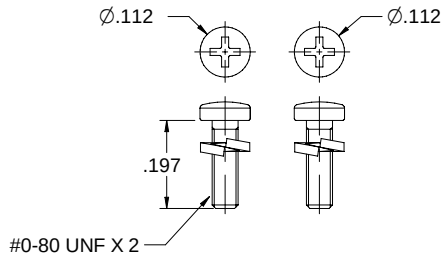

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL & FINISH:
   1.1 BODY: PASSIVATED STAINLESS STEEL
   1.2 CONTACT PIN: GOLD PLATED BERYLLIUM COPPER
   1.3 INSULATOR: PTFE, WHITE
   1.4 WASHER: STAINLESS STEEL
   1.5 BOLT: SUS302

2. ELECTRICAL:
   2.1 IMPEDANCE: 50 OHMS
   2.2 FREQUENCY RANGE: DC-40 GHz
   2.3 VOLTAGE STANDING WAVE RATIO: 1.35 MAX
   2.4 DIELECTRIC WITHSTANDING VOLTAGE: 750 VRMS MIN
   2.5 CONTACT RESISTANCE:
      2.5.1 CENTER CONTACT: 3 MILLIOHMS MAX
      2.5.2 OUTER CONTACT: 2 MILLIOHMS MAX
   2.6 INSULATOR RESISTANCE: 5000 MEGOHM MIN

3. MECHANICAL:
   3.1 ENGAGEMENT AND DISENGAGEMENT FORCE: 0.23 MN MAX
   3.2 CONTACT RETENTION: 22 N MIN
   3.3 DURABILITY: 500CYCLES MIN

4. ENVIRONMENT:
   4.1 OPERATING TEMPERATURE: -55 TO 125°C
   4.2 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B.
   4.3 SHOCK: MIL-STD-202, METHOD 213, CONDITION I
   4.4 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
   4.5 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106
   4.6 SALT SPRAY: MIL-STD-202, METHOD 101, CONDITION B

1. BOARD THICKNESS: 1.57-2.79mm

THIS PROPRIETARY Document is property of Cinch Connectivity Solutions and is loaned subject to return, non-reproduction, and understanding that it is not to be disclosed to others for purposes not consistent with written authorization of Cinch Connectivity Solutions. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.

Model No.	145-0701-211/220		Johnson
RoHS2 2011/65/EU	Cage Code		Title: JACK, PCB, COMPRESSION MOUNT,SIDE GROOVE,2.92mm (SMK)
UNLESS OTHERWISE SPECIFIED: .XXX ±.02 .XXXX ±.01 ANGLES ±5°	3RD ANGLE PROJECTION		Drawing No. 145-0701-211/220 Rev. 001
	Drawn By: Betty.Yu		
	Date: 06/26/2019	Size C / DO NOT SCALE DRAWING	Workmanship Std: NONE / Sheet 1 of 1

Please read our datasheet & drawing disclaimer here.