PART NUMBER	ITEM ① BODY	ITEM ② CONTACT	ITEM ③ INSULATOR
145-0701-851	BRASS GOLD PL .00003 MIN OVER NICKEL PL.00005 MIN OVER COPPER	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL.00005 MIN OVER COPPER	TEFLON

REV	ECO	DATE
1	ECO-19-0008	3/28/2019
1A	ECO-19-0032	7/25/2019



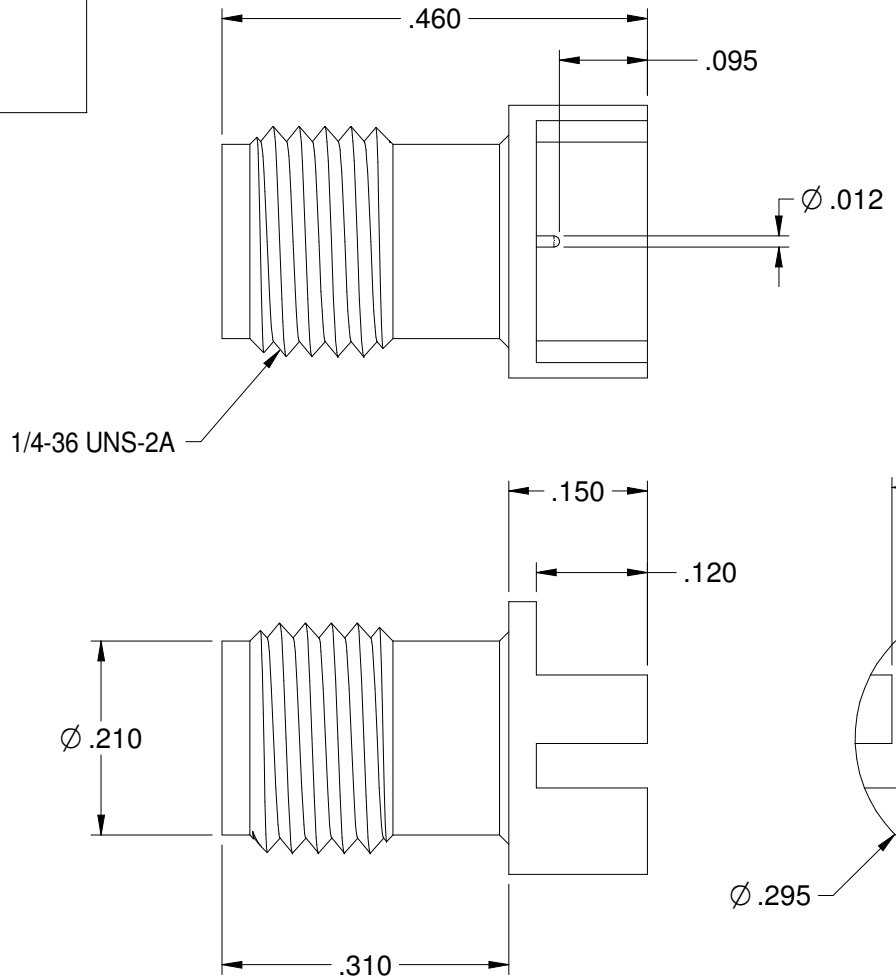

SPECIFICATION:

ELECTRICAL:
- IMPEDANCE: 50 OHMS
- FREQUENCY RANGE: 0-40 GHz
- VSWR: 1.5 MAX
- INSERTION LOSS: 0.05 √F dB MAX (F IN GHz)
- WORKING VOLTAGE: 250 VRMS MAX AT SEA LEVEL
- DIELECTRIC WITHSTANDING VOLTAGE: 1000VRMS MIN AT SEA LEVEL
- INSULATION RESISTANCE: 5000 MEGOHM MIN
- CONTACT RESISTANCE:
  - CENTER CONTACT - INITIAL 3 MILLIOHM MAX, AFTER ENVIRONMENTAL NOT APPLICABLE
  - OUTER CONDUCTOR - INITIAL 2 MILLIOHM MAX, AFTER ENVIRONMENTAL NOT APPLICABLE
- RF LEAKAGE: -90dB TYPICAL AT 2.5GHz

MECHANICAL:
- ENGAGEMENT/DISENGAGEMENT FORCE: 2 INCH-POUNDS MAX
- MATING TORQUE: 7 TO 10 INCH-POUNDS
- DURABILITY: 500 CYCLES MIN

ENVIRONMENTAL:
- OPERATING TEMPERATUR: -40 TO 85℃
- THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B
- CORROSION: MIL-STD-202, METHOD 101, CONDITION B
- SHOCK: MIL-STD-202, METHOD 213, CONDITION I
- VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
- MOISTURE RESISTANCE: MIL-STD-202, MEHTOD 106

cinch connectivity solutions a trel group

This PROPRIETARY Document is property of CINCH Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it will not be copied or disclosed without permission and is returnable upon demand.

INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009

Material: SEE NOTE
Finish: SEE NOTE
Workmanship Std:

Model No. 145-0701-851
RoHS2 2011/65/EU
Cage Code
UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ±.01 .XXX ±.003 .XXXX ±.0010 ANGLES ±1°00'
3RD ANGLE PROJECTION
Drawn by: R.SHEN
Date: 3/20/2019

JOHNSON

Title: 2.92mm END LAUNCH JACK FOR .042" BOARD
Drawing No. 145-0701-851
Rev. 1A
Size B
DO NOT SCALE DRAWING
Sheet 1 of 1

Please read our datasheet & drawing disclaimer here.