DASH NUMBER	MODEL NUMBER	IMPD OHMS
-1	BJ224	50
-2	UBJ224	75

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO EMERSON CONNECTIVITY SOLUTIONS AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION

REVISIONS

REV	DESCRIPTIONS	DATE	APPROVED
B	REVISED PER ECO 16588	9/22/09	LM

RED INDICATES ORIGINAL

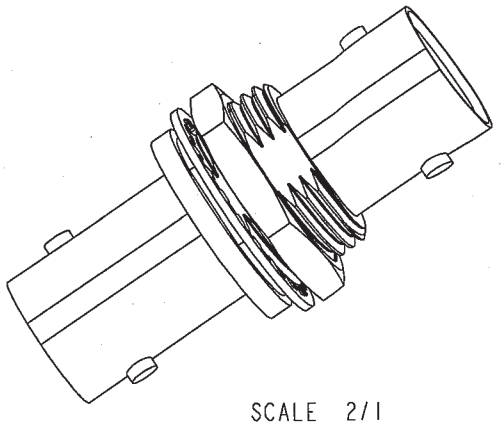

SCALE 2/1

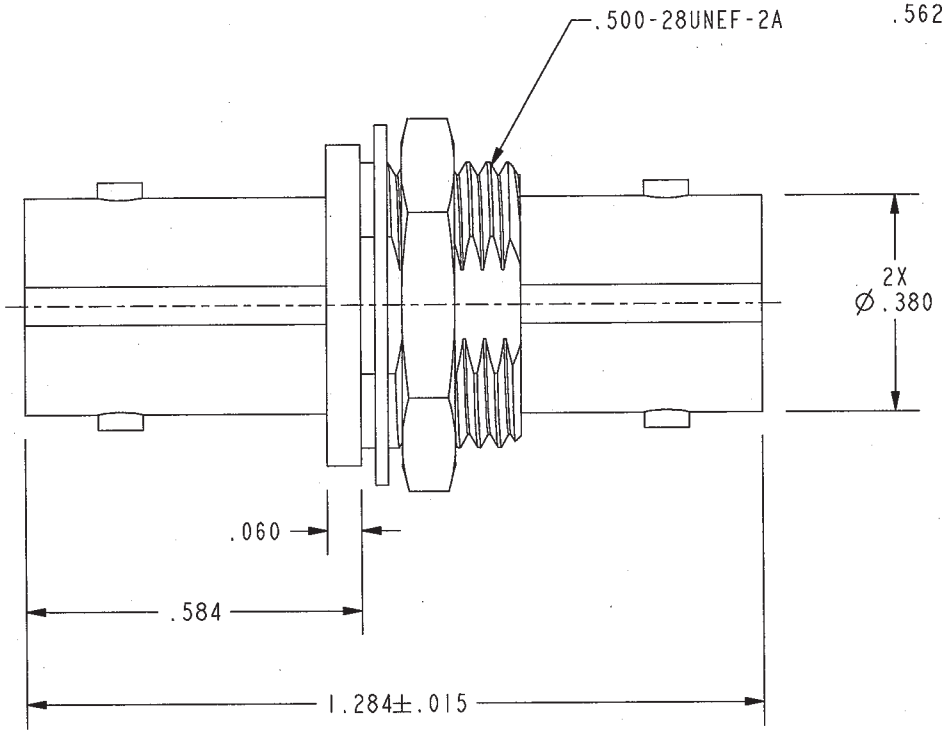

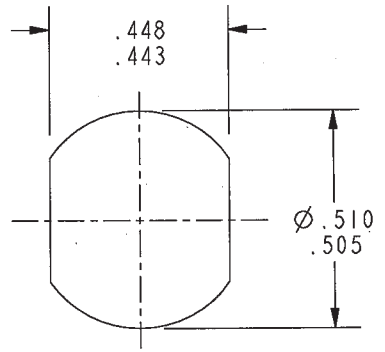

RECOMMENDED PANEL CUTOUT
SCALE 3/1

3. SOCKET CONTACT COAXIAL BNC TYPE NON-INSULATED FEED THRU BULKHEAD JACK, 50 AND 75 Ω VERSIONS

2. MAXIMUM PANEL THICKNESS: .156

1. FINISH: TFS-1A, (NICKEL)

NOTES: UNLESS OTHERWISE SPECIFIED.

INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED.

TOL: UNLESS SPECIFIED.
.XX ± .02
.XXX ± .010
ANGLE ± 1°

cinch CONNECTIVITY SOLUTIONS a bel group

Cinch Connectivity Solutions
299 Johnson Ave. Ste. 100
Waseca, MN 56093
1-800-247-8256

DRN	M JOHNSON	9-16-09
CHK	LM	9/16/09
QUALITY		
MANUF		
APPROVED	LM	9/16/09

MATERIAL:

FINISH:

TITLE: BJ224/UBJ224

SIZE	CAGE CODE	DRAWING NO.	REV.
A	14949	1-0590	B

NEXT ASSY	PRO/E FILE NO. 1-0590	DO NOT SCALE DWG	SCALE 3/1	DATE 10-11-00	SHEET 1C

Please read our datasheet & drawing disclaimer here.