


RED INDICATES ORIGINAL

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR REPRODUCTION OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVISIONS			1-0472	SH 1
REV	EQ	DESCRIPTION	DWN	APPROVED
V	10804	SH 2, -001 ITEM 40 WAS ITEM 29; SEE ECD	DKC	BW, JR

DASH NO	CABLES ACCOMMODATED	A HEX	ASSEMBLE PER
-001	RG-178, -198	.178	
-002	HEWLETT PACKARD 8120-1107	.107	
-003	RG-174, -188, -316	.178	
-004	RG-178, -187		
-005	NORTHERN ELECTRIC DBL-SHLD RG-188	.197	
-006	GRUMMAN-GC8750PT DBL-SHLD RG-187		
-007	275-3891 MICRODOT		
-008	RG-195, -180 421-111 ESSEX	.178	TAI-123
-009	8218 BELDEN YR23023 BELDEN 21-597 ESSEX		
-010	RG-122		
-011	RG-58, -141, -303 21-537 ESSEX	.213	
-012	RG-55, -142, -223 RG-400		
-013	RG-50		
-013A	TCC-75-2	.255	
-013B	RG-82		TAI-195
-014	8212 BELDEN		TAI-123
-015	730A AT&T	.280	
-015A	RG-71		TAI-185
-016	724 AT&T 8281 BELDEN	.324	
-017	RG-8	.344	
-018	8268 BELDEN		TAI-123
-019	8278 BELDEN	.255	
-020	8248 BELDEN	.280	
-021	88240 BELDEN	.213	
-022	88241, 88208 BELDEN	.255	TAI-198
-023	89108 BELDEN		
-024	89120 BELDEN	.280	
-025	734A, AT&T	.255	TAI-123
-026	735A, AT&T		
-027	XS18224LS, AT&T	.178	

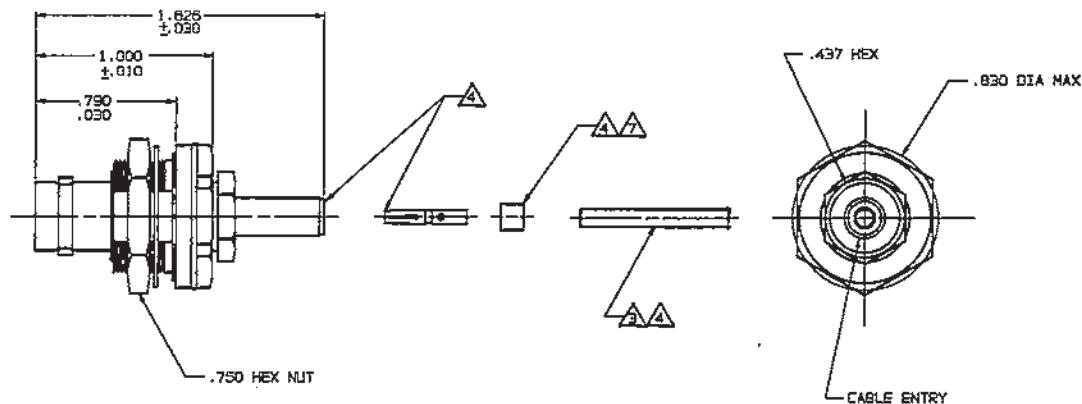

-001 SHOWN

INCH	MM
.005	0.13
.010	0.25
.030	0.76
.178	4.52
.187	4.75
.197	5.00
.213	5.41
.255	6.48
.281	7.14
.284	7.21
.290	7.37
.324	8.23
.344	8.74
.437	11.10
.630	16.00
.635	16.13
.750	19.05
.790	20.07
.830	21.08
1.000	25.40
1.625	41.30

FOR CABLE GROUP -011 SUPPLY 1 EA ACC011; FOR CABLE GROUPS -013, -013A & -013B SUPPLY 1 EA ACC013; MAY BE ASSEMBLED TO CABLE/CONNECTOR ASSY USING 3M SCOTCHGRIP NO. 1089 PLASTIC ADHESIVE OR EQUIV

IF PLASTIC STRAIN RELIEF REQUIRED, ADD SUFFIX "87" TO MODEL NO. (ONLY AVAILABLE WITH -011, -013, -013A & -013B)

CONTACT SUPPORT BUSHING REQUIRED ON -013B, -015A & -022 ONLY

B. MAX PANEL THK .187


RF COAXIAL BNC FULL CRIMP INSULATED BULKHEAD CABLE RECEPTACLE (EQUIV MIL-CAT "D")

CONTACT, SLEEVE, CRIMP SLEEVE & CONTACT SUPPORT BUSHING ARE SUPPLIED LOOSE


SLEEVE REQUIRED ON -001 THRU -007 AND -027 ONLY

2. FINISH: TFS-1A (NICKEL)

1. ALL DIM ARE IN INCHES



RECOMMENDED
PANEL CUTOUT



RECOMMENDED
HEX CRIMP

QTY	DESCRIPTION	PART NUMBER	ITEM
101 UNLESS SPECIFIED			
.001 ±.005			
.0002 ±.0002			
ANGLE ±			
DWN	DKC	8-17-84	
CHK	BW	8-22-87	
ENGR			
APPR	For	8/3/1994	
NEXT ASSY		SCALE 2/1	DATE 1/11/82
		SHEET 1 OF 2	

TROMPETER
RF connectivity

BJ228

MATERIAL CODE IDENT
14949

DRAWING NO.
1-0472

REV
V