DASH NO	MODEL NO	Ω
-1	BJ228	50
-2	UBJ228	75

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVISIONS

REV	DESCRIPTIONS	DATE	APPROVED
C	REVISED PER ECO 14093	6-6-01	YM.

RED INDICATES ORIGINAL

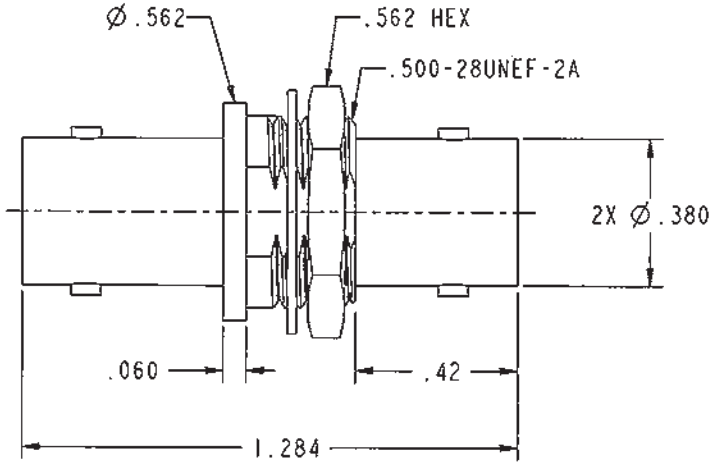





SCALE 1/1



RECOMMENDED PANEL CUTOUT
SCALE 1/1

3. SOCKET CONTACT COAXIAL BNC TYPE INSULATED FEED THRU BULKHEAD JACK, 50 AND 75 OHM VERSIONS
2. MAX PANEL THICKNESS: .156
1. FINISH: TFS-1Y (NICKEL)

NOTES: UNLESS OTHERWISE SPECIFIED.

INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED.

TOL: UNLESS SPECIFIED.
.XX ± .02
.XXX ± .010
ANGLE ± 1°

MATERIAL:

FINISH:

DRN JCM 6-5-01
CHK YM. 6/5/01
APPROVED YM. 6/5/01
PROFE FILE NO. 105-2057

NEXT ASSY

DO NOT SCALE DWG

TROMPETER RF connectivity
a cinch connectivity solutions brand

TITLE: BJ228/UBJ228

SIZE	CAGE CODE	DRAWING NO.	REV.
A	14949	105-2057	C

SCALE 2/1 DATE 6/13/00 SHEET 1C

Please read our datasheet & drawing disclaimer here.