


TABLE 1			
MODEL NO.	CABLES ACCOMMODATED	FIGURE	ASSEMBLE PER
BJ26-1	RG-58	1 & 3	TAI-101
UBJ26-1	621-715, ESSEX		
BJ26-2	RG-59		
UBJ26-2			
BJ26-2A	8279, BELDEN		
UBJ26-2A			
BJ26-2B	730A, W.E.CO.		
UBJ26-2B			
BJ26-3	RG-223		
UBJ26-3			
BJ26-3A	RG-55		
UBJ26-3A			
BJ26-4	RG-122		
UBJ26-4	8218, BELDEN		
BJ26-5	RG-174		
UBJ26-5	RG-187		
BJ26-5A	RG-196		
UBJ26-5A			
BJ26-5B	8120-1170, HEWLETT-PACKARD		
UBJ26-5B			
BJ26-21	RG-303		
UBJ26-21			
BJ26-22	RG-180		
UBJ26-22			
BJ26-31	GC875GP1, GRUMMAN		
UBJ26-31	RG-187, DBL SHLD		
BJ26-34	8228, BELDEN		
UBJ26-34			
BJ26-36	275-3991, MICRODOT 616-569, AMPEX		
UBJ26-36			
BJ26-37	810, RAYCHEM		
UBJ26-37			
BJ26-41	RG-304		
UBJ26-41	9248, BELDEN		
BJ26-44	B749, BRAND-REX C06C032, GORE		
UBJ26-44			
BJ26-53	89555, BELDEN		
UBJ26-53			
BJ26-63	734A, AT&T	1	
UBJ26-63			
BJ26-086	RG-405	2	TAI-130
UBJ26-086			
BJ26-141	RG-402		
UBJ26-141			

NOTES: UNLESS OTHERWISE SPECIFIED.



1. MATERIAL & FINISH:
- 1.1 BODY, ADAPTER, CLAMP NUT: NICKEL PLATED BRASS
BLACK NICKEL FOR BJ26-1-1AC
- 1.2 INSULATORS & DIELECTRIC: PTFE (TEFLON)
- 1.3 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
- 1.4 GASKET: SILICONE RUBBER
- 1.5 MOUNTING HARDWARE: NICKEL PLATED COPPER ALLOY
BLACK NICKEL FOR BJ26-1-1AC
- 1.6 SPRING: MUSIC WIRE WITH CLEAR EPOXY COATING

2. ELECTRICAL:
- 2.1 FREQUENCY (MAX): 500 MHz
- 2.2 IMPEDANCE: 50 OHM & 75 OHM WITH U PREFIX

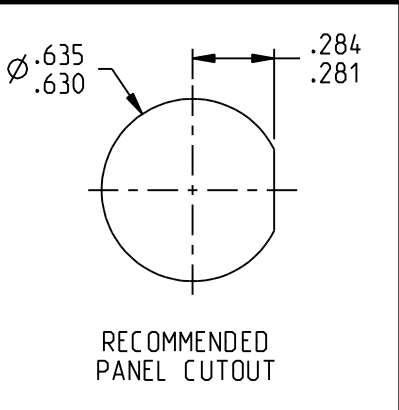

RECOMMENDED
PANEL CUTOUT

FIGURE 1
BJ26-1 SHOWN

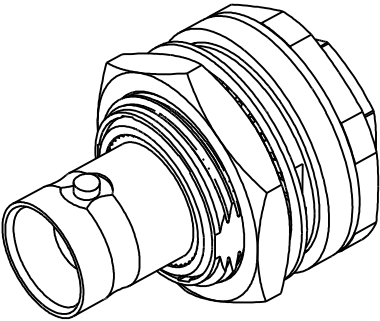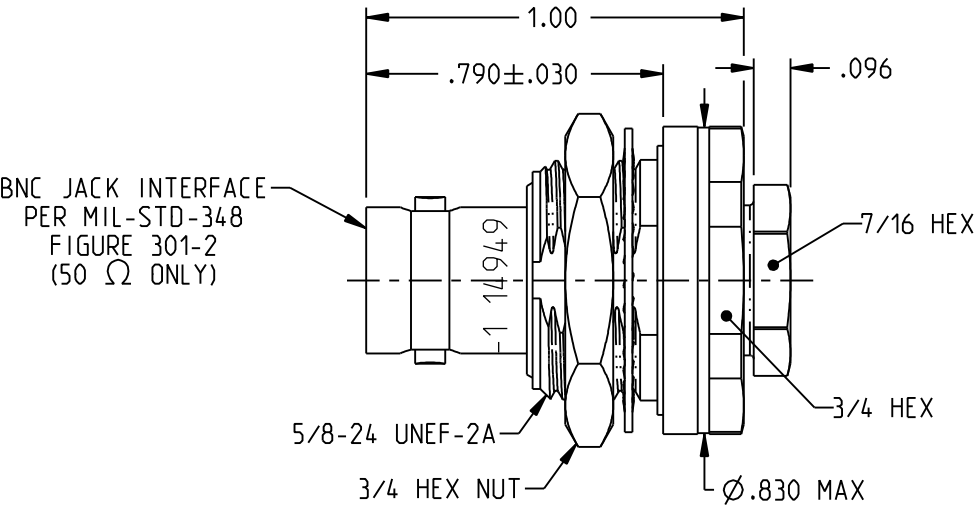

BJ26-1 SHOWN

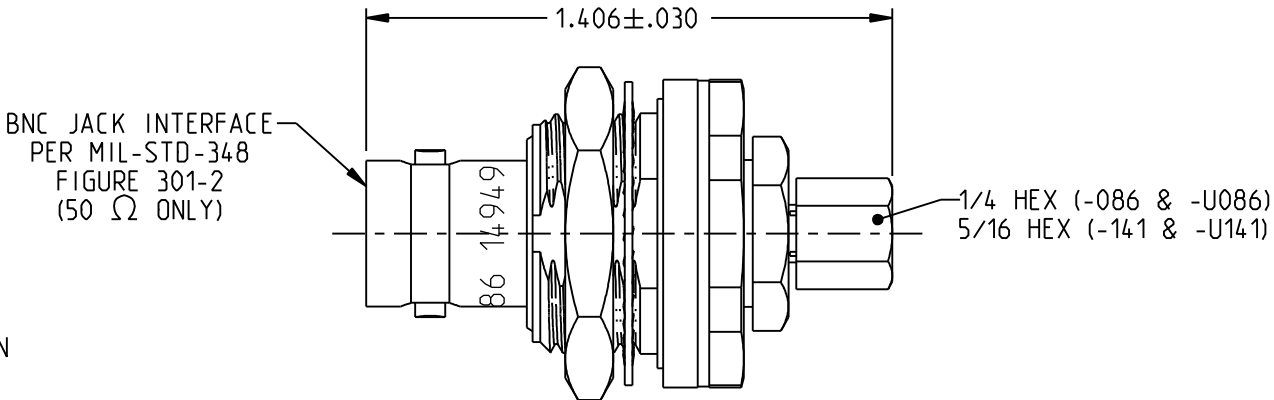


FIGURE 2
BJ26-086 SHOWN

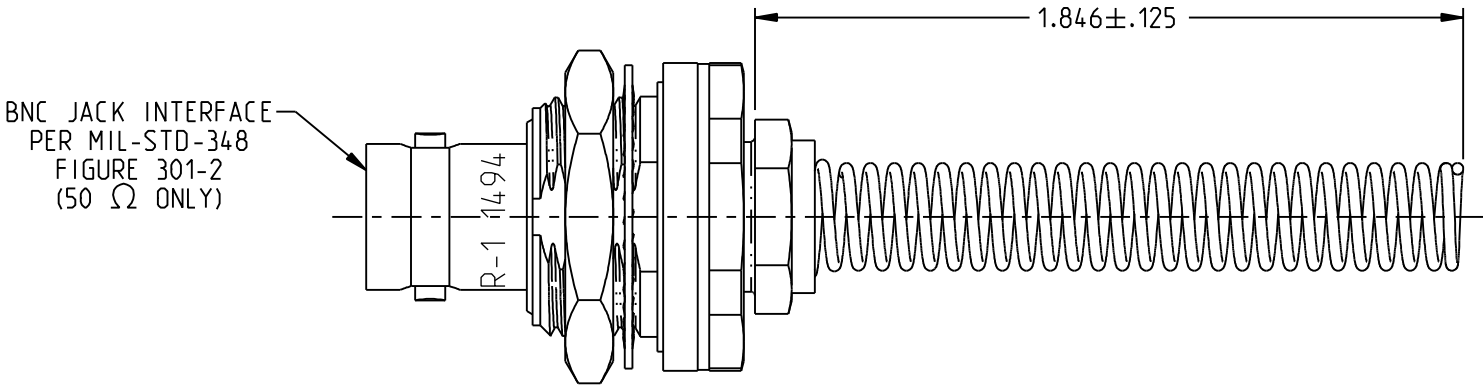


FIGURE 3
BJ26-1BR SHOWN

NOTES: CONT.

3. PANEL THICKNESS (MAX): .187
4. IF BEND RELIEF SPRING REQUIRED (FIG 3)
ADD SUFFIX "BR" TO MODEL NUMBER (NOT
AVAILABLE WITH CABLE GROUPS -63, -086,
& -141)

UNLESS NOTED DIMENSION
APPLY TO ALL MODEL NUMBERS

This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not to be traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.	RoHS2 ☒ 2011/65/EU UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ±.02 .XXX ±.010 ANGLES ±2°	TROMPETER	
		Title: BNC BULKHEAD CABLE JACK, INSUL, REAR MT, WRENCH CRIMP	
		Model No. XBJ26-XXXXX	
		Size B	DO NOT SCALE DRAWING