MODEL NUMBER	DESCRIPTION	SCREWS SUPPLIED	FIGURE
BJ3157F-2C	2 HOLE, Ø.103 CLEARENCE	—	1
BJ3157F-2T	2 HOLE, THREADED 3-56 UNF-2B	—	
BJ3157F-2CS	2 HOLE, Ø.103 CLEARENCE	PAN HEAD 3-56 X 5/16	
BJ3157F-2TS	2 HOLE, THREADED 3-56 UNF-2B	PAN HEAD 3-56 X 5/16	
BJ3157F-4C	4 HOLE, Ø.103 CLEARENCE	—	2
BJ3157F-4T	4 HOLE, THREADED 3-56 UNF-2B	—	
BJ3157F-4CS	4 HOLE, Ø.103 CLEARENCE	PAN HEAD 3-56 X 5/16	
BJ3157F-4TS	4 HOLE, THREADED 3-56 UNF-2B	PAN HEAD 3-56 X 5/16	





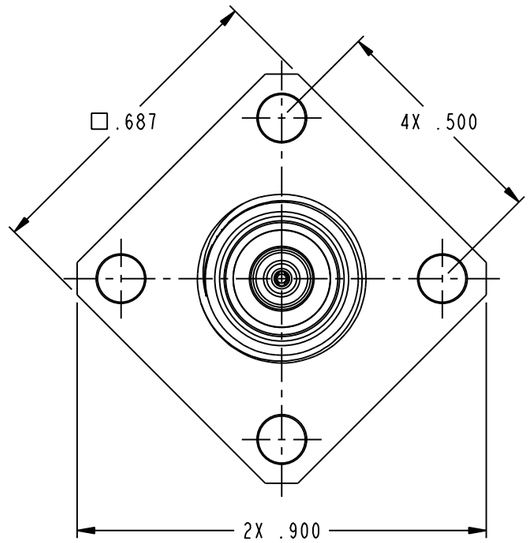

FIGURE 2
BJ3157F-4C SHOWN

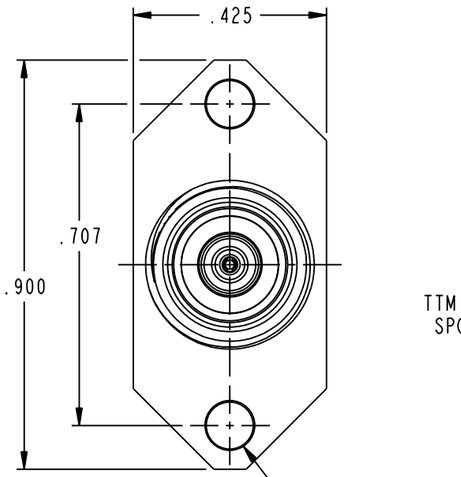

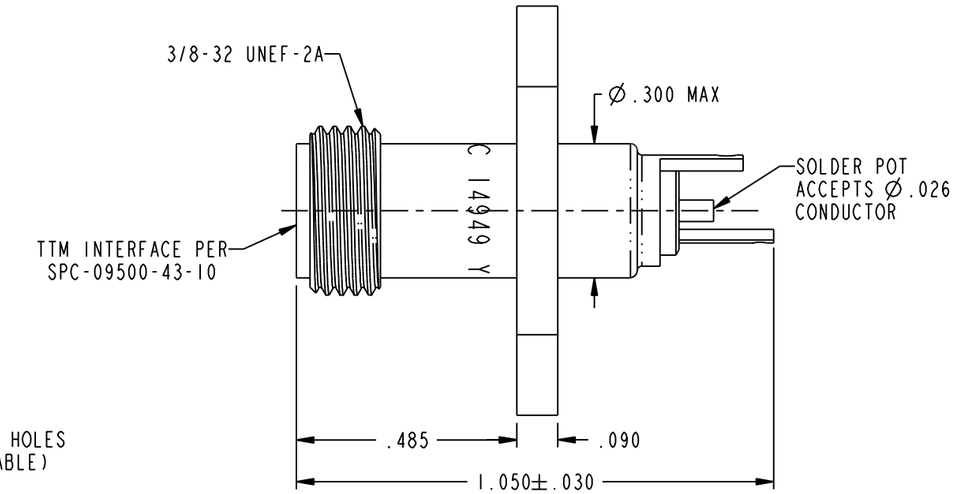

FIGURE 1
BJ3157F-2C SHOWN

NOTES: UNLESS OTHERWISE SPECIFIED.

1. MATERIAL & FINISH:
   1.1 BODY: NICKEL PLATED BRASS
   1.2 INSULATOR: PTFE (TEFLON)
   1.3 INTERMEDIATE CONTACT: GOLD PLATED BRASS
   1.4 DIELECTRIC: PTFE (TEFLON)
   1.5 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
   1.6 SCREWS: STAINLESS STEEL

2. ELECTRICAL:
   2.1 FREQUENCY (MAX): 500 MHz
   2.2 IMPEDANCE: NON-CONSTANT

3. PANEL THICKNESS (MAX): .187

4. EXAMPLE OF COMPLETE MODEL NUMBER:

BJ3157F- 2 C S
- BJ3157F- : BASIC PART NO.
- 2 : NUMBER OF HOLES
- C : C = CLEARANCE, T = THREADED
- S : INCLUDED PAN HEAD SCREW (OPTIONAL)

This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is no traced or copied without permission and is returnable upon demand.
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.

cinch CONNECTIVITY SOLUTIONS an IDEX group

3RD ANGLE PROJECTION

RoHS2 2011/65/EU

UNLESS OTHERWISE SPECIFIED UNITS: INCH
.XX ±.02
.XXX ±.010
ANGLES ±2°

TROMPETER

Title: TTM 2 OR 4 HOLE FLANGE MOUNT BULKHEAD JACK

Model No. BJ3157F-XXX

Size B | DO NOT SCALE DRAWING | Date: 6/29/2015 | Sheet 1 OF 1

Please read our datasheet & drawing disclaimer here.