RED INDICATES ORIGINAL

DASH NO	CABLES ACCOMMODATED	A DIM	B HEX	ASSEMBLE PER
-201	M17/176-00002	1.164	.255	TAI-143
-202	TWC-78-1			
-203	TWC-124-1A			
-204	10602,RAYCHEM			
-205	TWAC-78-1F2			
-206	7826D0130,RAYCHEM			
-207	83310 BELDEN	1.289	.344	TAI-167
-208	202-3927 MICRODOT	1.164	.255	TAI-143
-209	202-3942 MICRODOT			
-210	8451 BELDEN	1.289	.344	TAI-167
-211	202-3934 MICRODOT			TAI-144
-212	2524E0114,RAYCHEM			
-213	TWC-78-2			
-214	TWC-124-2			
-215	BL-982 TIMES			
-216	BL-1242 TIMES			
-217	GC875TM24H,GRUMMAN	1.164	.255	TAI-143
-218	EPD 22188B,RAYCHEM			
-219	2526D1114,RAYCHEM			
-220	GC875RR1,GRUMMAN			
-221	10614,RAYCHEM			
-222	10613,RAYCHEM			
-223	HMS2-1149,HUGHES			
-224	TWCP-124-3	1.289	.344	TAI-144
-225	PS685PL, PRIME STOCK			

DASH NO	CABLES ACCOMMODATED	A DIM	B HEX	ASSEMBLE PER
-301	GC875GC1,GRUMMAN	1.164	.255	TAI-157
-302	GC875GB1, GRUMMAN 5022E5111, RAYCHEM			
-303	7528A5314,RAYCHEM			
-304				
-305	M17/177-00001/295-3804 MICRODOT	1.289	.344	TAI-173
-306	TRC-50-2 M17/134-00002			
-307	TRC-75-1			TAI-198
-308	TRC-75-2			TAI-173
-309	TRC-50-1	1.164	.255	TAI-157

INCH	MM
.005	0.13
.030	0.76
.125	3.18
.187	4.75
.190	4.83
.255	6.48
.344	8.74
.438	11.15
.443	11.25
.500	12.70
.590	14.99
.600	15.24
1.00	25.40
1.164	29.57
1.25	31.25
1.289	32.74
1.75	44.45

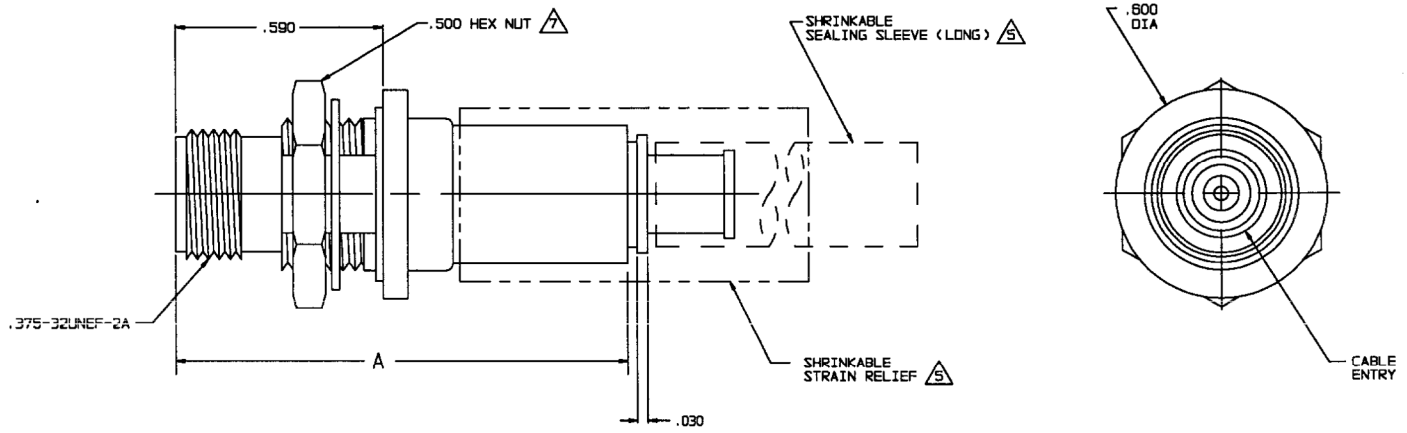

(5) 1 SHRINKABLE STRAIN RELIEF AND/OR SHRINKABLE SEALING SLEEVE SUPPLIED LOOSE AS FOLLOWS:

a. CABLE GROUPS -207, -210 & -307:

1 SHRINKABLE STRAIN RELIEF (1.00 LONG)
1 SHRINKABLE SEALING SLEEVE (1.25 LONG)

b. CABLE GROUPS -201 THROUGH -206, -208, -209, -217 THROUGH -223, -301, -302, -303 & -309

1 SHRINKABLE SEALING SLEEVE (1.25 LONG)

c. CABLE GROUPS -211 THROUGH -216, -305, -306 & -308

1 SHRINKABLE STRAIN RELIEF (1.75 LONG)

4. MAX PANEL THK .125

3. THREADED SUBMINIATURE CONCENTRIC TWINAX,(4 PIECE ASSY) AND TRIAX (6 PIECE ASSY) FULL CRIMP NONINSULATED BULKHEAD MOUNT RECEPTACLE

2. FINISH: TFS-1A (NICKEL)

1. ALL DIMENSIONS ARE IN INCHES

-207 SHOWN

(7) IF SAFETY WIRE TYPE REQUIRED ADD SUFFIX "S" TO MODEL NO (SAFETY WIRE NUT SIZE WILL BE .564)

6. EXAMPLE OF COMPLETE MODEL NO:

BJ3159AC S -201

BJ3159AC — BASIC MODEL NO
S — (7) SUFFIX "S" FOR SAFETY WIRE
-201 — CABLE GROUP DASH NO



RECOMMENDED PANEL CUTOUT
SCALE: NONE



RECOMMENDED HEX CRIMP
SCALE: NONE

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVISIONS					3-0234	SH 1
REV	ECO	DESCRIPTION	DWN	APPROVED	DATE	
L	12390	ADDED -224 & -225; SEE ECO	DBN	WM	4/15/98	

QTY	DESCRIPTION			PART NUMBER	ITEM
TOL UNLESS SPECIFIED .XX ±.03 .XXX ±.005 .XXXX± ANGLES±	TROMPETER ELECTRONICS, INC.			BJ3159AC/ BJ3159ACS	
DWN	DBN	4/11/98	MATERIAL	CODE IDENT	DRAWING NO.	REV
CHK	WM	4-17-98		14949	3-0234	L
ENGR						
NEXT ASSY	APPR		SCALE 4/1	DATE 5-31-85	SHEET 1 OF 2	

Please read our datasheet & drawing disclaimer here.