RED INDICATES ORIGINAL

| DISK # | DWG SIZE | |
|---|---|---|
| H10 | C | DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION. |

| REVISIONS | | | | | |
|---|---|---|---|---|---|
| REV | EO | DESCRIPTION | DWN | APPROVED | DATE |
| H | 9320 | -7,-23,-24A,-25A,-26,-32, -33,-42,-43,-56,-57,-59, -60,-64. ASSY INSTR WAS TAI-104 | DKC | B.M. | 5/29/91 |

3-0073 SH 1

| DASH NO | CABLES ACCOMMODATED | ASSEMBLE PER | A DIA |
|---|---|---|---|
| -7 | TRC-50-2/TRC-75-2 | TAI-189 | .274 |
| -9 | TWC-78-2/TWC-124-2 | TAI-102 | .285 |
| -23 | 250-3884,MICRODOT | TAI-189 | .183 |
| -24 | 202-3934,MICRODOT | TAI-102 | .191 |
| -24A | 9530A5117,RAYCHEM | TAI-189 | .200 |
| -25 | GEEIA,GERMANY | TAI-102 | .285 |
| -25A | 5021H5331,RAYCHEM | TAI-189 | .285 |
| -26 | 7028A5518,RAYCHEM | | .183 |
| -27 | 202-3927,MICRODOT | TAI-102 | .145 |
| -29 | TWC-78-1/TWC-124-1A | | .191 |
| -30 | 761A,W.E.CO/8441,BELDEN | | .235 |
| -32 | TRC-50-1 | TAI-189 | .191 |
| -33 | TRC-75-1 | | .217 |
| -42 | 21-204,ESSEX 4463,CONSOLIDATED | | .300 |
| -43 | 250-4044/250-4045 293-3930,MICRODOT | | .200 |
| -45 | M27500-22TE2T14 1100-66F,STANDARD | TAI-102 | .183 |
| -47 | M17/176-00002 | | .164 |
| -49 | TWAC-78-1F2 | | .132 |
| -55 | 89272,BELDEN | | .250 |
| -56 | GC8756C1,GRUMMAN | TAI-189 | .191 |
| -57 | GC8756B1,GRUMMAN | | |
| -58 | GC875TM24H,GRUMMAN | TAI-102 | .198 |
| -59 | GC875LNI,GRUMMAN | TAI-189 | |
| -60 | M17/177,THERMATICS 380-10045,BOEING | | .217 |
| -64 | 7528A5314,RAYCHEM | | .183 |

FIG 1 ⑤
-9 SHOWN

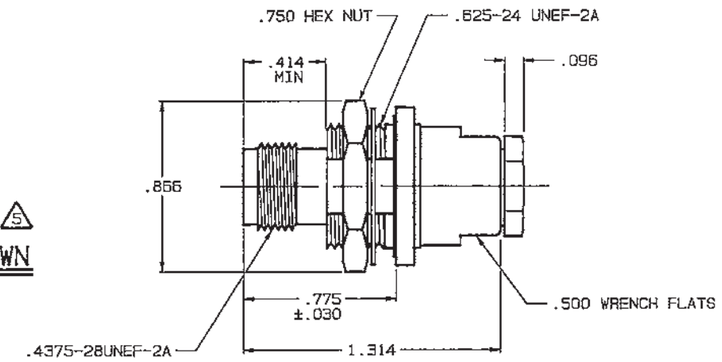


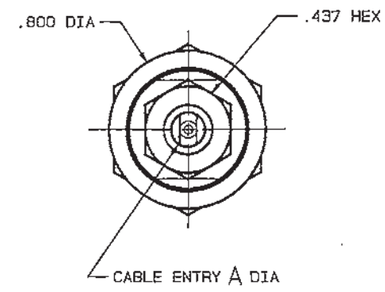


| INCH | MM | INCH | MM |
|---|---|---|---|
| .005 | 0.13 | .281 | 7.14 |
| .030 | 0.76 | .284 | 7.21 |
| .096 | 2.44 | .285 | 7.24 |
| .125 | 3.18 | .300 | 7.62 |
| .132 | 3.35 | .414 | 10.52 |
| .140 | 3.56 | .437 | 11.10 |
| .145 | 3.68 | .500 | 12.70 |
| .164 | 4.17 | .630 | 16.00 |
| .183 | 4.65 | .635 | 16.13 |
| .191 | 4.85 | .750 | 19.05 |
| .198 | 5.03 | .775 | 19.69 |
| .200 | 5.08 | .800 | 20.32 |
| .217 | 5.51 | .866 | 22.00 |
| .235 | 5.97 | 1.314 | 33.38 |
| .274 | 6.96 | 1.846 | 46.89 |

FIG 2 ⑤
-9 SHOWN

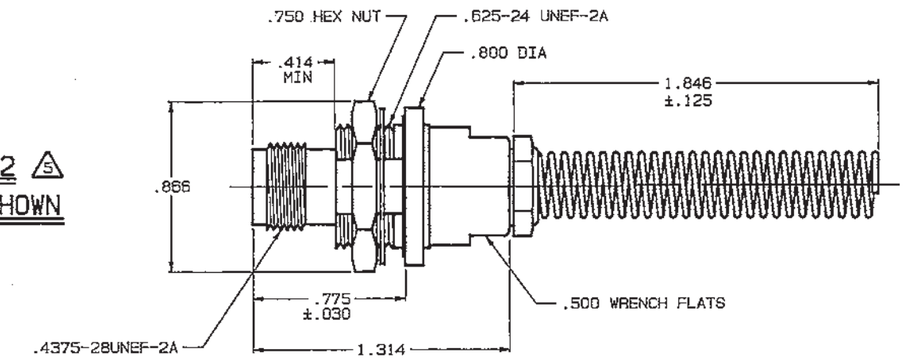





RECOMMENDED PANEL CUTOUT

⑤ IF BEND RELIEF SPRING REQUIRED (FIG 2) ADD SUFFIX "BR" TO MODEL NO

4. CONCENTRIC TWINAX/TRIAX INSULATED TRB BULKHEAD MOUNT CABLE RECEPTACLE
3. MAX PANEL THK .140
2. FINISH: TFS-1A (NICKEL)
1. ALL DIM ARE IN INCHES

| QTY | DESCRIPTION | | | PART NUMBER | ITEM |
|---|---|---|---|---|---|
| TOL UNLESS SPECIFIED .XX ± .XXX ± .005 .XXXX± ANGLES± | | | TROMPETER RF connectivity a cinch connectivity solutions brand | BJ374 | |
| DWN | DKC | 5-13-91 | MATERIAL | CODE IDENT | DRAWING NO. | REV |
| CHK | B.M. | 5-27-91 | ——— | 14949 | 3-0073 | H |
| ENGR | | | | | | |
| APPR | | | SCALE 2/1 | DATE 9-29-81 | SHEET 1 OF 2 | |

305-0515
NEXT ASSY

Please read our datasheet & drawing disclaimer here.