



MODEL NUMBER	"A"	"B"
BJ376	—	5/8
BJ376S	.042	11/16

REV	ECO	DATE
G	11466	1/17/1996
H	13617	11/7/2000
J	58988	6/27/2025

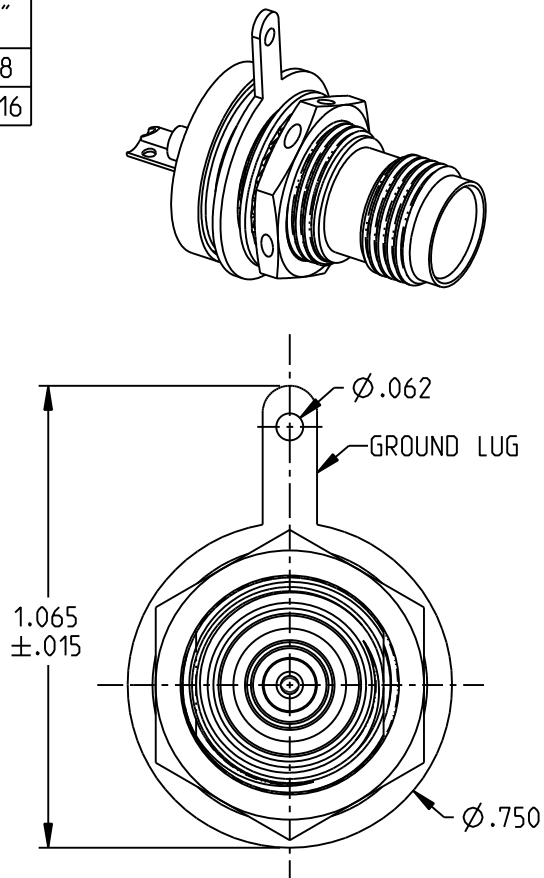

TRT JACK INTERFACE
PER MIL-STD-348
FIGURE 202-2

BJ376S SHOWN

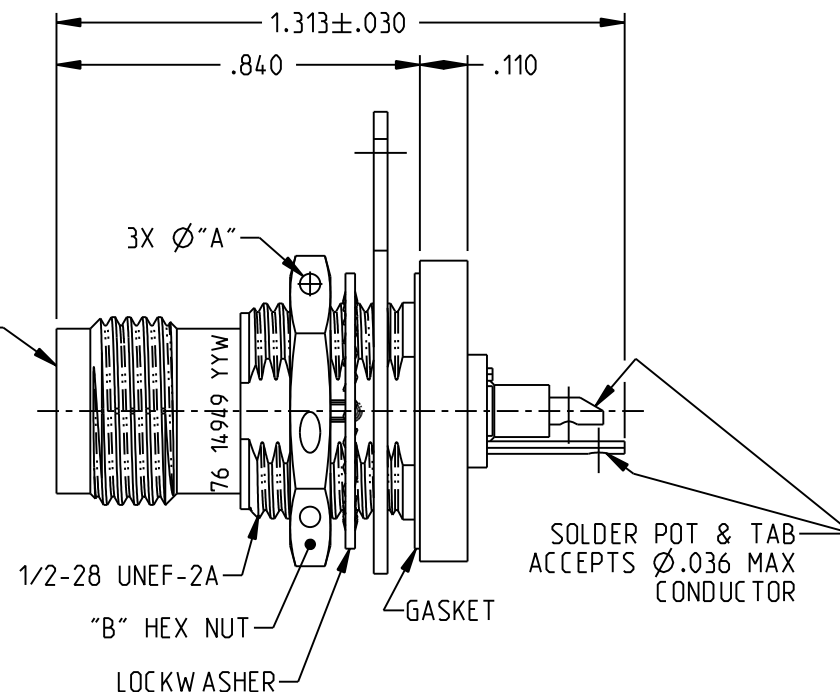

NOTES: UNLESS OTHERWISE SPECIFIED:

1. MATERIAL & FINISH:


- 1.1 BODY: NICKEL PLATED BRASS
- 1.2 INSULATOR & DIELECTRIC: PTFE (TEFLON)
- 1.3 INTERMEDIATE CONTACT: GOLD PLATED BRASS
- 1.4 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
- 1.5 MOUNTING HARDWARE: NICKEL PLATED COPPER ALLOY
- 1.6 GASKET: SILICONE RUBBER

2. ELECTRICAL:

- 2.1 FREQUENCY (MAX): 500 MHZ
- 2.2 IMPEDANCE: NON-CONSTANT

3. PANEL NUT TORQUE (MAX): 35 INCH POUNDS

4. PANEL THICKNESS (MAX): .208

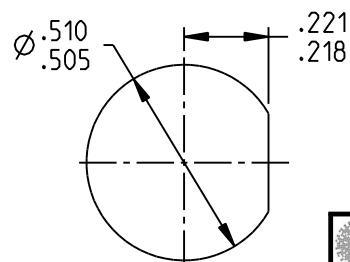

RECOMMENDED
PANEL CUTOUT

NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018	Model No:	BJ376X		TROMPETER	
	RoHS2	14949		Title: TRT BULKHEAD JACK, SOLDER POT, REAR MOUNT	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	ENGINEER: C. MONAHAN		Drawing No. 3-0131	
	ANGLES ±2°	Date: 6/27/2025		Size A	REV. H