

RED IS ORIGINAL

DISK #
H 4

DWG
SIZE
C






DATA CONTAINED IN THIS DOCUMENT IS
PROPRIETARY TO TROMPETER ELECTRONICS INC.
AND SHALL NOT BE DISCLOSED, COPIED OR USED
FOR REPRODUCTION OR MANUFACTURE WITHOUT
EXPRESS WRITTEN PERMISSION.

REV		ED		DESCRIPTION	3-0117		SH 1
F		10049		PICTORIALLY CHANGED 1.00 FLARED SEALING SLEEVE TO STRAIGHT (1.25) LONG SEALING SLEEVE; GENERAL UPDATE	OWN	APPROVED	DATE
					DKC	<i>DKC</i>	12/15/92


DASH NO	MODEL NO	CENTER CONTACT/ INTMO CONTACT TYPE	FIG NO
-1	BJ459ACFLP	SOCKET/PIN	1
-2	BJ459ACFLS	PIN/SOCKET	
-3	BJ459ACPP	SOCKET/PIN	
-4	BJ459ACPS	PIN/SOCKET	2
-5	BJ459ACRP	SOCKET/PIN	
-6	BJ459ACRS	PIN/SOCKET	3
-7	BJ459ACWP	SOCKET/PIN	
-8	BJ459ACWS	PIN/SOCKET	4

CABLE GROUP NO	CABLES ACCOMMODATED	A DIM	B DIA	C HEX	ASSEMBLE PER
-201	M17-176-00002				
-202	TWC-78-1, TROMPETER				
-203	TWC-124-1A, TROMPETER				
-204	10B02 RAYCHEM				
-205	TWAC-78-1F2, TROMPETER				
-206	7826D0130, RAYCHEM				
-208	202-3927, MICRODOT				
-209	202-3942, MICRODOT				
-212	2524E0114, RAYCHEM	1.365	.334	.255	TAI-162
-217	0C875TM24H, GRUMMAN				
-218	EPD221888, RAYCHEM				
-219	2526D1114, RAYCHEM				
-220	0C875HR1, GRUMMAN				
-221	10B14, RAYCHEM				
-222	10B13, RAYCHEM				
-223	HMS2-1149, HUGHES				

INCH	MM
.003	0.08
.0050	0.13
.010	0.25
.030	0.76
.047	1.19
.071	1.80
.156	3.96
.2400	6.10
.255	6.48
.274	6.96
.278	7.05
.330	8.38
.334	8.48
.335	8.51
.43	10.92
.4375	11.11
.707	17.96
1.25	31.75
1.365	34.67

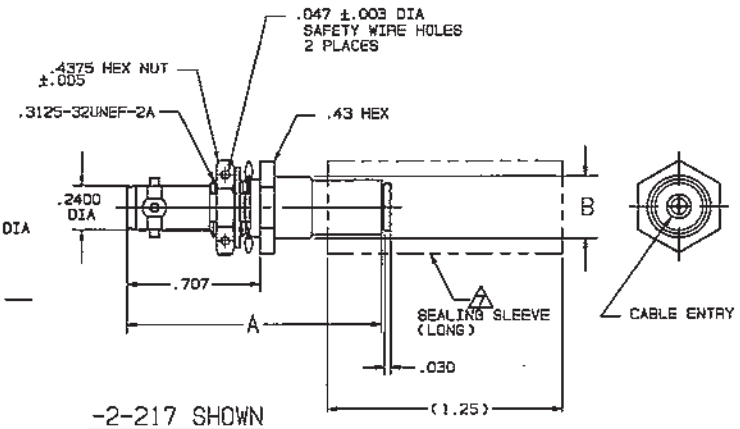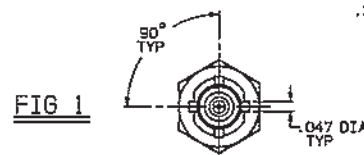

-2-217 SHOWN



SEALING SLEEVE & CRIMP BUSHING LOOSE WITH EACH CONNECTOR EXCEPT NOT USED ON -205, -208 & -223

6. EXAMPLE OF COMPLETE MODEL NO:
 BASIC MODEL NO (SEE TABLE 1) BJ459AC
 LUG POLARIZATION FL = 4-LUG, FIG 1
 P = 3-LUG, FIG 2
 R = 3-LUG, FIG 3
 W = 3-LUG, FIG 4
 CABLE GROUP NO (SEE TABLE 2) P - 201
 CENTER & INTERMEDIATE CONTACT TYPE (SEE TABLE 1)

5. EXAMPLE OF COMPLETE PART NO:
 BASIC PART NO 3-0117
 DASH NO (SEE TABLE 2) -1
 CABLE GROUP NO (SEE TABLE 2) -201
 LUG POLARIZATION, CENTER & INTERMEDIATE CONTACT TYPE: SEE TABLE 1

- MAX PANEL THK .156
- CONCENTRIC TWINAX 4 PIECE ASSY. FULL CRIMP NONINSULATED BULKHEAD MOUNT RECEPTACLE. SOCKET CENTER CONTACT AND PIN INTERMEDIATE CONTACT OR PIN CENTER CONTACT AND SOCKET INTERMEDIATE CONTACT
- FINISH: TFS-1U (500 HOURS SALT SPRAY; NICKEL)
- ALL DIM ARE IN INCHES

QTY	DESCRIPTION	PART NUMBER	ITEM
TOL UNLESS SPECIFIED	TROMPETER RF connectivity	BJ459ACFLP/FLS/PP/ PS/PP/RS/WP/WS	
.XX ± .03			
.XXX ± .010			
.XXXX ± .0050			
ANGLES 0°-30°			
DWN DKC 12-2-92	MATERIAL	CODE IDENT	DRAWING NO.
CHK DKC 12/9/92		14949	3-0117
ENGR			REV F
NEXT ASSY	APPR	SCALE 2/1	DATE 5-20-87 SHEET 1 OF 2